

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGQ 06/14/11'		



NOTES:

1. MATERIAL
1.1 INSULATOR:PBT(UL 94V-0).
1.2 CONTACT: 0.25t COPPER ALLOY.
2. SPECIFICATION
2.1 TEMPERATURE RANGE:-40~105°C.
2.2 CONTACT RESISTANCE:30mΩ max.
2.3 INSULATION RESISTANCE:1000MΩ min.
2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
3. PRODUCT NUMBER CODE:
DS1015-05 - X X X X




PACKING TYPE
T: TRAY
CONTACT PLATING
6: FULL MATT TIN
HOUSING COLOR
R: RED
No. OF CONTACTS
04 06 08 10 12 14
16 18 20 22 24

POSITIONS	DIM A	DIM B	DIM C
4	6.96	5.46	3.81
6	9.50	8.00	6.35
8	12.04	10.54	8.89
10	14.58	13.08	11.43
12	17.12	15.62	13.97
14	19.66	18.16	16.51
16	22.20	20.70	19.05
18	24.74	23.24	21.59
20	27.28	25.78	24.13
22	29.82	28.32	26.67
24	32.36	30.86	29.21

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	MICRO MATCH FEMALE RIGHT ANGLE THROUGH HOLE TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	SERIES DS1015-05 SERIES			
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1015-05-XXXX-A					

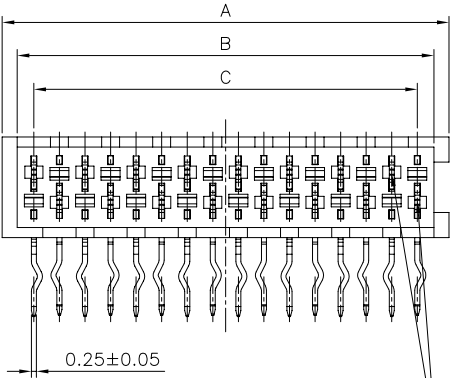

REFERENCE MATING INTERFACE PATTERN
1.27 STAGGERED PITCH x1.5 ROW DISTANCE.

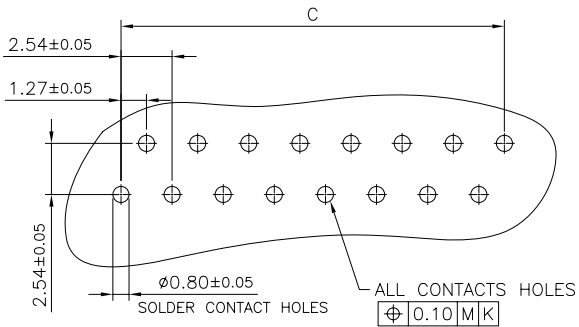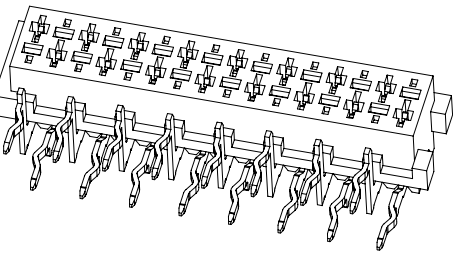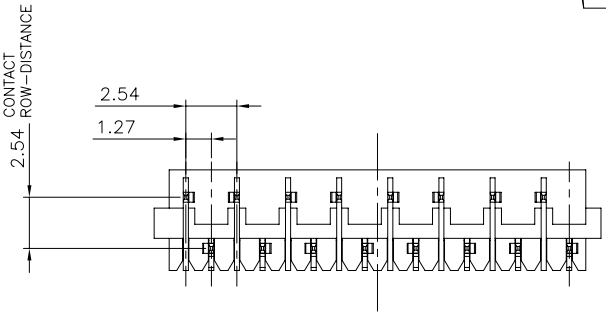

RECOMMEND PCB LAYOUT
(COMPONENT SIDE OF BOARD SHOWN)