
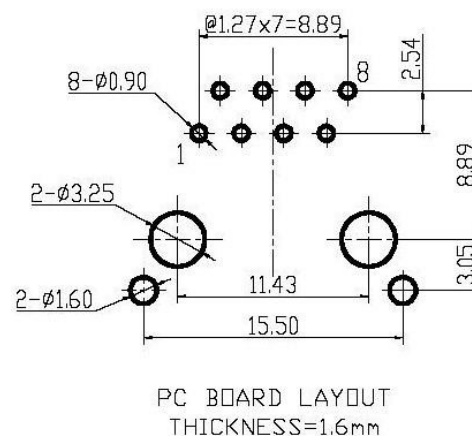


电气特性:

1. 额定电压: 125 VAC RMS
2. 额定电流: 1.5 AMP
3. 接触电阻: 35 m Ω MAX.
4. 绝缘电阻: 1000 M Ω MIN. @500 VDC
5. 耐压强度: 1000 V AC 或 1500V DC RMS @ 0.5mA 50 Hz 或 60 Hz 一分钟

△ 环境特性:

1. 储存温度: -40℃ ~ +85℃
相对湿度 < 80%
2. 工作温度: 0℃ ~ +70℃

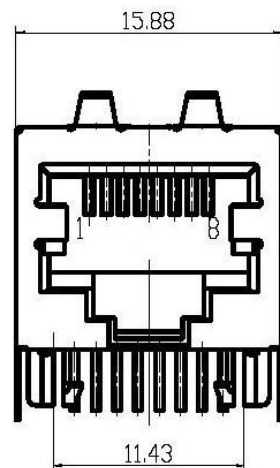

机构特性:

1. 塑壳材质: PBT黑色, UL94V-0;
2. 圆针材质: 磷青铜, $\phi 0.46$ mm;
3. 圆针电镀: 镍底, 表面全部镀金;
4. 铁壳材质: 黄铜, 厚度0.20mm, 镀镍;
5. 可靠性: 最少750次插拔.
6. 插入/拔出力: 22N / 2.27kg Max.
7. 配合强度: 57.83N Min.

NOTES:

ELECTRICAL:

- | | |
|--------------------------|--|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 35 MILLIOHMS MAX. |
| 4. INSULATION RESISTANCE | : 1000 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 1000 V AC OR 1500V DC RMS @ 0.5mA 50 Hz / 60 Hz 1 Minute |

MECHANICAL:

- | | |
|-----------------------------|--|
| 1. HOUSING&INSERT& MATERIAL | : PBT UL94V-0. COLOR BLACK |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\phi=0.46$ mm. |
| 3. SHIELD | : BRASS T=0.2mm PLATED NICKEL FOR ALL. |
| 4. PLATING | : GOLD PLATING OVER NICKEL. |
| 5. OPERATING LIFE | : 750 CYCLES MIN. |
| 6. MATING/UNMATING FORCE: | : 22N / 2.27kg Max. |
| 7. RETENTION STRENGTH: | : 57.83N Min. |

△ ENVIRONMENTAL:

1. STORAGE : -40℃ TO +85℃ RELATIVE HUMIDITY < 80%.
2. OPERATION : 0℃ TO +70℃.