

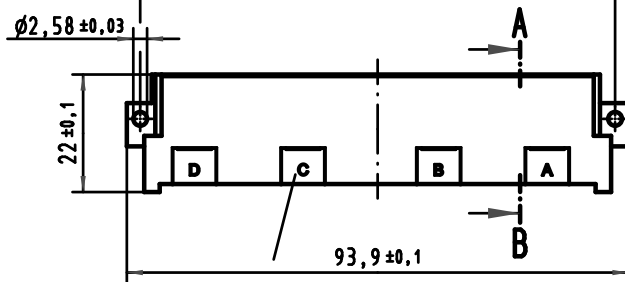
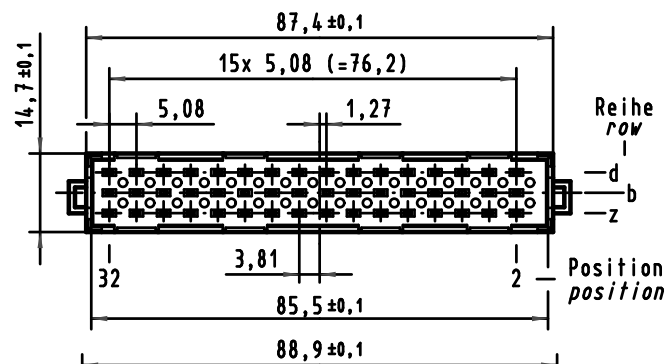
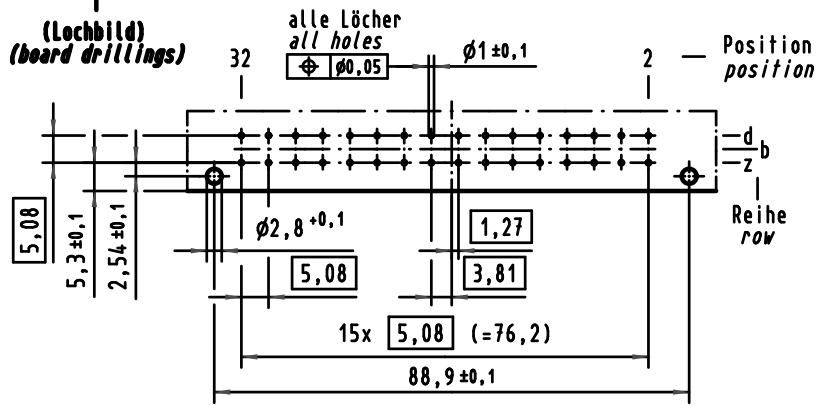


Y (Lochbild) (board drillings)





Sollbruchstelle für Kodierung
breaking point for coding

X



A-B
2:1


X Kontaktbelegung
contact loading

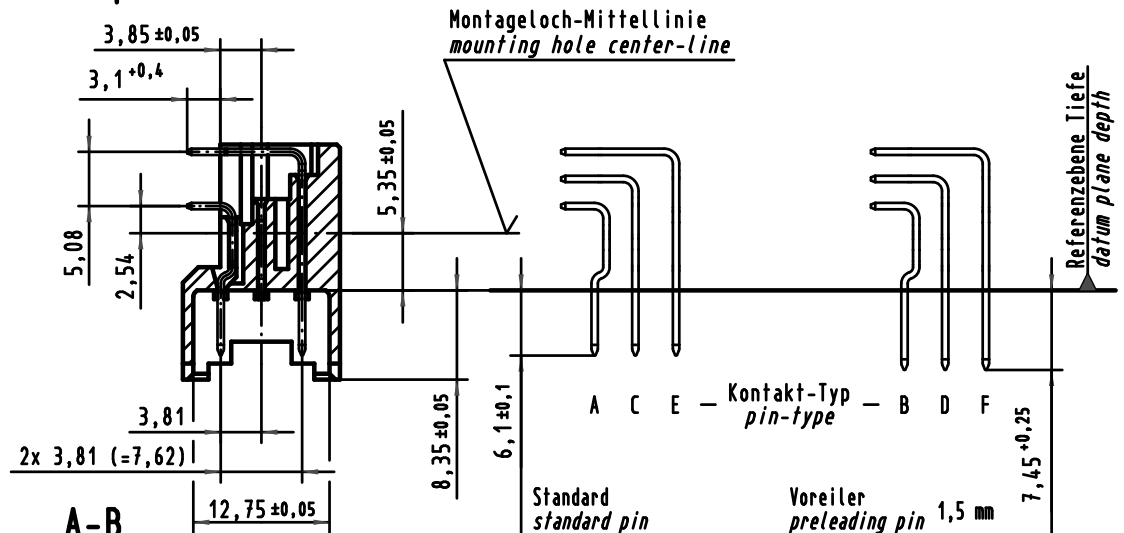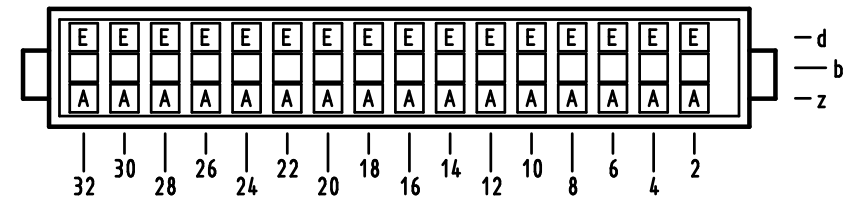

09 06 132 7931	3	Au flash over PdNi over Ni
09 06 132 6931	2	Au flash over PdNi over Ni
09 06 132 2931	1	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

Z
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:



All Dimensions in mm Original Size DIN A 3		
Mod.	Dat.	Name
35260	05.09.08	Hage.
32604	17.03.05	Hil
30386		

Techn. Character.			
	Dat.	Name	Maßstab/Scale
Detail.	29.01.02	Rie.	1:1 (2:1; 10:1)
Insp.	29.01.02	kfoe	
Stand.			
HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			

Nicht tolerierte Maß Free size tolerances IEC 60603-2	
Bauform / type F	
Messerleiste Einlöt gewinkelt 2,54 32 pol. male connector solder angled 2,54 32 pol.	
TB 09 06 132 x931	Blatt/ page
Sub.	