

60x60x25 mm


13.9~23.5 CFM




Specifications

Model	Bearing	Rating Voltage (VDC)	Power Current (mA)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dB(A))	Weight (g)	Curve
EE60251B1-000U-999	2BALL Sleeve	12	120	1.44	4500	23.5	0.21	34.5	50.0	1
EE60251B2-000U-999	2BALL Sleeve	12	70	0.84	3800	19.3	0.15	30.0	50.0	2
EE60251B3-000U-999	2BALL Sleeve	12	47	0.56	3000	13.9	0.08	20.0	50.0	3
EE60252B1-000U-A99	2BALL Sleeve	24	70	1.68	4500	23.5	0.21	34.5	50.0	1
EE60252B2-000U-A99	2BALL Sleeve	24	45	1.08	3800	19.3	0.15	30.0	50.0	2
EE60252B3-000U-A99	2BALL Sleeve	24	25	0.60	3000	13.9	0.08	20.0	50.0	3

Air Flow-Static Pressure Characteristics

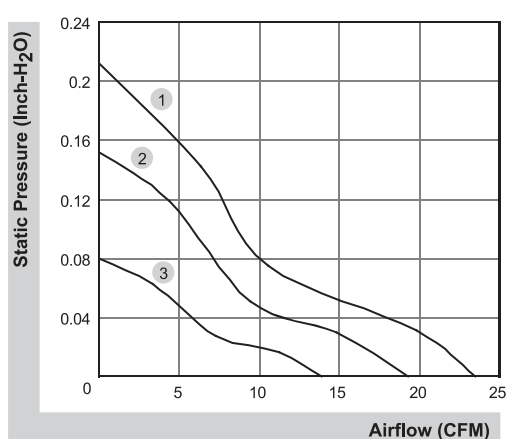

External dimensions(mm)

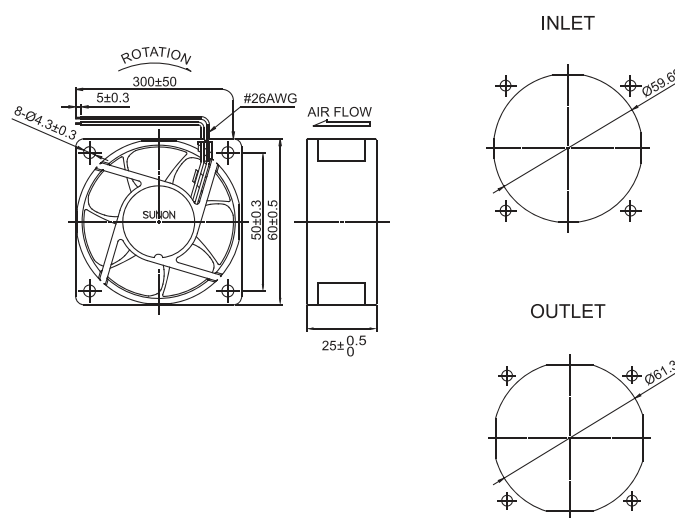

*All model could be customized. Please contact with Sunon Sales.

*Specifications are subject to change without notice. Please Visit SUNON website at <http://www.sunon.com> for update information.