

Ex50

LEAD-FREE SOLDERING SYSTEM **SOLDERING IRON**

TEMPERATURE CONTROLLED IRON

EF SERIES


- Built-in temperature controller.
- Usable on free-voltage(110~220V)
- Economy by ON/OFF switch.
- Feedback temperature recover system adopt.

Model No.	EF-25	EF-40	EF-65
Voltage	110V/220V	110/220V	110/220V
Power Consumption	25W	40W	65W
Tip Temperature	200~480℃	200~550℃	200~600℃
Insulation Resistance	100M Ω	100M Ω	100M Ω
Total Length	230mm	235mm	250mm
Weight	200g	210g	220g



EM 25 (EF-25)	
980 (EF-65)	

EM 40 (EF-40)	

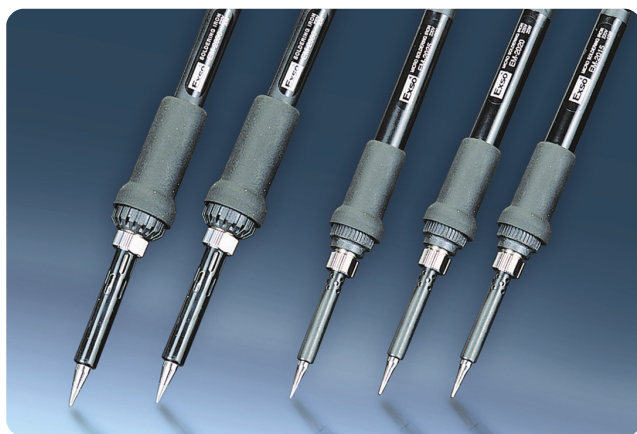

MICRO CERAMIC IRON

EM SERIES

- The high insulated ceramic heater is never overheats. An insulation factor of over 100M Ω can be maintained even during actual use.
- The compact, lightweight design with high cooling efficiency at the handle permits fatigue-free soldering over long periods for maximum work efficiency.

Model No.	EM2015	EM2020	EM2025	EM2030	EM2040
Voltage			220V/60Hz		
Power Consumption	15W	20W	25W	30W	40W
Tip Temperature	370℃	400℃	450℃	470℃	500℃
Insulation Resistance			100M Ω		
Total Length	227	227	227	227	227

EM 15 (EM-2015) (EM-2020)	
EM 40 (EM-2030) (EM-2040) (JH-20030) (JH-20040)	

EM 25 (EM-2025)	