

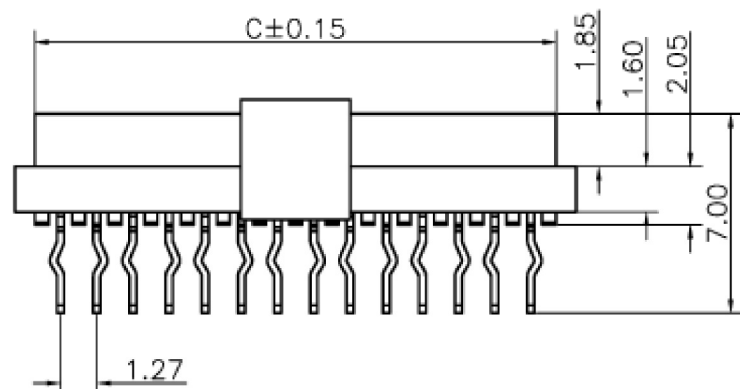
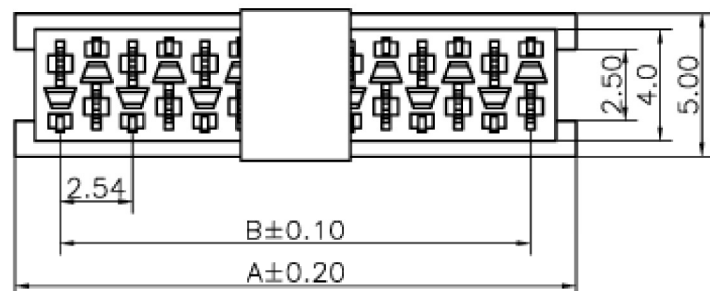


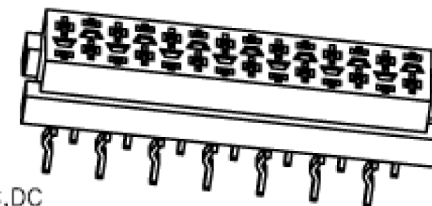

Pos	A	B	C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54




Specifications:

Current rating: 1.0A AC, DC
 Voltage rating: 30V AC, DC
 Contact resistance: 20m ohm Max
 Insulation resistance: 1000M ohm Min
 Withstanding voltage: AC 500V AC/minute
 Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Materials:
 Insulator: High Temp Plastic UL94V-0
 Contact material: Phosphor Bronze
 Finish: Tin Plated

How to Order

TMM-X-X-XX-X

Type	Packaging
1-IDC Male	1 - Tape & Reel
2-IDC Plug	2 - Tube
3-DIP Male Straight	3 - Bag
4-DIP Female Straight	
5-DIP Female R/A	
6-SMT Female Straight	
Locking System	Number of Positions
0-without lock	04, 06, 08, 10, 12,
L-with lock	14, 16, 18 or 20

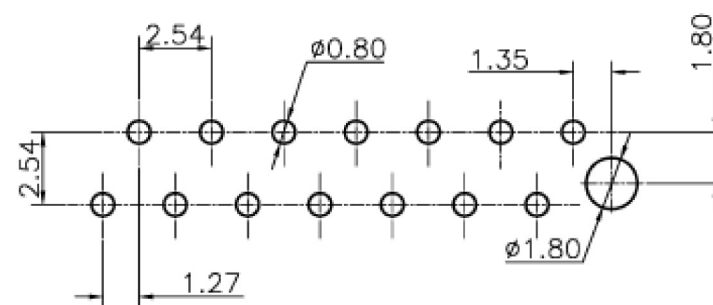

PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE Micro Match Dip type Female		AMPHENOL Amphenol European Design Center	
X, ±0.3	DESIGNED Stephane	2006/04/22			Scale N.A.	Sheet 1 of 1
XX, ±0.1	CHECKED Rob K.	2006/04/23				
XXX, ±0.05	APPROVED Rob K.	2006/04/23				
UNLESS OTHERWISE SPECIFIED		UNIT : 	SIZE : A4	DRAWING N° TMM-4-0-XX-X		REV. A