

Connectors

Micro USB Connectors



KLS1-233 Micro USB Connector With B Type Female SMT

Material:

The rubber core: LCP UL94V-0
Terminal: C2680R-H, Gold plated
Shell: C2680F-H, Surface plating tin 100 μ or All the gold 1 μ "

Main features:

Rated current: 0.5A
The contact impedance: 30 m Ω max.
Insulation resistance: 100M Ω Min 250V DC
Withstanding Voltage: 250V AC
Solderability: temperature 235 $\pm$ 5 $^{\circ}$ C, time 5 $\pm$ 0.5s
Back PIN force: 0.5kgf Min.
Service life: 10000 times
Operating temperature: -30 $^{\circ}$ C ~+80 $^{\circ}$ C

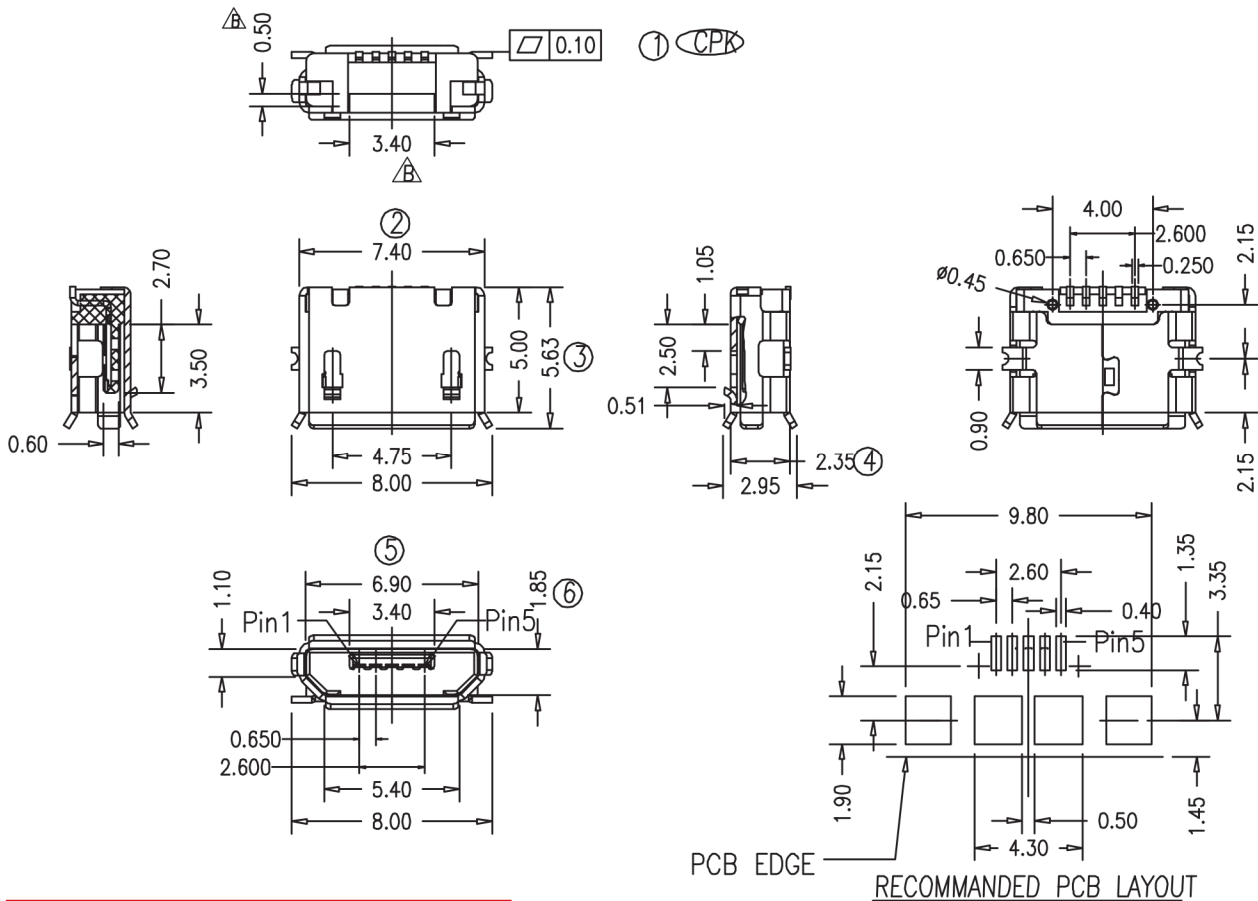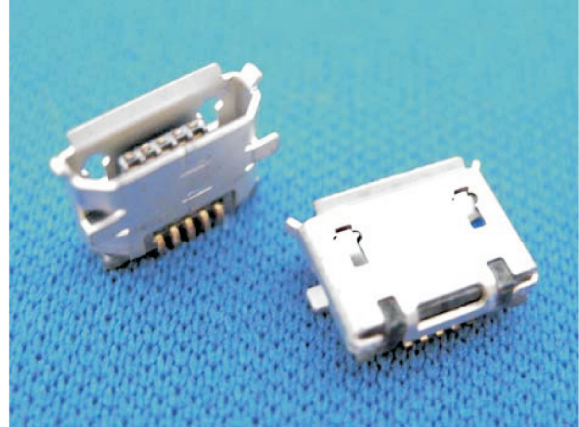

ORDER INFORMATION

Product NO.: KLS1-233 - 0 - 0 - 0 - R

Pos. NO.	T-Tube packing	P-Blister tray packing	R-Reel packing
Micro USB Connector With B Type Female SMT	0-Without Mylar	1-With Mylar	
0-Without Post	1-With Post	0-Gold plated	1-Matte Tin plated

Connectors

Micro USB Connectors

KLS1-233 Micro USB Connector With B Type Female SMT

Material:

The rubber core: LCP UL94V-0

Terminal: C2680R-H, Gold plated

Shell: C2680F-H, Surface plating tin 100 μ or All the gold 1 μ "

Main features:

Rated current: 0.5A

The contact impedance: 30 m Ω max.

Insulation resistance: 100M Ω Min 250V DC



Withstanding Voltage: 250V AC

Solderability: temperature 235 $\pm$ 5 $^{\circ}$ C, time 5 $\pm$ 0.5s

Back PIN force: 0.5kgf Min.

Service life: 10000 times

Operating temperature: -30 $^{\circ}$ C $\sim$ +80 $^{\circ}$ C

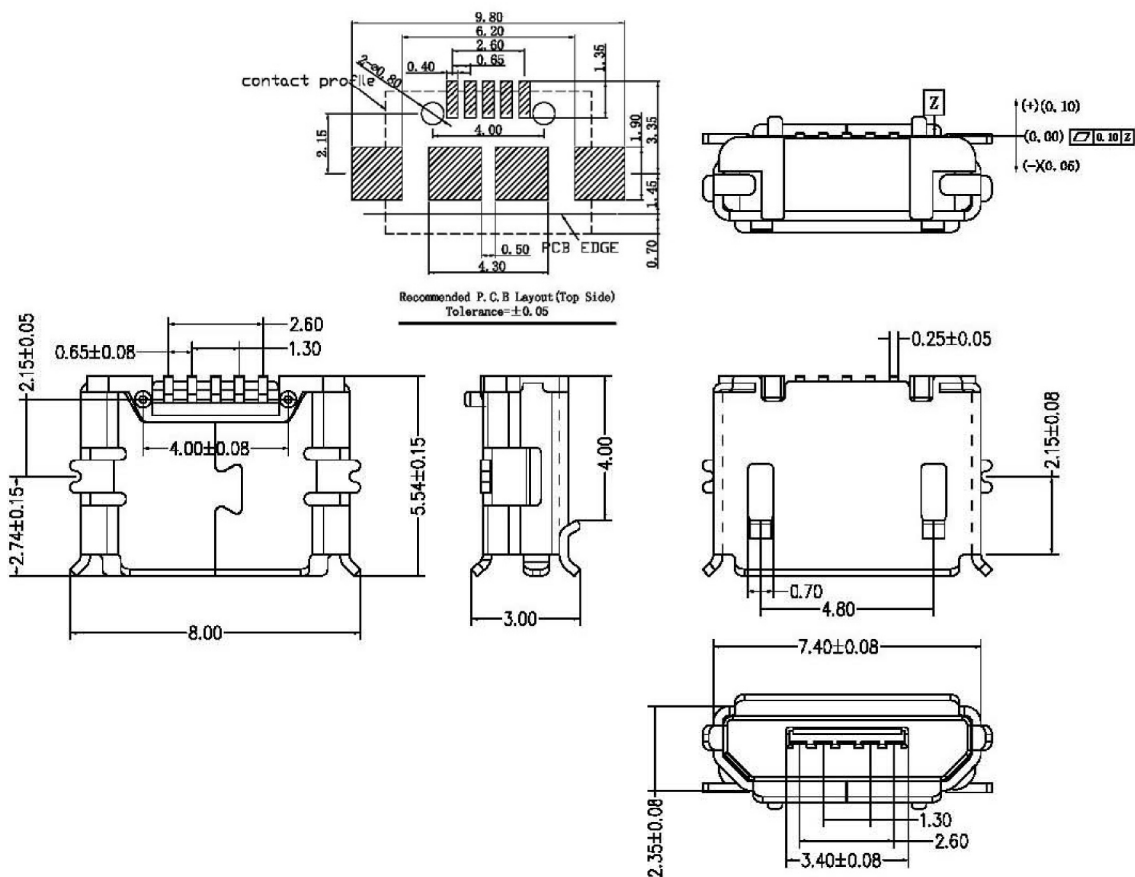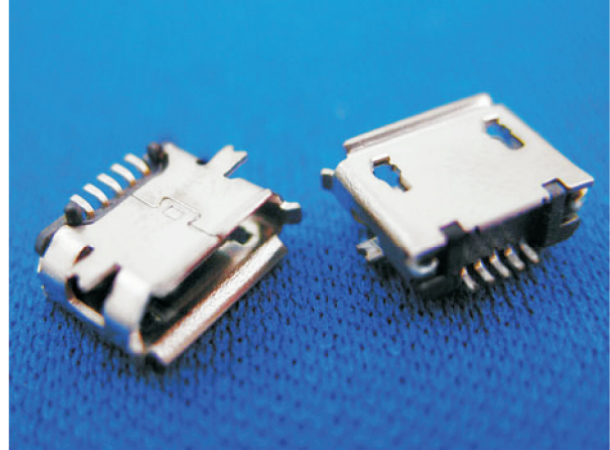

ORDER INFORMATION

Product NO.: KLS1-233 - 1 - 0 - 0 - R

Pos. NO. _____ T-Tube packing P-Blister tray packing R-Reel packing
Micro USB Connector With B Type Female SMT _____
0-Without Post 1-With Post _____ 0-Gold plated 1-Matte Tin plated