

SWITCH / TACT SWITCH

SS204
6x3.6x2.5

Surface mount type tact switch, up to 50mA 12VDC
body 6.0mm X 3.6mm, 2.5mm height

PDF Download

Get Information



 ZOOM IN

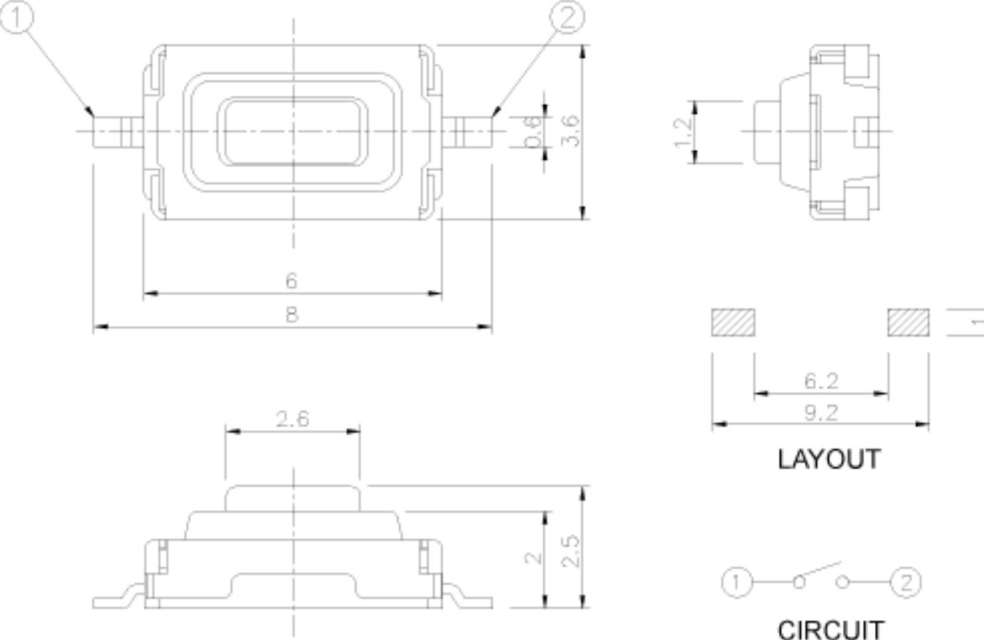
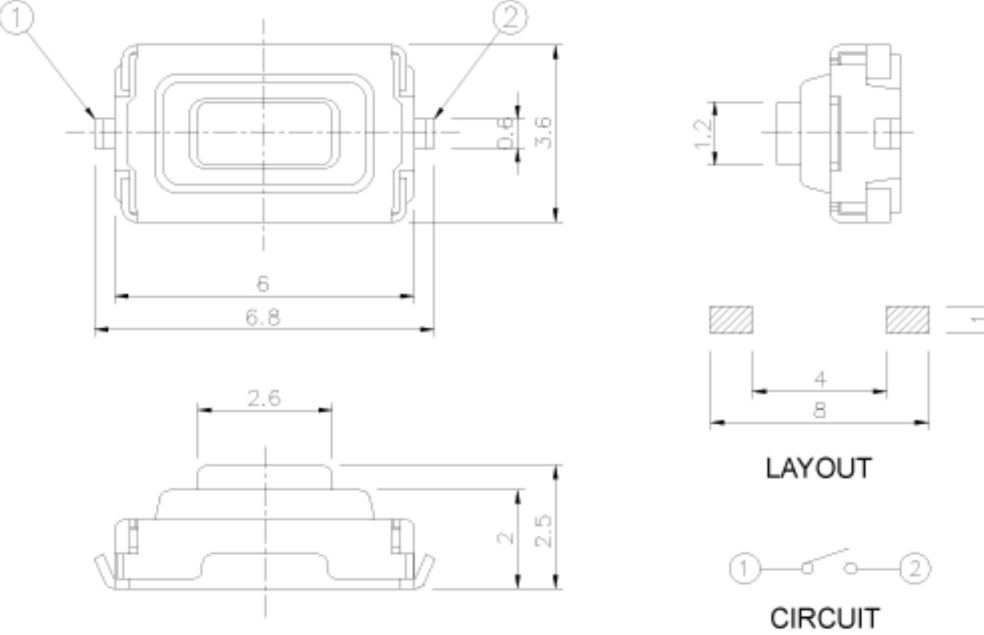
Feature

- Rating: 50mA 12VDC
- Action: SPST, push on
- Initial contact resistance : 100m ohm (max.)
- Insulation resistance : 100M ohm (min,) at 100VDC
- Dielectric strength : 250VAC for 1 minute
- Electrical life : 50,000 cycles for force: 160gf+/-50 , 30,000 cycles for 260gf+/-50
- Operating Temperature: -20 °C ~ + 70 °C
- Packaging: Tape & reel
BS type 2500 PCs/reel
BJ type 3000 PCs/reel

How to order

SS204	BS	16
SERIES SYMBOL	POST TYPE	OPERATING FORCE
	BS 	16 160g
	BJ 	26 260g
	J-bent	

Specification

SS204BS	 Technical drawing of the SS204BS component. The top view shows a square component with a central rectangular opening. Dimensions include a width of 8, an inner width of 6, a height of 3.6, and a central opening width of 0.6. A side view shows a height of 2.5 and a base width of 2.6. The layout view shows a square footprint with a width of 9.2 and a height of 1.2. The circuit diagram shows a switch with terminals 1 and 2.
SS204BJ	 Technical drawing of the SS204BJ component. The top view shows a square component with a central rectangular opening. Dimensions include a width of 6.8, an inner width of 6, a height of 3.6, and a central opening width of 0.6. A side view shows a height of 2.5 and a base width of 2.6. The layout view shows a square footprint with a width of 8 and a height of 1.2. The circuit diagram shows a switch with terminals 1 and 2.

 Start Print