
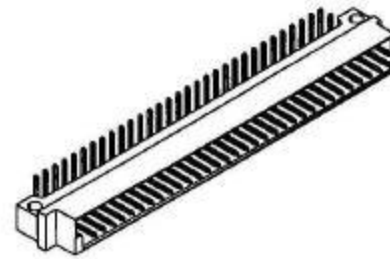


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

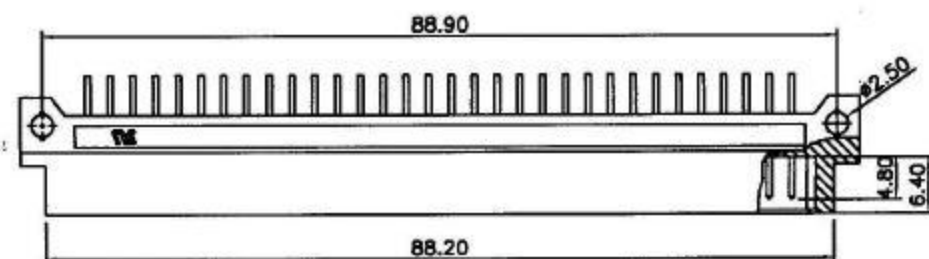




Material:

Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Brass.



Electrical Characteristics:

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V for 1 minute.
Insulator Resistance: 1000MΩ min. at DC 500V.
Contact Resistance: 30mΩ max. at DC 100m A.
Operating Temperature: -55°C ~ +105°C .

*** RoHS Compliant**

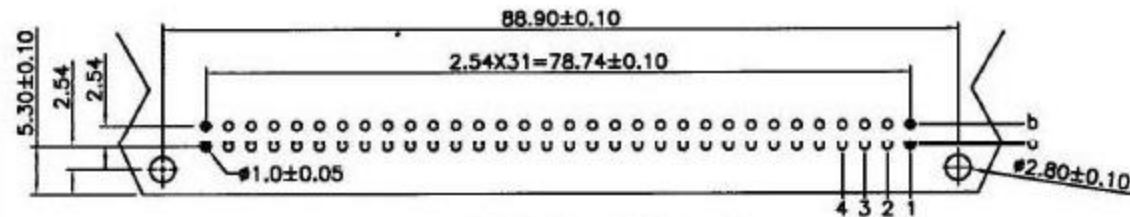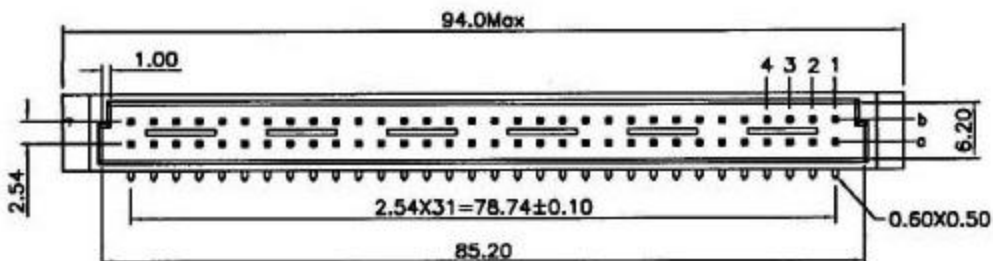

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange	P/N
2.54mm	64	a b		C4162-64MCARX0R
	32	a -		C4162-32MAARX0R

1 2 3 4 5 6 7 8