SELEC COUNTERS XC410 COUNTERS

Select Automation Tuning your needs An ISO 9001:2008 Certified Company

sales@selectautomation.net
www.selectautomation.net





Technical Specifications

| - | |
|---------------------------|--|
| Display | Seven segment LED; Height: 0.3" |
| Digits | 6 digits |
| Sensor Type | NPN / PNP |
| Input Type | Voltage pulse (3 to 30 VDC) from proximity switches, solid state devices, potential free contact encoder |
| Input Speed | a) 0 to 20 Hz b) 0 to 1 kHz |
| Range | 999999 counts |
| Counting Direction | Up |
| Reset | Front, Remote |
| Memory Retention | Yes |
| Sensor Supply | Inbuilt, 12 VDC, 30 mA |
| Supply Voltage | 90 to 270 VAC/DC |
| Temperature | Operating: 0 to 50°C Storage: -5 to 50°C |
| Humidity (non-condensing) | 95% RH |
| Weight | 95 gms |
| Certifications | (€ Я) |

1 2

6 DIGIT TOTALISER Ordering Information


Terminal Connections

+12V CNT COM RST

3 4 5 6

XC410

Dimensions (in mm)

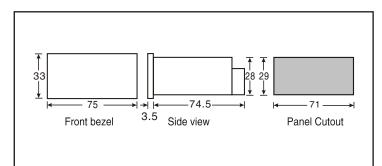

7

Front RST _____ Slow speed Enable

8 9 10 11 12

Ν

-6