


Mikroprzełącznik AH7121 nr kat. 02645

CHARACTERISTICS		Rating	10A 125VAC or 250VAC
		Terminal	
		Item No.	
Contact resistance	25mΩ max. (initial)	OF max.	180g
Insulation resistance	100MΩ min. (at 500 VDC)	RF min.	50g
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute between	PT max.	11.0mm
Mechanically service life	1,000,000 operations min.	OT min.	3.0mm
Electrically service life	100,000 operations min.	MD max.	2.4mm
		OP	42±1.9mm
		FP	---

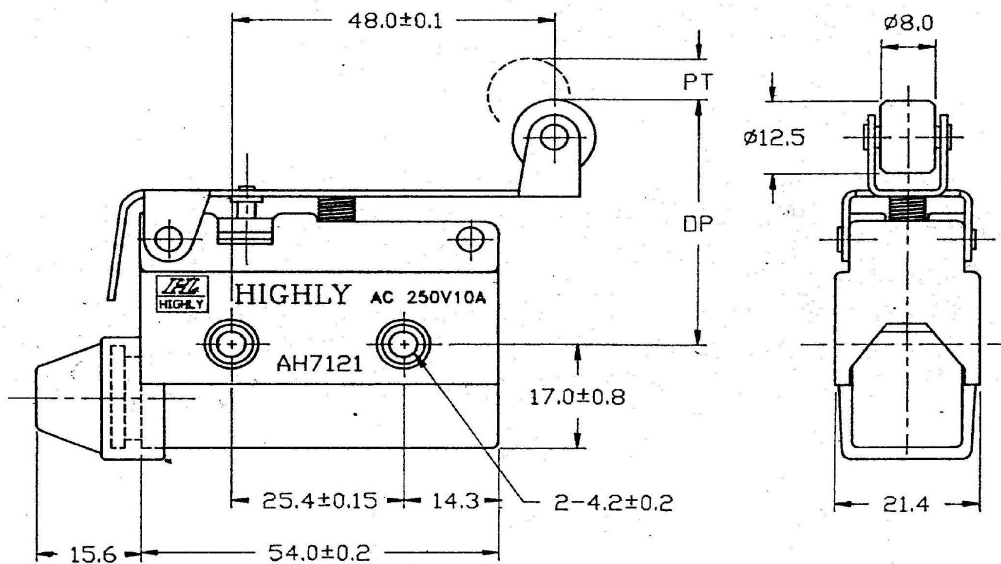

海立電氣有限公司
HIGHLY ELECTRIC CO LTD

修正REVISION	日期DATE	說明DESCRIPTION	審核CHECKED 劉克威	單位UNIT m/m	材質MATERIAL	日期DATE 81.10.27	料號 TYPE NO.	AH7121
			繪圖DRAWN LIU	比例SCALE 1=1	公差TOLERANCE ±0.15	加工PROCESS	檔名 FILE NO.	AH7121