

2000 Slide Switches - up to 5 position 10A 250Vac



- ▶ Slide switches
- ▶ Ratings up to 16A, 250V ac
- ▶ PCB and solder terminals
- ▶ 2, 3, 4 and 5 position
- ▶ Choice of circuits
- ▶ Choice of actuators

Approvals and specifications



10A 250Vac T85
6(3)A 250Vac T85



UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Technical data on pages 4 & 5.

T 2 2 20 5 C ---

TERMINAL SERIES POSITIONS CIRCUIT SLIDER BODY PRINT, COLOUR, ETC

slide switches

▶ TERMINAL	▶ SERIES	▶ POS'N	▶ CIRCUIT Viewed from back	▶ SLIDER			
K 2.8 x 0.8	2	2 Switching positions	10 	0 	6 	D 	L Limited travel on 2 pos
R 2.8 x 0.8			20 	1 Not 2 position	7 	E Limited travel on 2 pos	N
T Solder			30 	2 Q2.0 Hole	9 	G Not 2 position	P Limited travel on 2 pos
X PCB 0.8 Sq.			40 	3 Q2.5 Slot	A 	H 	R
Y PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales		3 Switching positions	10 	4 Q2.5	B Not 2 position	J Not 2 position	S Limited travel on 2 pos
			20 	5 Also with legend	C 	K Limited travel on 2 pos	T
			30 				
			40 				
		4 Switching positions	10 				
			20 				
			30 				
			40 				
		5 Switching positions	10 				
			20 				
			30 				
			40 				



X22205C ---



T2220EC ---



T23206A ---



T24306A ---




T25302A ---




T25100A ---

BODY


C 2 positions




H 2 positions




A 3 positions




H 3 positions




A 4 positions



H 4 positions



A 5 positions




OPTIONS

Colour


For custom slider colours call sales. A full range is available for large orders

DIMENSIONS (mm)


2 Position C body




2 Position H body





Cut-out/PCB Matrix




3 Position A body





3 Position H body





4 Position A body



4 Position H body



5 Position A body



2000 Slide Switches - Snap fit and panel mount 10A 250Vac



- ▶ 2 way 'voltage selector'
- ▶ Ratings up to 16A, 250V ac
- ▶ Snap fit and panel mount
- ▶ PCB & solder terminals
- ▶ 2 and 3 position
- ▶ Choice of circuits
- ▶ Choice of actuators

Approvals and specifications



10 A 250Vac T85
6(3)A 250Vac T85



UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

Technical data on pages 4 & 5.

115/230 is preferred legend

T 2 2 20 5 B ---

TERMINAL SERIES POSITIONS CIRCUIT SLIDER BODY PRINT, COLOUR, ETC

slide
switches

TERMINAL	SERIES	POS'N	CIRCUIT Viewed from back	SLIDER
K 2.8 x 0.8			10 20 30 40 	0 2 Pos B Body only 6 2 & 3 Pos B Body only C 2 & 3 Pos B Body only L 2 & 3 Pos B Body only Limited travel on 2 pos S Limited travel on 2 pos 2 & 3 Pos B Body only
R 2.8 x 0.8		2 Switching positions	2 2 Pos B Body only 7 2 & 3 Pos B Body only D 2 & 3 Pos B Body only M F Body only Legend optional T 2 & 3 Pos B Body only 	2 2 Pos B Body only 7 2 & 3 Pos B Body only D 2 & 3 Pos B Body only M F Body only Legend optional T 2 & 3 Pos B Body only
T Solder	2		10 20 30 40 	3 2 & 3 Pos B Body only 8 E Body only Legend optional E 2 Pos B Body only Limited travel on 2 pos N 2 Pos B Body only
X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales		3 Switching positions	20 30 40 	4 2 & 3 Pos B Body only 9 2 & 3 Pos B Body only H 2 Pos B Body only P 2 & 3 Pos B Body only Limited travel on 2 pos R 2 & 3 Pos B Body only
			5 2 Pos B Body only Also with legend A 2 Pos B Body only K 2 & 3 Pos B Body only Limited travel on 2 pos R 2 & 3 Pos B Body only 	5 2 Pos B Body only A 2 Pos B Body only K 2 & 3 Pos B Body only Limited travel on 2 pos R 2 & 3 Pos B Body only



T22208E ---



T22308E ---



T2230MF ---



T22205B ---




T22305B ---




T23204B ---

BODY

B With mounting holes




E Snap fit



Cut-outs must be punched in the direction of insertion

F Snap fit (single pole ON OFF only)



Cut-outs must be punched in the direction of insertion

OPTIONS

Colour

For custom slider colours call sales. A full range is available for large orders

Standard body colour is black

Legend printing


A wide range is available

For all options call sales


DIMENSIONS (mm)

Cut-out / PCB Matrix



2 Pos B

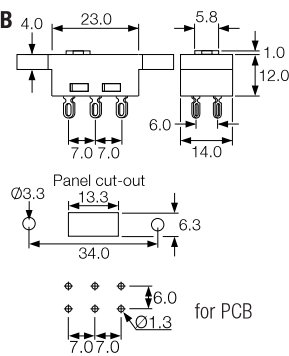

3 Pos B

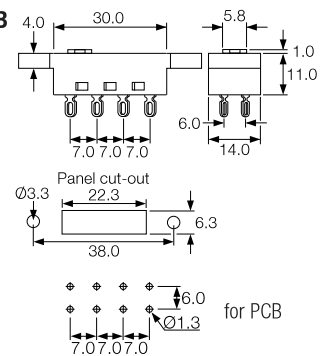

2 Pos E



2 Pos F

