


Złącze ZIFF 20p 1,0mm SMD do LCD 320x240 nr kat 17568

raster 1.0mm Złącze SMD kontakt dolny 20pin
dedykowane do modułu TFT 3,5" 320x240

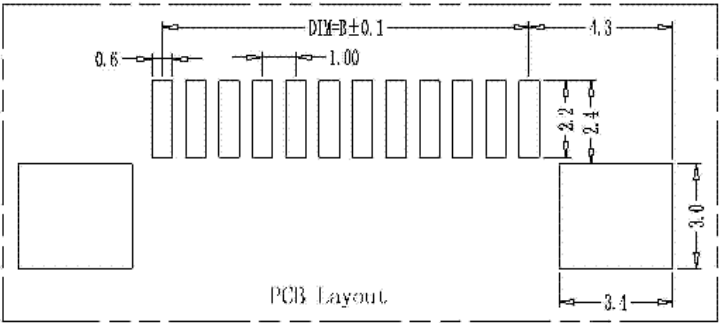

Electrical Characteristics:
Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: -25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 800\text{m}\Omega$
Relative Humidity: 93%+40°C

Material Description:
Contact: Phosphor Bronze Tin-Leadplated
Solder Tab: Phosphor Bronze Tin-plated
Housing: Thermoplastic(UL94V-0)
Slider: Thermoplastic(UL94V-0)

PIN	DIM=A	DIM=B	DIM=C	DIM=D
30P	36.4	29.00	37.0	31.10
29P	35.4	28.00	36.0	30.10
28P	34.4	27.00	35.0	29.10
27P	33.4	26.00	34.0	28.10
26P	32.4	25.00	33.0	27.10
25P	31.4	24.00	32.0	26.10
24P	30.4	23.00	31.0	25.10
23P	29.4	22.00	30.0	24.10
22P	28.4	21.00	29.0	23.10
21P	27.4	20.00	28.0	22.10
20P	26.4	19.00	27.0	21.10
19P	25.4	18.00	26.0	20.10
18P	24.4	17.00	25.0	19.10
17P	23.4	16.00	24.0	18.10
16P	22.4	15.00	23.0	17.10
15P	21.4	14.00	22.0	16.10
14P	20.4	13.00	21.0	15.10
13P	19.4	12.00	20.0	14.10
12P	18.4	11.00	19.0	13.10
11P	17.4	10.00	18.0	12.10
10P	16.4	9.00	17.0	11.10
9P	15.4	8.00	16.0	10.10
8P	14.4	7.00	15.0	9.10
7P	13.4	6.00	14.0	8.10
6P	12.4	5.00	13.0	7.10
5P	11.4	4.00	12.0	6.10
4P	10.4	3.00	11.0	5.10

