



SR 系列 SERIES

旋转开关 ROTARY SWITCHES

■ 主要用途 MAIN APPLITATION


- 照明设备档位的调整.....Lighting equipment adjustment
- 音频信号的选择.....Signal selection of audios
- 工业设备控制.....Industrial equipment control
- 精密机械控制.....exact machinery control
- 功放.....Public audio system
- 汽车.....Automobile
- 通讯设备.....Communication equipment
- 家电.....White goods market
- 其它市场.....Other markets



■ 规格 SPECIFICATION

- 额定值: 350mA@125VAC / 150mA@250VAC
- 使用温度: -30℃~85℃
- 最大工作电压: 250VAC/DC
- 承载能力: 5A non-switching
- 绝缘电阻: 100 MΩ min
- 止档力矩: 80cN.m MIN
- 电器寿命: ≥10,000 次
- 旋转力矩: 6+1/-1cN.m
- 耐压强度: 1500V Max

■ 外形图 OUTLINE DRAWING

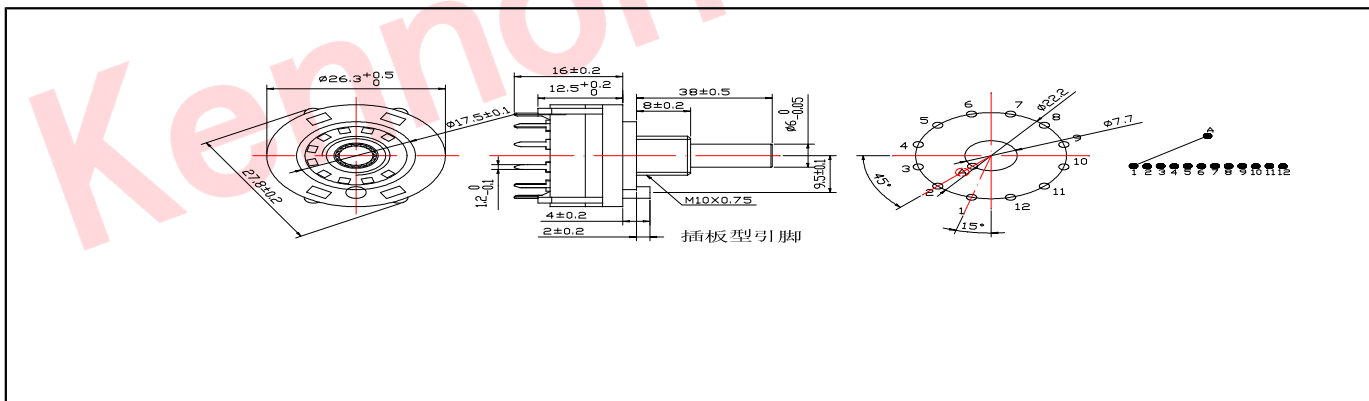



■ 焊接 SOLDERING

焊接操作应在尽可能短的时间内完成，焊烙铁触点的最高温度和允许时间最好低于 260°C，3 秒钟以内。

Soldering operation must be completed in a time as soon as possible suggested maximum solder-iron tip temperature and allowable time is at 235°C for 3 second.