
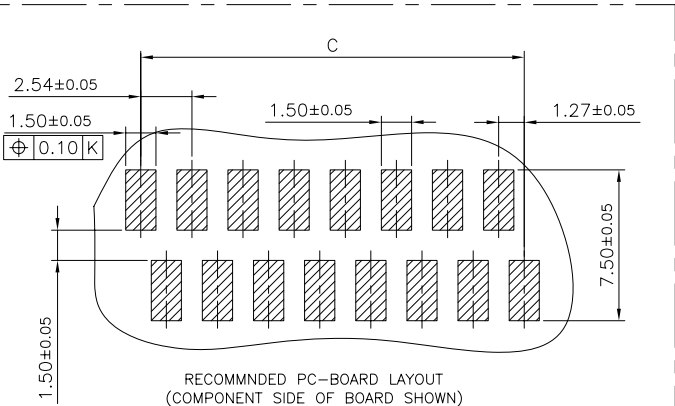
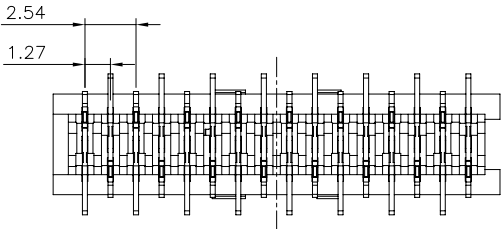

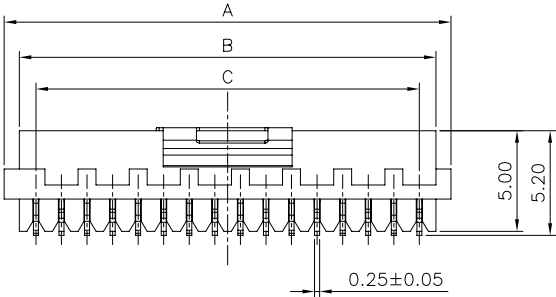
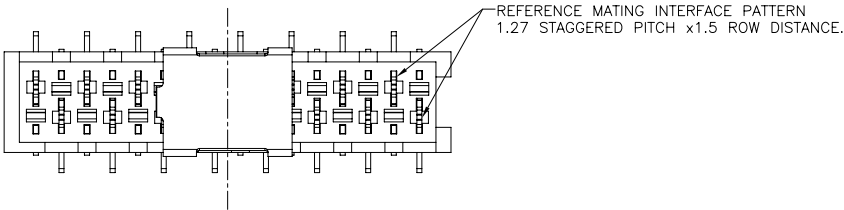


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	DGQ 06/14/11'		

- NOTES:
- MATERIAL
 - INSULATOR:HIGH TEMP. NYLON-46(UL 94V-0).
 - CONTACT: 0.25t COPPER ALLOY.
 - PICKUP: 0.15t STAINLESS STEEL.
 - SPECIFICATION
 - TEMPERATURE RANGE:-40~105°C.
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
 - PRODUCT NUMBER CODE:
 DS1015-06 - X X X X X
 - PACKING TYPE
 T: TRAY
 R: TAPE ON REEL
 B: TUBE
 - PICKUP SUPPORT
 X: W/O MYLAR
 S: W MYLAR
 - CONTACT PLATING
 6: FULL MATT TIN
 - HOUSING COLOR
 R: RED
 - No. OF CONTACTS
 04 06 08 10 12 14
 16 18 20 22 24

POSITIONS	DIM A	DIM B	DIM C
4	6.96	5.46	3.81
6	9.50	8.00	6.35
8	12.04	10.54	8.89
10	14.58	13.08	11.43
12	17.12	15.62	13.97
14	19.66	18.16	16.51
16	22.20	20.70	19.05
18	24.74	23.24	21.59
20	27.28	25.78	24.13
22	29.82	28.32	26.67
24	32.36	30.86	29.21

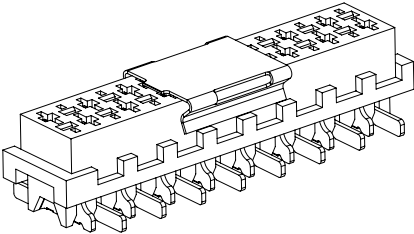

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		MICRO MATCH FEMALE VERTICAL SMT TYPE			
X.	±0.60	X.	±5°	UNITS	mm						
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1015-06 SERIES				
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD							
DRAWING TYPE										CUSTOMER	
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.		C-DS1015-06-XXXXX-A									