



\* The specification subject to change without notice." "The drawing is for reference only.

# R13-507

## Screw Type

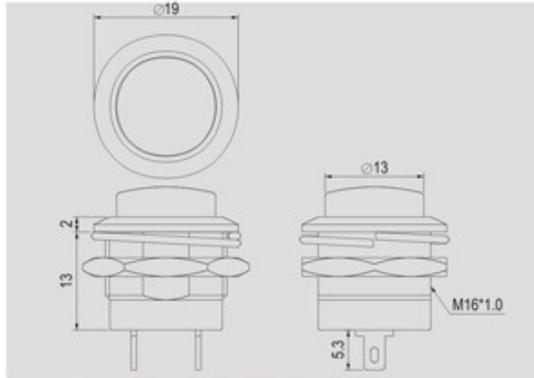

<b>Rating</b>
6A 125V AC 3A 250V AC
<b>Contact resistance</b>
50mΩ Max
<b>Insulation resistance</b>
DC 500V 100MΩ Min
<b>Dielectric strength</b>
AC 1000V 1 minute
<b>Cut-out</b>

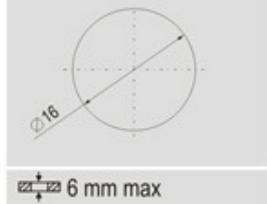

### FEATURES

- \* MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- \* M type are metal frames, nickel plated brass.
- \* Mounted by nut.

### R13-507

BODY		FUNCTION	TERMINAL
<b>P</b> Plastic Body	<b>M</b> Metal Body	<b>A</b> OFF 2P SPST (ON)	<b>0 5</b> SO
		* ( ) =momentary	