

# TERMINAL BLOCK Connector



## PCB Series

KLS2-350-3.50/3.96 Series Pitch=3.50mm/3.96mm

### Electrical :



- Rated voltage: 300V
- Rated current: 10A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: AC1500V/1Min
- Wire range: 24-18AWG 2.5mm<sup>2</sup>

### Material

- Screws: M2.5 steel Zinc plated
- Wire guard: phosphor bronze Ni plated or stainless steel
- Pin header: Brass, Tin plated
- Housing: PA66, UL94V-0

### Mechanical

- Temp. Range: -30°C~+120°C
- MAX Soldering: +250°C for 5 Sec.
- Torque: 0.5Nm (4.5lb.in)
- Strip length: 4.5-5mm

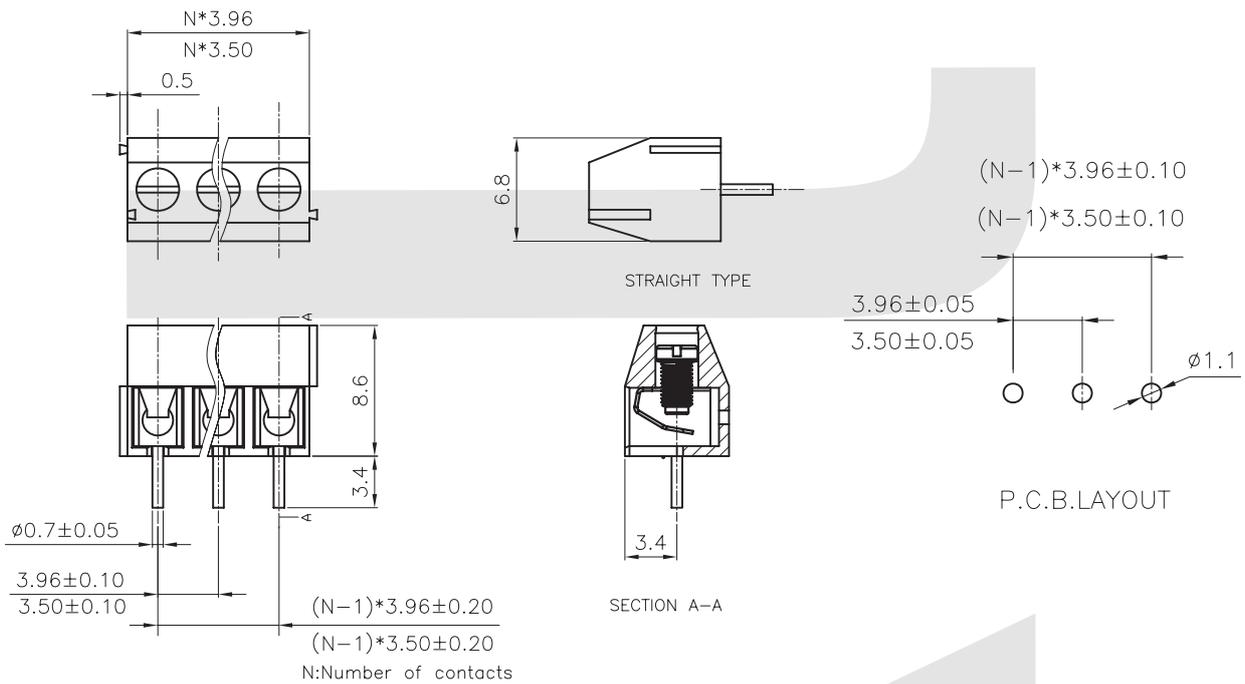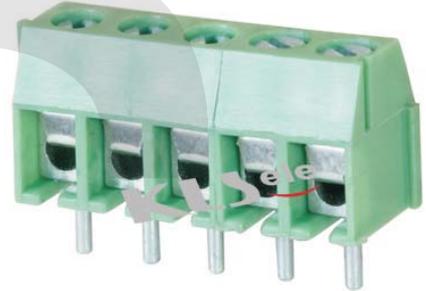

## ORDER INFORMATION

Product NO.: KLS2-350-3.50-XXP X X X

- Pos. NO. \_\_\_\_\_
- Series No. \_\_\_\_\_
- Pitch: 3.50=3.50mm 3.96=3.96mm
- Number of Pole \_\_\_\_\_
- Customer Request \_\_\_\_\_
- Screw: C=Cross Screw S=Slot Screw
- Color: 1=Gray 2=Blue 3=Black  
4=Green 5=Orange 6=Red  
7=Transparent 8=Yellow 9=White