



MAB 5 S

Industrial Connectors:Connectors for audio, video and data:Miniature multipole connectors:without locking screw:Panel-mounted sockets


Delivery informations

Availability	available
Document created at	18.11.2009

Product description

Type	MAB 5 S
Order No.	930 071-200
Type of contact	female
Description	panel-mounted socket with flange; solder joint
Number of contacts	5
Conductor size	$\leq 0.34 \text{ mm}^2$

Drawing

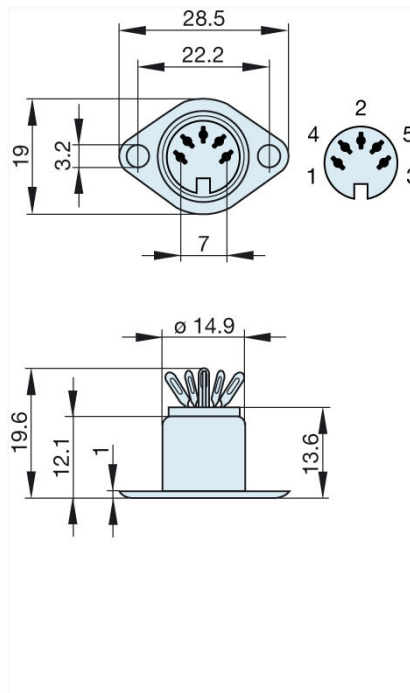

Technical data

LF output "Phone"	EN 60 130-09
Pole arrangement DIN	DIN 41 524
Rated current	4 A
Rated voltage	AC/DC 34 V
Type of termination	solder

Material

Contact material (socket)	brass
Contact surface material	tin plated

Contact bearer material	PA 66/UL standard 94V-2
Housing material	steel, nickel-plated
Environmental conditions	
Protection class (IEC 60529)	IP 30
Temperature range	-20 °C to +60 °C