

Common features

- Instant ejection of relay by plastic retaining clip
- Integral coil indication and protection circuit
- 35 mm rail (EN 60715) mounting

6.2 mm wide

- EMR - DC, AC or AC/DC coil versions
- SSR - DC or AC/DC input versions
- Screw and Screwless terminal options

**EMR
Electromechanical Relays**


- 1 CO - 6 A 250VAC

Page 1

**SSR
Solid State Relays**


- Single solid state output:
Options **0.1A 48VDC, 2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 2


6.2 mm wide

- Special coil / input leakage current suppression types
- EMR - AC or AC/DC coil versions
- SSR - AC or AC/DC input versions
- Screw and Screwless terminal options

38.51.3... - 38.61.3...


- 1 CO - 6 A 250VAC

Page 1

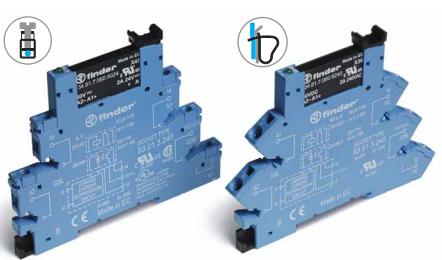38.81.3... - 38.91.3...


- Single solid state output:
Options **0.1A 48VDC, 2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 2

6.2 mm wide

- Timed Interface module
- 4 functions & 4 time scales 0.1s ... 6h
- EMR - AC/DC (12 or 24V) supply versions
- SSR - AC/DC (24V) supply
- Screw terminals

38.21


- 1 CO - 6 A 250VAC

Page 3


38.21...9024-8240


- Single solid state output:
Options **2A 24VDC, 2A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 3


14 mm wide

- 2 pole 8 A or 1 pole 16 A
- EMR - DC or AC/DC coil versions
- SSR - DC input versions
- Screw and Screwless terminal options

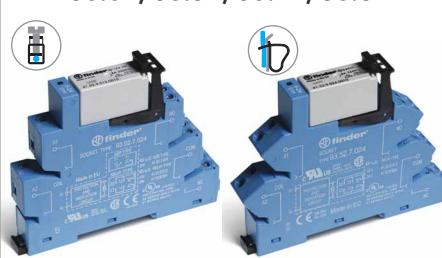38.01/38.52/38.11/38.62


- 1 CO - 16 A 250VAC
- 2 CO - 8 A 250VAC

Page 4

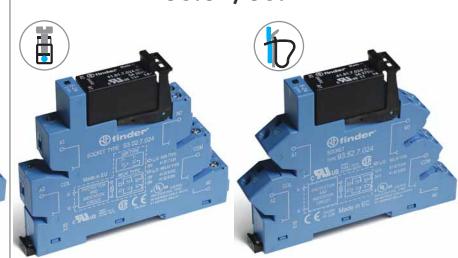38.31/38.41


- Single solid state output:
Options **5A 24VDC, 3A 240VAC**
- Silent, high speed switching
- Long electrical life

Page 5

38 Series - Relay interface modules - 1 Pole 6 A EMR

Features

1 Pole - 6 A electromechanical relay interface modules, 6.2 mm wide.

Ideal interface for PLC and electronic systems

- Sensitive DC coil or AC/DC coil versions
- Integral coil indication and protection circuit
- Instant ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

38.51 / 38.51.3
Screw terminal



38.61 / 38.61.3
Screwless terminal



38.51/61



38.51.3 / 38.61.3




B

- 1 pole electromechanical relay
- Screw terminal and screwless terminal
- 35 mm rail (EN 60715) mounting

- Leakage current suppression
- 1 pole electromechanical relay
- Screw terminal and screwless terminal
- 35 mm rail (EN 60715) mounting

* Special version for max ambient temperature +70°C.

For outline drawing see page 12

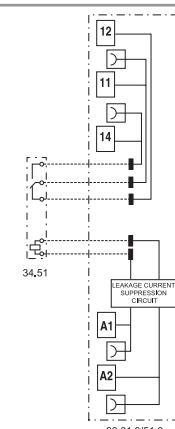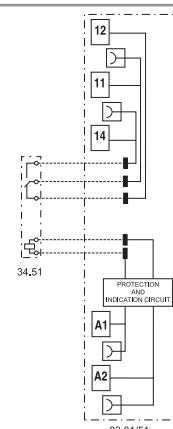

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current A		6/10	6/10
Rated voltage/Maximum switching voltage V AC		250/400	250/400
Rated load AC1 VA		1,500	1,500
Rated load AC15 (230 V AC) VA		300	300
Single phase motor rating (230 V AC) kW		0.185	0.185
Breaking capacity DC1: 30/110/220 V A		6/0.2/0.12	6/0.2/0.12
Minimum switching load mW (V/mA)		500 (12/10)	500 (12/10)
Standard contact material		AgNi	AgNi

Coil specification

Nominal voltage (U_N)	V AC/DC	12 - 24 - 48 - 60 - (110...125) - (220...240)	(110...125)	-
	V AC	(230...240)*	-	(230...240)
	V DC	6 - 12 - 24 - 48 - 60 (non polarized)	-	-
Rated power AC/DC	VA (50 Hz)/W	See page 9	1/1	0.5/-
Operating range	AC/DC	(0.8...1.1) U_N	(94...138)V	-
	AC	(184...264)V	-	(184...264)V
	DC	(0.8...1.2) U_N	-	-
Holding voltage	AC/DC	0.6 U_N / 0.6 U_N	0.6 U_N / 0.6 U_N	
Must drop-out voltage	AC/DC	0.1 U_N / 0.05 U_N	44 V	72 V

Technical data

Mechanical life AC/DC	cycles	$10 \cdot 10^6$	$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$60 \cdot 10^3$	$60 \cdot 10^3$
Operate/release time	ms	5/6	5/6
Insulation between coil and contacts (1.2/50 μ s)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts V AC		1,000	1,000
Ambient temperature range ($U_N \leq 60$ V/>60V) °C		-40...+70/-40...+55	-/-40...+55
Protection category		IP 20	IP 20
Approvals relay (according to type)		RINA	

38 Series - Relay interface modules - Single output SSR

Features

Single output - solid state relay interface modules, 6.2 mm wide.

Ideal interface for PLC and electronic systems

- DC, AC or AC/DC input versions
- Supplied with integral coil indication and protection circuit
- Silent, high switching speed and long electrical life
- Instant ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

B

38.81 / 38.81.3
Screw terminal



38.91 / 38.91.3
Screwless terminal



38.81/38.91



- AC or DC output switching
- SSR relay - DC input voltage
- Screw terminal and screwless terminal
- 35 mm rail (EN 60715) mounting

38.81.3/38.91.3





- Leakage current suppression
- AC or DC output
- SSR relay - AC or AC/DC input voltage
- Screw terminal and screwless terminal
- 35 mm rail (EN 60715) mounting

For outline drawing see page 12

Output specification

Contact configuration

	1 NO (SPST-NO)			1 NO (SPST-NO)		
Rated current/Maximum peak current (10 ms) A	2/20	0.1/0.5	2/40	2/20	0.1/0.5	2/40
Rated voltage/Maximum blocking voltage V	24/33 DC	48/60 DC	240/- AC	24/33 DC	48/60 DC	240/- AC
Switching voltage range V	(1.5...24)DC	(1.5...48)DC	(12...275)AC	(1.5...24)DC	(1.5...48)DC	(12...275)AC
Repetitive peak off-state voltage V _{pk}	—	—	600	—	—	600
Minimum switching current mA	1	0.05	22	1	0.05	22
Max. "OFF-state" leakage current mA	0.001	0.001	1.5	0.001	0.001	1.5
Max. "ON-state" voltage drop V	0.12	1	1.6	0.12	1	1.6

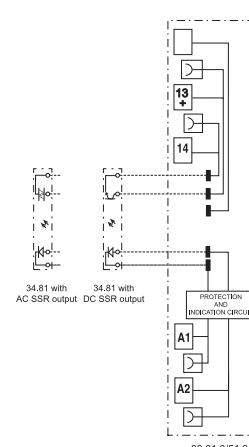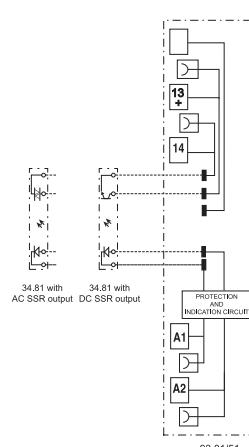

Input specification

V AC	—	230...240
Nominal voltage (U _N) V DC	6 - 24 - 60	—
	(110...125) - (220...240)	110...125

Operating range V DC	See page 10	See page 10
Control current mA	See page 10	See page 10

Release voltage V DC	See page 10	See page 10
----------------------	-------------	-------------

Technical data

Operate/release time: ON/OFF (DC input) ms	0.2/0.6	0.04/0.11	12/12	0.2/0.6	0.04/0.11	12/12
Dielectric strength between input/output V AC	2,500			2,500		
Ambient temperature range °C	-20...+55			-20...+55		
Environmental protection	IP20			IP20		
Approvals relay (according to type)						

38 Series - Timed interface modules - EMR & SSR

Features

Slim timed interface module, 6.2 mm wide.
 1 pole, 6 A - electromechanical relay
 1 output, 2 A DC or AC - solid state relay

- Electromechanical or solid state output
- Multi-functions timer
- AC/DC supply
- 4 time scales from 0.1s to 6h
- Instant ejection of relay using plastic retaining clip
- 6.2 mm wide, 35 mm rail (EN 60715) mounting

38.21
Screw terminal



For outline drawing see page 12

Contact specification

Contact configuration	1 CO (SPDT)	—	—
Rated current/Maximum peak current A	6/10	—	—
Rated voltage/Maximum switching voltage V AC	250/400	—	—
Rated load AC1 VA	1,500	—	—
Breaking capacity DC1: 30/110/220 V A	6/0.2/0.12	—	—
Minimum switching load mW (V/mA)	500 (12/10)	—	—
Standard contact material	AgNi	—	—

Output specification

		DC output (...9024)	AC output (...8240)
Output configuration	—	1 NO (SPST-NO)	1 NO (SPST-NO)
Rated current/Maximum peak current A	—	2/20	2/40
Rated voltage/Maximum blocking voltage V	—	(24/33)DC	(240/—)AC
Switching voltage range V	—	(1.5...24)DC	(12...275)AC
Repetitive peak off-state voltage V _{pk}	—	—	600
Minimum switching current mA	—	1	22
Max. "OFF-state" leakage current mA	—	0.001	1.5
Max. "ON-state" voltage drop V	—	0.12	1.6

Supply specification

Nominal voltage (U _N) V AC (50/60Hz)/DC	12 - 24	24
Rated power VA/W	0.5	0.5
Operating range AC	(0.8...1.1)U _N	(0.8...1.1)U _N
DC	(0.8...1.1)U _N	(0.8...1.1)U _N

Technical data

Specified time range	(0.1...3)s, (3...60)s, (1...20)min, (0.3...6)h	
Repeatability %	± 1	
Recovery time ms	≤ 50	
Setting accuracy-full range %	5%	
Ambient temperature °C	-40...+70	-20...+55
Protection category	IP 20	
Approvals relay (according to type)		

38.21



38.21...9024-8240



34.51

93.21

34.81 with
AC SSR output

34.81 with
DC SSR output

93.21

93.21

Features

Electromechanical relay interface modules,
14 mm wide.

38.01 and 38.11 - 1 Pole 16 A
38.52 and 38.62 - 2 Pole 8 A

B Ideal interface for PLC and electronic systems

- Sensitive DC coil or AC/DC coil versions
- Integral coil indication and protection circuit
- Instant ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

38.01/52
Screw terminal



38.11/62
Screwless terminal



38.01/38.11



- Screw terminal and screwless terminal
- 1 pole electromechanical relay
- 35 mm rail (EN 60715) mounting



38.52/38.62



- Screw terminal and screwless terminal
- 2 pole electromechanical relay
- 35 mm rail (EN 60715) mounting

For outline drawing see page 12

* For currents >10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).

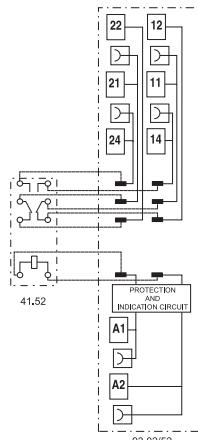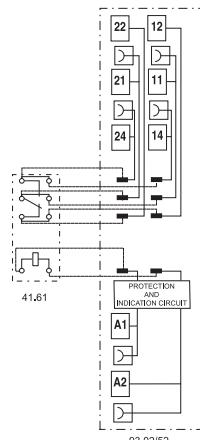

Contact specification

Contact configuration	1 CO (DPDT)	2 CO (DPDT)
Rated current/Maximum peak current A	16*/30	8/15
Rated voltage/Maximum switching voltage V AC	250/400	250/400
Rated load AC1 VA	4,000	2,000
Rated load AC15 (230 V AC) VA	750	400
Single phase motor rating (230 V AC) kW	0.5	0.3
Breaking capacity DC1: 30/110/220 V A	16/0.3/0.12	8/0.3/0.12
Minimum switching load mW (V/mA)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi

Coil specification

Nominal voltage (U_N)	V AC/DC	24 - 60 - (110...125) - (220...240)	24 - 60 - (110...125) - (220...240)
	V AC	230...240	230...240
	V DC	12 - 24 - 60	12 - 24 - 60
Rated power AC/DC	VA (50 Hz)/W	See page 9	See page 9
Operating range	AC/DC	0.8...1.1	0.8...1.1
	DC	(0.8...1.2) U_N	(0.8...1.2) U_N
Holding voltage	AC/DC	0.6 / 0.6 U_N	0.6 / 0.6 U_N
Must drop-out voltage	AC/DC	0.1 / 0.05 U_N	0.1 / 0.05 U_N

Technical data

Mechanical life AC/DC	cycles	10 · 10 ⁶	10 · 10 ⁶
Electrical life at rated load AC1	cycles	50 · 10 ³	60 · 10 ³
Operate/release time	ms	8 / 10	8 / 10
Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)	6 (8 mm)
Dielectric strength between open contacts V AC		1,000	1,000
Ambient temperature range ($U_N \leq 60$ V / >60 V)	°C	-40...+70 / -40...+55	-40...+70 / -40...+55
Protection category		IP 20	IP 20
Approvals relay (according to type)		RINA	

Features

Single output - solid state relay interface modules, 14 mm wide.

Ideal interface for PLC and electronic systems

- DC input versions
- Supplied with integral coil indication and protection circuit
- Silent, high switching speed and long electrical life
- Instant ejection of relay using plastic retaining clip
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

38.31
Screw terminal




38.41
Screwless terminal



38.31/38.41



- Screw terminal and screwless terminal
- AC or DC output switching
- SSR relay - DC input voltage
- 35 mm rail (EN 60715) mounting

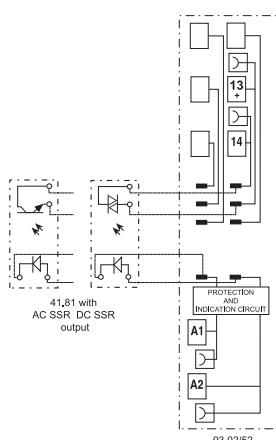

For outline drawing see page 12

Output specification

Contact configuration	1 NO (SPST-NO)	1 NO (SPST-NO)
Rated current/Maximum peak current (10 ms)	5/40	3/40
Rated voltage/Maximum blocking voltage	(24/35)DC	(240/-)AC
Switching voltage range	(1.5...24)DC	(12...275)AC
Repetitive peak off-state voltage	V _{pk}	—
Minimum switching current	mA	1
Max. "OFF-state" leakage current	mA	0.01
Max. "ON-state" voltage drop	V	0.3
1.1		

Input specification

Nominal voltage (U _N)	V AC/DC	24
	V DC	12 - 24
Operating range	V DC	See page 10
Control current	mA	See page 10
Release voltage	V DC	See page 10

Technical data


Operate/release time: ON/OFF (DC input)	ms	0.05/0.25	12/12
Dielectric strength between input/output	V AC	2,500	
Ambient temperature range	°C	-20...+55	
Environmental protection		IP20	
Approvals relay (according to type)		RINA	

38 Series - Relay interface modules - Ordering information

Ordering information

Electromechanical relay - 1 or 2 Pole

Example: 38 series screw terminal relay interface module, 1 CO (SPDT), sensitive 12 V DC coil.

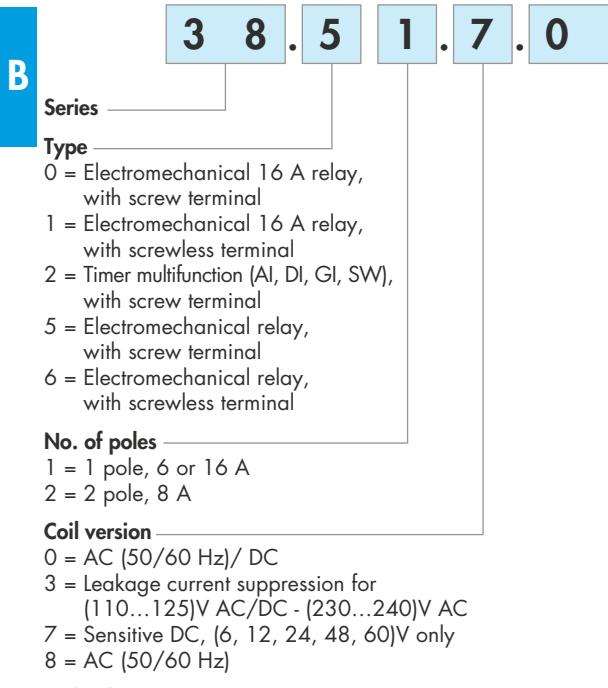

A B C D

0 1 2 . 0 0 5 0

D: Special versions
0 = Standard

C: Options
5 = Standard DC
6 = Standard AC or AC/DC

B: Contact circuit
0 = CO (nPDT)

A: Contact material
0 = AgNi Standard
4 = AgSnO₂
5 = AgNi + Au

Selecting features and options: only combinations in the same row are possible.

Type	Coil version	A	B	C	D
38.01/11	7	0 - 4	0	5	0
38.01/11	0 - 8	0 - 4	0	6	0
38.51/61	7	0 - 4 - 5	0	5	0
38.51/61	0 - 3 - 8	0 - 4 - 5	0	6	0
38.52/62	7	0 - 5	0	5	0
38.52/62	0 - 8	0 - 5	0	6	0
38.21	0	0	0	6	0

Ordering information**Solid state relay - Single output - 6.2 & 14 mm wide**

Example: 38 series screw terminal SSR relay interface module, 6.2 mm wide, 2 A output, 24 V DC input.

3	8	.	8	1	.	7	.	0	2	4	.	9	0	2	4			
Series																		
Type									Output version									
21 = Timer SSR 6.2mm wide, with screw terminal									9024 = 2 A - 24 V DC (38.21, 38.81 & 38.91)									
31 = SSR 14mm wide, with screw terminal									9024 = 5 A - 24 V DC (38.31 & 38.41)									
41 = SSR 14mm wide, with screwless terminal									7048 = 0.1 A - 48 V DC (38.81 & 38.91)									
81 = SSR 6.2mm wide, with screw terminal									8240 = 2 A - 240 V AC (38.21, 38.81 & 38.91)									
91 = SSR 6.2mm wide, with screwless terminal									8240 = 3 A - 240 V AC (38.31 & 38.41)									
Input version																		
0 = AC/DC																		
3 = Leakage current suppression for (110...125)V AC/DC and (230...240)V AC SSR only																		
7 = DC, (6, 24, 60)V SSR only																		
Input voltage																		
See input specifications																		

Selecting features and options: only combinations in the same row are possible.

Type	Input version	Output version
38.81/91	7	9024 - 7048 - 8240
38.81/91	0 - 3	9024 - 7048 - 8240
38.31/41	0 - 7	9024 - 8240
38.21	0	9024 - 8240

38 Series - Relay interface modules - Technical data

Technical data - 1 & 2 Pole Electromechanical Relays

Insulation

Insulation according to EN 61810-1	insulation rated voltage V	250	400
	rated impulse withstand voltage kV	4	4
	pollution degree	3	2
	overvoltage category	III	III

B

Insulation between coil and contacts (1.2/50 µs)	kV	6 (8 mm)
Dielectric strength between open contacts	V AC	1,000

Conducted disturbance immunity	
Burst (5...50)ns, 5 kHz, on A1 - A2	EN 61000-4-4
Surge (1.2/50 µs) on A1 - A2 (differential mode)	EN 61000-4-5


Other data	
Bounce time: NO/NC	ms 1/6
Vibration resistance (10...55)Hz: NO/NC	g 10/5
Power lost to the environment	W without contact current 0.2 (12 V) - 0.9 (240 V)
	W with rated current 0.5 (12 V) - 1.5 (240 V)
	38.21 / 38.51
	38.61

Terminals	
Wire strip length	mm 10
 Screw torque	Nm 0.5
Max. wire size	solid cable 1x2.5/2x1.5 stranded cable 1x2.5
	mm ² 1x2.5/2x1.5 AWG 1x14/2x16
	38.01 / 38.52
Wire strip length	mm 10
 Screw torque	Nm 0.5
Max. wire size	solid cable 1x2.5/2x1.5 stranded cable 1x2.5
	mm ² 1x2.5/2x1.5 AWG 1x14/2x16
	38.11 / 38.62
	1x14
	1x14


Terminals	
Wire strip length	mm 10
 Screw torque	Nm 0.5
Max. wire size	solid cable 1x2.5/2x1.5 stranded cable 1x2.5
	mm ² 1x2.5/2x1.5 AWG 1x14/2x16
	38.01 / 38.52
Wire strip length	mm 10
 Screw torque	Nm 0.5
Max. wire size	solid cable 1x2.5/2x1.5 stranded cable 1x2.5
	mm ² 1x2.5/2x1.5 AWG 1x14/2x16
	38.11 / 38.62
	1x14
	1x14

Contact specification - 1 & 2 Pole Electromagnetic Relays


F 38 - Electrical life (AC) v contact current, 1 Pole 6 A

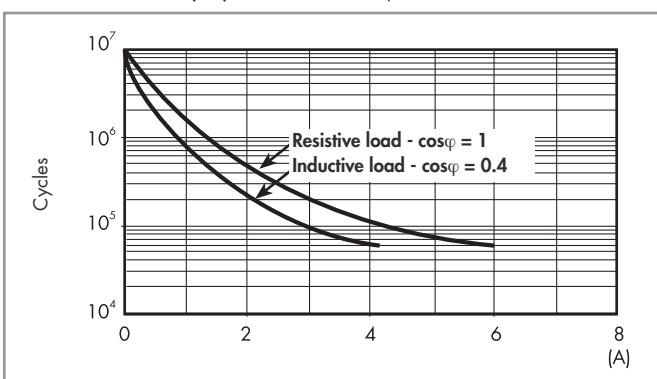

H 38 - Maximum DC1 breaking capacity, 1 Pole 6 A

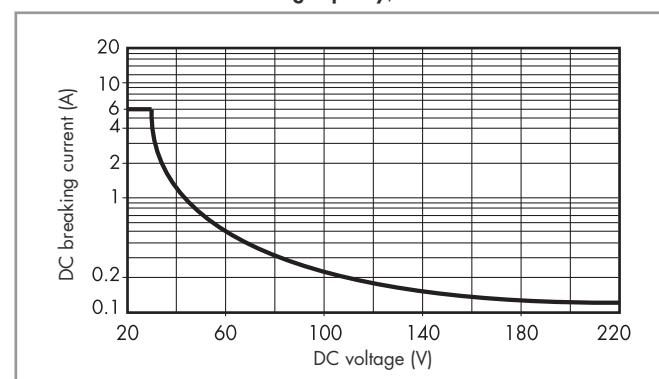


F 38 - Electrical life (AC) v contact current, 1 Pole 16 A and 2 Pole 8 A

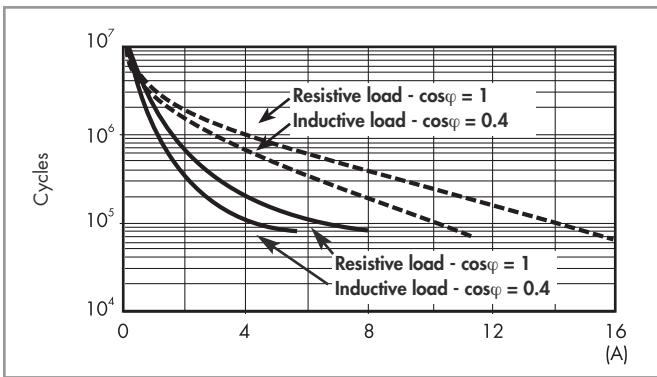

— : 2 Pole 8 A
- - - : 1 Pole 16 A

H 38 - Maximum DC1 breaking capacity, 1 Pole 16 A and 2 Pole 8 A

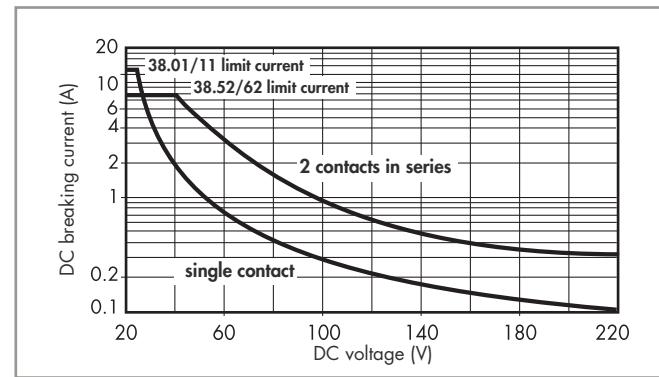

- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 60 \cdot 10^3$ (1 Pole) or $\geq 80 \cdot 10^3$ (2 Pole) can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load.
Note: the release time for the load will be increased.

Coil specifications - 1 Pole 6 A Electromechanical Relay**Coil data sensitive DC, 1 Pole**

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N W
		U _{min} V	U _{max} V		
6	7.006	4.8	7.2	35	0.2
12	7.012	9.6	14.4	15.2	0.2
24	7.024	19.2	28.8	10.4	0.3
48	7.048	38.4	57.6	6.3	0.3
60	7.060	48	72	7	0.4

Coil data AC/DC, 1 Pole

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N VA/W
		U _{min} V	U _{max} V		
12	0.012	9.6	13.2	16	0.2/0.2
24	0.024	19.2	26.4	12	0.3/0.2
48	0.048	38.4	52.8	6.9	0.3/0.3
60	0.060	48	66	7	0.5/0.5
110...125	0.125	88	138	5(*)	0.6/0.6(*)
220...240	0.240	176	264	4(*)	1/0.9(*)

(*) Rated coil consumption and power consumption values relate to U_N = 125 and 240 V.

Coil data AC, 1 Pole (indicated for max ambient temperature +70°C)

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N VA/W
		U _{min} V	U _{max} V		
(230...240) AC	8.240	184	264	3	0.7/0.3

Coil data, leakage current suppression types, 1 Pole

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N VA/W
		U _{min} V	U _{max} V		
(110...125) AC/DC	3.125	94	138	8(*)	1/1(*)
(230...240) AC	3.240	184	264	7(*)	1.7/0.5(*)

(*) Rated coil consumption and power consumption values relate to U_N = 125 and 240 V.

The 38 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC and (230...240)V AC.

This problem can occur, for example, when connecting the interface modules to PLC's with triac outputs or when connecting via relatively long cables.

Coil specifications - 1 Pole 16 A and 2 Pole 8 A Electromechanical Relay**Coil data sensitive DC, 1 Pole 16 A and 2 Pole 8 A**

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N W
		U _{min} V	U _{max} V		
12	7.012	9.6	14.4	41	0.5
24	7.024	19.2	28.8	19.5	0.5
60	7.060	48	72	8	0.5

Coil data AC/DC, 1 Pole 16 A and 2 Pole 8 A


Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N VA/W
		U _{min} V	U _{max} V		
24	0.024	19.2	26.4	20	0.5/0.5
60	0.060	48	66	7.1	0.5/0.5
110...125	0.125	88	138	4.6	0.6/0.6
220...240	0.240	184	264	3.8	0.9/0.9

Coil data AC, 1 Pole 16 A and 2 Pole 8 A

Nominal voltage U _N V	Coil code	Operating range		Rated coil consumption I at U _N mA	Power consumption P at U _N VA/W
		U _{min} V	U _{max} V		
230...240	8.230	184	264	5.3	1.2/0.6

Coil specification - 1 & 2 Pole Electromagnetic Relays**R 38 - DC coil operating range v ambient temperature**

1 Pole and 2 Pole

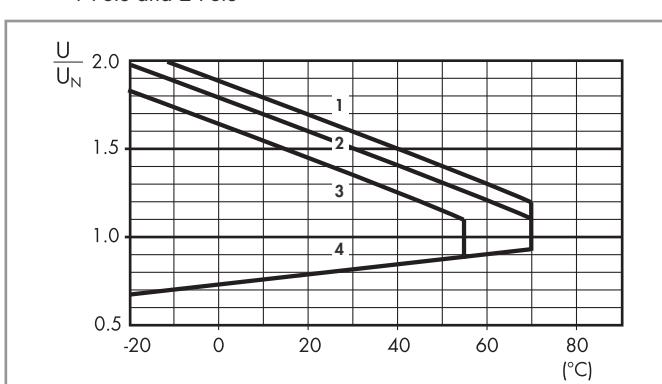

1 - Max. permitted coil voltage at nominal load (DC coil).

2 - Max. permitted coil voltage at nominal load (AC/DC coils U ≤ 60 V).

3 - Max. permitted coil voltage at nominal load (AC/DC coils U > 60 V).

4 - Min pick-up voltage with coil at ambient temperature.

38 Series - Relay interface modules - Technical data

Technical data - Solid State Relays

Other data		38.81/38.91		38.31/38.41	
Power lost to the environment	without output current	W	0.25 (24 V DC)	0.5	
	with rated current	W	0.4	2.2 (DC output) / 3 (AC output)	
Terminals		38.81		38.91	
Wire strip length	mm	10		10	
⊖ Screw torque	Nm	0.5		—	
Max. wire size	mm ²	solid cable	stranded cable	solid cable	stranded cable
	AWG	1x2.5 / 2x1.5	1x2.5 / 2x1.5	1x2.5	1x2.5
Wire strip length		38.31		38.41	
mm	10		10		
⊖ Screw torque	Nm	0.5		—	
Max. wire size	mm ²	solid cable	stranded cable	solid cable	stranded cable
	AWG	1x2.5 / 2x1.5	1x2.5 / 2x1.5	1x2.5	1x2.5
Wire strip length		AWG		1x14 / 2x16	
mm	10		1x14 / 2x16		1x14
⊖ Screw torque	Nm	0.5		—	
Max. wire size	mm ²	solid cable	stranded cable	solid cable	stranded cable
	AWG	1x14 / 2x16	1x14 / 2x16	1x14	1x14

Input specifications - Solid State Relays type 38.81 and 38.91 - 6.2 mm wide

Input data DC

Nominal voltage U _N	Supply code	Operating range		Release voltage U	Rated coil consumption I at U _N	Power consumption P
		U _{min}	U _{max}			
V	7.006	V	V	V	mA	W
6	7.024	5	7.2	2.4	7	0.2
24	7.024	16.8	30	10	10.5	0.3
60	7.060	35.6	72	20	6.5	0.4

Input data AC/DC

Nominal voltage U _N	Supply code	Operating range		Release voltage U	Rated coil consumption I at U _N	Power consumption P
		U _{min}	U _{max}			
V	0.125	V	V	V	mA	VA/W
110...125	0.125	88	138	22	5.5*	0.7/0.7
220...240	0.240	184	264	44	3.5*	1/0.9

(*) Rated coil consumption and power consumption values relate to U_N = 125 and 240 V.

Input data - Leakage current suppression types

Nominal voltage U _N	Supply code	Operating range		Release voltage U	Rated coil consumption I at U _N	Power consumption P at U _N
		U _{min}	U _{max}			
V	3.125	V	V	44	8(*)	1/1(*)
110...125 AC/DC	3.125	94	138	44	8(*)	1/1(*)
230...240 AC	3.240	184	264	72	6.5(*)	1.6/0.6(*)

(*) Rated coil consumption and power consumption values relate to U_N = 125 and 240 V.

The 38 Series interface modules (supply version 3) have built-in leakage current suppression to address industry concerns of the contacts not dropping-out when there is residual current in the circuit; at (110...125)V AC and (230...240)V AC.

This problem can occur, for example, when connecting the interface modules to PLCs with triac outputs or when connecting via relatively long cables.

Input specification - Solid State Relay types 38.31 and 38.41 - 14 mm wide

Input data DC

Nominal voltage U _N	Supply code	Operating range		Release voltage U	Rated coil consumption I at U _N	Power consumption P
		U _{min}	U _{max}			
V	7.012	V	V	V	mA	W
12	7.012	9.6	18	5	9	0.2
24	7.024	16.8	30	5	12	0.3

Input data AC/DC

Nominal voltage U _N	Supply code	Operating range		Release voltage U	Rated coil consumption I at U _N	Power consumption P
		U _{min}	U _{max}			
V	0.024	V	V	V	mA	W
24	0.024	16.8	30	9	16.5	0.3


38 Series - Timed interface modules

Additional technical data - Timed Interface Module

EMC specifications

Type of test		Reference standard	
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV
	air discharge	EN 61000-4-2	8 kV
Radio-frequency electromagnetic field (80 ÷ 1,000 MHz)		EN 61000-4-3	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	4 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV
	differential mode	EN 61000-4-5	4 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V
Radiated and conducted emission		EN 55022	class B
Other data		EMR	SSR
Power lost to the environment	without contact current W	0.1	0.1
	with rated current W	0.6	0.5
Terminals		38.21	
Wire strip length	mm	10	
Screw torque	Nm	0.5	
Max. wire size	solid cable		stranded cable
	mm ²	1x2.5 / 2x1.5	1x2.5 / 2x1.5
	AWG	1x14 / 2x16	1x14 / 2x16

Times scales

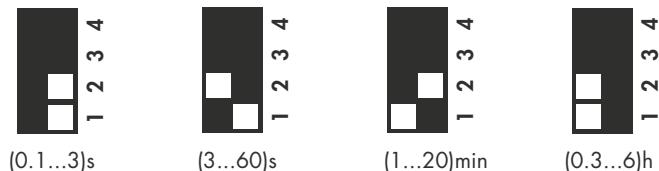



Functions

LED	Supply voltage	NO contact/output
—	OFF	Open
—	ON	Open (time in progress)
— (red bar)	ON	Closed

Wiring diagram

U = Supply voltage

— = Output contact



(A) On-delay.

Apply power to timer.
Output contacts transfer after preset time has elapsed.
Reset occurs when power is removed.



(D) Interval.

Apply power to timer.
Output contacts transfer immediately.
After the preset time has elapsed, contacts reset.



(G) Pulse delayed.

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs after a fixed time of 0.5s.



(SW) Symmetrical flasher (starting pulse on).


Apply power to timer.
Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied.
The ratio is 1:1 (time on = time off).

38 Series - Relay interface modules - Dimensional data


Outline drawings

38.21
38.51 / 38.51.3
38.81 / 38.81.3
Screw terminal

B

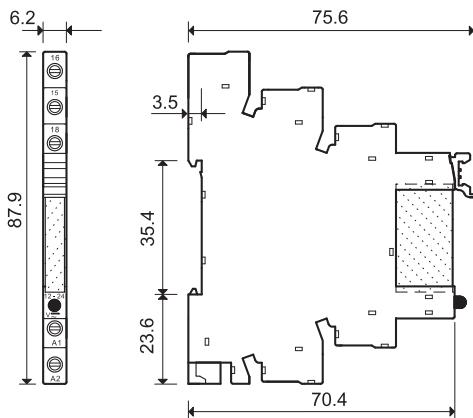



38.01
38.31
38.52
Screw terminal

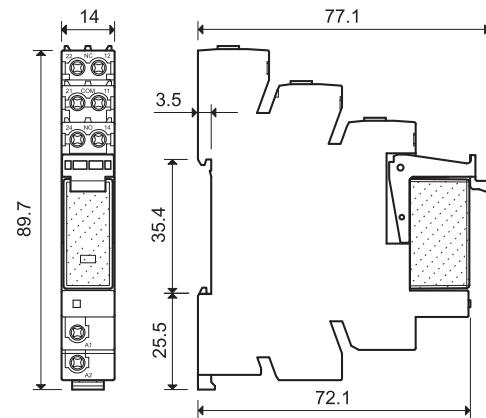

38.61 / 38.61.3
38.91 / 38.91.3
Screwless terminal



38.11
38.41
38.62
Screwless terminal

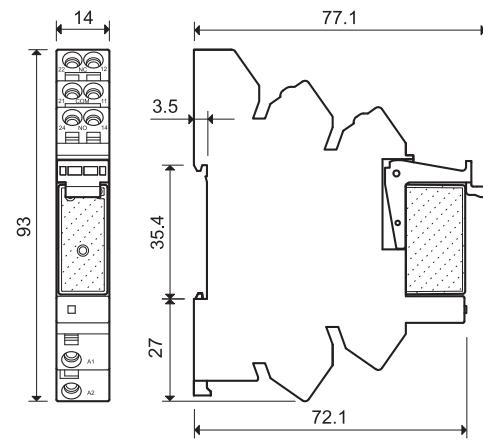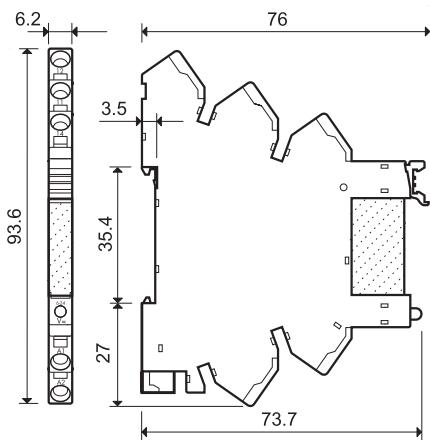

Electromechanical Relay & Socket Combinations


93.01

93.51


93.02

93.52

Approvals
(according to type):



Certain relay/socket combinations



Screw terminal - 1 Pole relay 6 A

Interface Module Code	Coil voltage	Relay	Socket
38.51.0.012.0060	12 V AC/DC	34.51.7.012.0010	93.01.0.024
38.51.0.024.0060	24 V AC/DC	34.51.7.024.0010	93.01.0.024
38.51.0.048.0060	48 V AC/DC	34.51.7.048.0010	93.01.0.060
38.51.0.060.0060	60 V AC/DC	34.51.7.060.0010	93.01.0.060
38.51.0.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.01.0.125
38.51.0.240.0060	(220...240)V AC/DC	34.51.7.060.0010	93.01.0.240
38.51.3.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.01.3.125
38.51.3.240.0060	(230...240)V AC	34.51.7.060.0010	93.01.3.240
38.51.7.006.0050	6 V DC	34.51.7.005.0010	93.01.7.024
38.51.7.012.0050	12 V DC	34.51.7.012.0010	93.01.7.024
38.51.7.024.0050	24 V DC	34.51.7.024.0010	93.01.7.024
38.51.7.048.0050	48 V DC	34.51.7.048.0010	93.01.7.060
38.51.7.060.0050	60 V DC	34.51.7.060.0010	93.01.7.060
38.51.8.240.0060	(230...240)V AC	34.51.7.060.0010	93.01.8.240

Screwless terminal - 1 Pole relay 6 A

Interface Module Code	Coil voltage	Relay	Socket
38.61.0.012.0060	12 V AC/DC	34.51.7.012.0010	93.51.0.024
38.61.0.024.0060	24 V AC/DC	34.51.7.024.0010	93.51.0.024
38.61.0.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.51.0.125
38.61.0.240.0060	(220...240)V AC/DC	34.51.7.060.0010	93.51.0.240
38.61.3.125.0060	(110...125)V AC/DC	34.51.7.060.0010	93.51.3.125
38.61.3.240.0060	(230...240)V AC	34.51.7.060.0010	93.51.3.240
38.61.7.012.0050	12 V DC	34.51.7.012.0010	93.51.7.024
38.61.7.024.0050	24 V DC	34.51.7.024.0010	93.51.7.024
38.61.8.240.0060	(230...240)V AC	34.51.7.060.0010	93.51.8.240

Screw terminal - 1 Pole relay 16 A

Interface Module Code	Coil voltage	Relay	Socket
38.01.7.012.0050	12 V DC	41.61.9.012.0010	93.02.7.024
38.01.7.024.0050	24 V DC	41.61.9.024.0010	93.02.7.024
38.01.7.060.0050	60 V DC	41.61.9.060.0010	93.02.7.060
38.01.0.024.0060	24 V AC/DC	41.61.9.024.0010	93.02.0.024
38.01.0.060.0060	60 V AC/DC	41.61.9.060.0010	93.02.0.060
38.01.0.125.0060	125 V AC/DC	41.61.9.110.0010	93.02.0.125
38.01.0.240.0060	240 V AC/DC	41.61.9.110.0010	93.02.0.240
38.01.8.230.0060	230 V AC	41.61.9.110.0010	93.02.8.230

Screwless terminal - 1 Pole relay 16 A

Interface Module Code	Coil voltage	Relay	Socket
38.11.7.012.0050	12 V DC	41.61.9.012.0010	93.52.7.024
38.11.7.024.0050	24 V DC	41.61.9.024.0010	93.52.7.024
38.11.7.060.0050	60 V DC	41.61.9.060.0010	93.52.7.060
38.11.0.024.0060	24 V AC/DC	41.61.9.024.0010	93.52.0.024
38.11.0.060.0060	60 V AC/DC	41.61.9.060.0010	93.52.0.060
38.11.0.125.0060	125 V AC/DC	41.61.9.110.0010	93.52.0.125
38.11.0.240.0060	240 V AC/DC	41.61.9.110.0010	93.52.0.240
38.11.8.230.0060	230 V AC	41.61.9.110.0010	93.52.8.230

Screw terminal - 2 Pole relay 8 A


Interface Module Code	Coil voltage	Relay	Socket
38.52.0.024.0060	24 V AC/DC	41.52.9.024.0010	93.02.0.024
38.52.0.060.0060	60 V AC/DC	41.52.9.060.0010	93.02.0.060
38.52.0.125.0060	(110...125)V AC/DC	41.52.9.110.0010	93.02.0.125
38.52.0.240.0060	(220...240)V AC/DC	41.52.9.110.0010	93.02.0.240
38.52.7.012.0050	12 V DC	41.52.9.012.0010	93.02.7.024
38.52.7.024.0050	24 V DC	41.52.9.024.0010	93.02.7.024
38.52.7.060.0050	60 V DC	41.52.9.060.0010	93.02.7.060
38.52.8.230.0060	(230...240)V AC	41.52.9.110.0010	93.02.8.230

Screwless terminal - 2 Pole relay 8 A


Interface Module Code	Coil voltage	Relay	Socket
38.62.0.024.0060	24 V AC/DC	41.52.9.024.0010	93.52.0.024
38.62.0.060.0060	60 V AC/DC	41.52.9.060.0010	93.52.0.060
38.62.0.125.0060	(110...125)V AC/DC	41.52.9.110.0010	93.52.0.125
38.62.0.240.0060	(220...240)V AC/DC	41.52.9.110.0010	93.52.0.240
38.62.7.012.0050	12 V DC	41.52.9.012.0010	93.52.7.024
38.62.7.024.0050	24 V DC	41.52.9.024.0010	93.52.7.024
38.62.7.060.0050	60 V DC	41.52.9.060.0010	93.52.7.060
38.62.8.230.0060	(230...240)V AC	41.52.9.110.0010	93.52.8.230

93 Series - Sockets and accessories for 38 series

Solid State Relay & Socket Combinations - 6.2 mm wide



93.01



93.51


Approvals
(according to type):

cUL us Certain relay/socket combinations

.9024

.7048

.8240



Solid State Relay & Socket Combinations - 14 mm wide



93.52

Approvals
(according to type):

SSR / EMR & Timer Socket Combinations



93.21

Approvals
(according to type):

Screw terminal			
Interface Module Code	Input voltage	Relay	Socket
38.21.0.012.0060	12 V AC/DC	34.51.7.012.0010	93.21.0.024
38.21.0.024.0060	24 V AC/DC	34.51.7.024.0010	93.21.0.024
38.21.0.024.xxxx	24 V AC/DC	34.81.7.024.xxxx	93.21.0.024

93 Series - Sockets and accessories for 38 series


Accessories



093.20

Approvals
(according to type):


20-way jumper link for 38.21/51/61/81/91	093.20 (blue)	093.20.0 (black)	093.20.1 (red)
Rated values	36 A - 250 V		

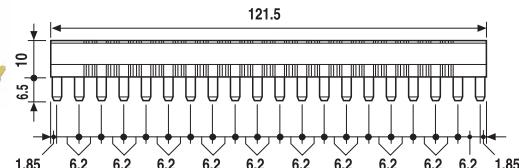

093.08

Approvals
(according to type):

8-way jumper link for 38.01/11/31/41/52/62	093.08 (blue)	093.08.0 (black)	093.08.1 (red)
Rated values	10 A - 250 V		

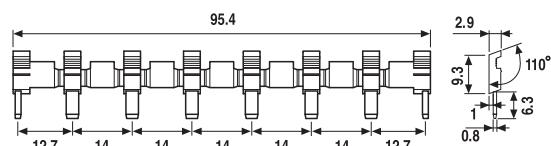


093.01

Plastic separator	093.01
--------------------------	--------

Thickness 2 mm, required at the start and the end of a group of interfaces.

Can be used for visual separation group, must be used for:

- protective separation of different voltages of neighbouring PLC interfaces according to VDE 0106-101
- protection of cut jumper links



093.64

Sheet of marker tags for 38.21/51/61/81/91, plastic, 64 tags, 6x10 mm	093.64
--	--------



060.72

Sheet of marker tags for 38.01/11/31/41/52/62, plastic, 72 tags, 6x12 mm	060.72
---	--------

