

SPECIFICATION

A: MATERIAL:

1. HOUSING: NYLON 66 FLAMMABILITY, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ NORTH AMERICA
10A 250V~ EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2,000V FOR 1 MINUTE

C: APPROVALS:






UL, CUL, ENEC, & CCC

D: DIAGRAM:

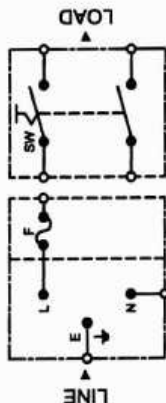

E: ORDERING INFORMATION:

P/N	PANEL THICKNESS	SWITCH'S TERMINAL
0717-1S-PQ08-C	0.8 mm	
0717-1S-PQ10-C	1.0 mm	
0717-1S-PQ12-C	1.2 mm	
0717-1S-PQ14-C	1.4 mm	

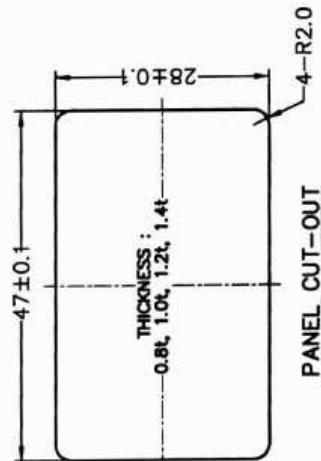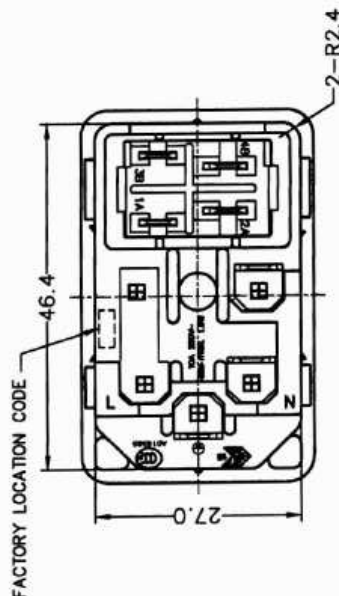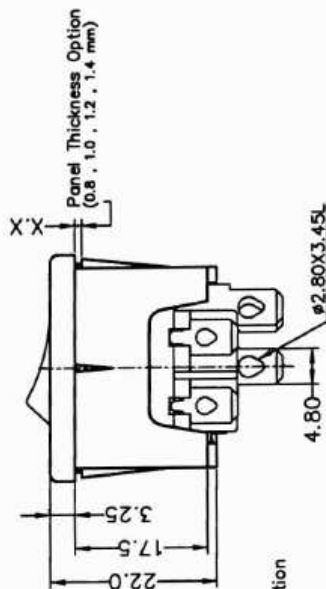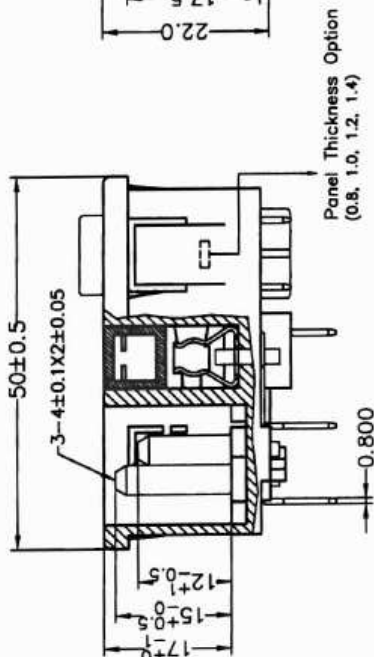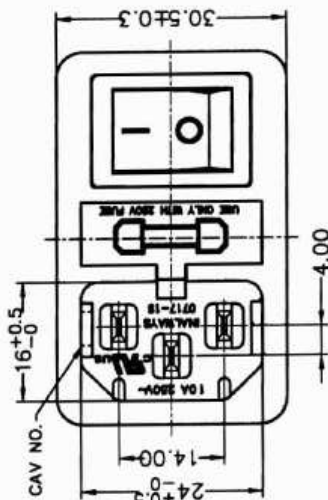

PANEL CUT-OUT

REV	DATE	DOCUMENT	DESCRIPTION
H			
G			
F	2014.05.05	DGR14xxx	CHANGE SAFETY MARK
E	2012.11.27	DGR12027	CHANGE SAFETY MARK
D	2011.09.09	DGR11019	SWITCH CHANGE (MR210-MR216)

PART NO.:	0717-1S-PQXX-C	NAME:	AC INLET 3P-FUSE HOLDER + SWITCH (SNAP-IN)
MATERIAL:	SEE ABOVE	SPEC.:	IEC 60320-1, C14 IEC 60127-6
TOLERANCE UNLESS OTHERWISE MARKED	ANGULAR: ± 3°	APPROVED:	DESIGNER NOTE
DIMENSION:	0.00 : ±0.1 0.00 : ±0.2 0.0 : ±0.3	DATE:	2014.05.05
UNIT	mm	SCALE	1 : 1
SHEET	1 of 1	REV	4
		FILE NO.	S717-0015