
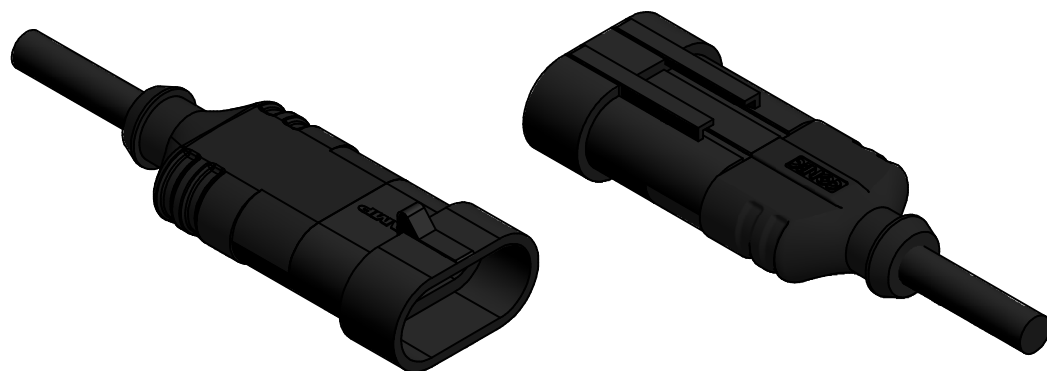
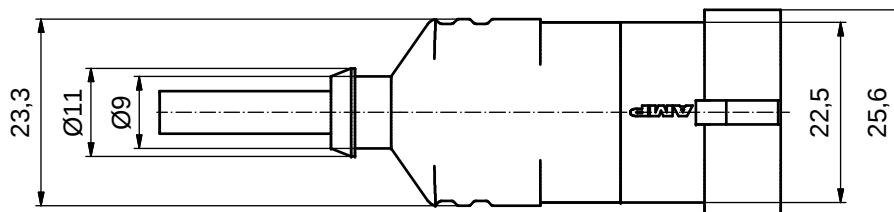
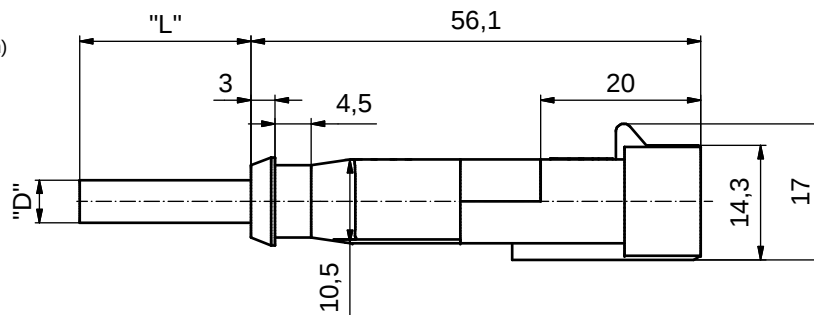


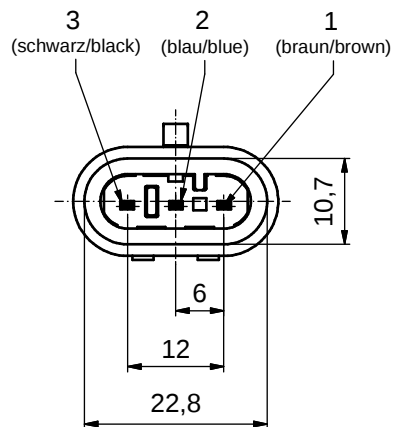

RoHS compliant

Technische Daten:

Bemessungsspannung:	max. 24 V DC
Strombelastbarkeit:	8 A bei 40°C
Schutzart:	IP 67, im gesteckten Zustand
Umgebungstemperatur Stecker:	-40°C ... +125°C
Umgebungstemperatur Leitung:	fest: -40°C ... +80°C bewegt: -25°C ... +80°C
Anschlussquerschnitt:	0,75mm ²
Gehäuse:	Superseal 1.5 Cap 282105-1, schwarz

Werkstoffe:

Kontakt:	CuZn
Kontaktoberfläche:	verzinkt
Kontaktträger:	PA 6.6 GF
Umspritzung:	TPU, UL94, schwarz
Dichtung:	Silikon

Technical specification:

Rated voltage:	max. 24 V DC
Current rating:	8 A at 40°C
Degree of protection:	IP 67, in mated condition
Temperature range connector:	-40°C ... +125°C
Temperature range wire:	fixed: -40°C ... +80°C moved: -25°C ... +80°C
Wire cross section:	0,75mm ²
Housing:	Superseal 1.5 Cap 282105-1, black

Materials:

Contact:	CuZn
Contact plating:	tin plated
Contact carrier:	PA 6.6 GF
Overmolding:	TPU, UL94, black
Sealing:	Silicone

Kontaktbelegung / Schematic diagram

Braun / Brown	1
Blau / Blue	2
Schwarz / Black	3

D = siehe Datenblatt Kabel
D = see data sheet cable

Art.Nr.:	Beschreibung / Description	Kabellänge / cable length "L"	Kabel / cable
55-00474	VSS1.5-3P-A/K1/0.75/2m	2m	PUR, schwarz / black, 3x 0,75mm ² , Kabel / Cable: 781-K1730G
55-00475	VSS1.5-3P-A/K1/0.75/5m	5m	
55-00476	VSS1.5-3P-A/K1/0.75/10m	10m	
55-XXXXX	VSS1.5-3P-A/K1/0.75/...m	...m	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	Kabelltoleranz / Cable tolerance: L ≤ 4m: L + 40mm L > 4m: L + 1%		tolerance ISO 2768-m		scale: material: siehe techn.Daten / see notes
	date	name	drawn	20.08.14	A.Bludau
	appd.	15.09.14	Koch		
	norm				
a	Origin				
	rev.	description	date	name	
				title: VSS 1.5 - 3pos Cap Valve Connector SuperSeal VSS 1.5 - 3pol Ventilstecker	
				dwg no: 55K1A057	
				part no: see table / siehe Tabelle	
				DIN-A3 sh: 1	