

1

2

3

4

5

Specifications:

Current rating:3 Amps

Dielectric Withstanding:AC 500V

Operating Temperature:-25°C ~ +105°C

Contact resistance:20mohm max.

Insulation resistance:1,000Mohm min.

Materials:

Insulator:Polyester(UL94V-0)

Contact material:Brass

Plating:Gold flash

HOW TO ORDER




2211DI-XXG-1900A

G:GOLD , T:TIN PLATED

NO. OF CONTACTS

DOUBLE INSULATOR

SERIES NUMBER

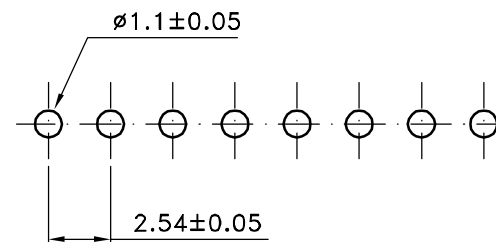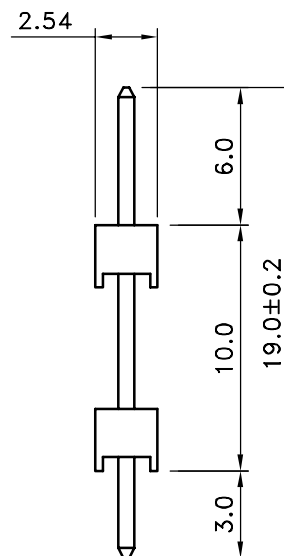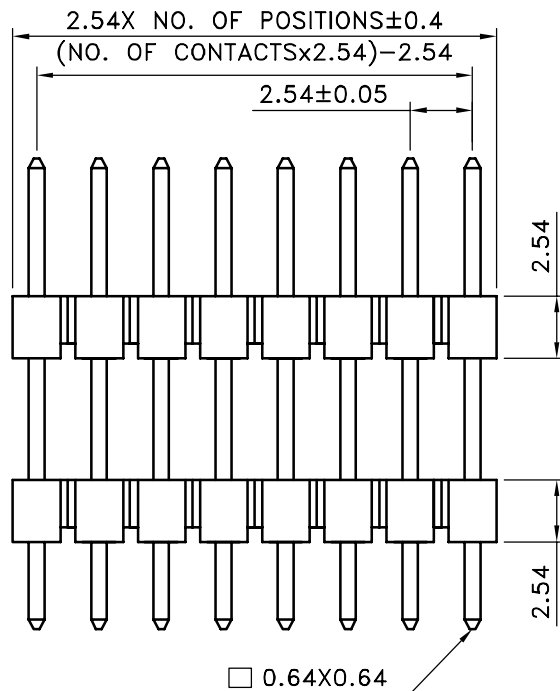

P.C.B. LAYOUT

A

B

C

D

E

D

C

B

A

REV

DATE

FILE

BY

DRAWN:

Jerry Chen

CHECKED:

Jeremy Liu

APPROVAL:

Mike Wu

GENERAL TOLERANCE:


.X = ± 0.2 .XX = ± 0.15

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

**繼德工業股份有限公司**
Neltron Industrial Co., Ltd.

DESCRIPTION:

2.54MM PIN HEADER DUAL
INSULATOR

PART NO:

2211DI-XXG-1900A

SIZE

A4