

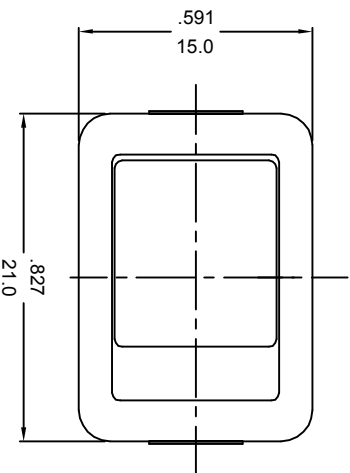



ROCKER SWITCH MODEL:MR SERIES
RATING:12(4)A 125/250V~ (CJRus/ENEC15)
10(4)A 250V~T125/55(CQC)
DIELECTRIC WITHSTAND VOLTAGE:1500VAC FOR 1 MINUTE
INSULATION RESISTANCE:DC 500V 100MΩ (MIN)
CONTACT RESISTANCE: 20mΩ INITIAL (MAX)

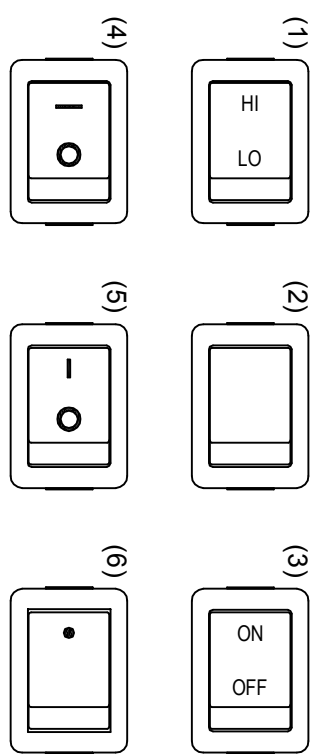

X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	19.2 ^{+0.1} ₀ mm	12.9 ^{+0.15} ₀ mm
1.25~2mm	19.4 ^{+0.1} ₀ mm	12.9 ^{+0.15} ₀ mm
2~3mm	19.8 ^{+0.1} ₀ mm	12.9 ^{+0.15} ₀ mm

PANEL CUTOUT DIMENSION TABLE

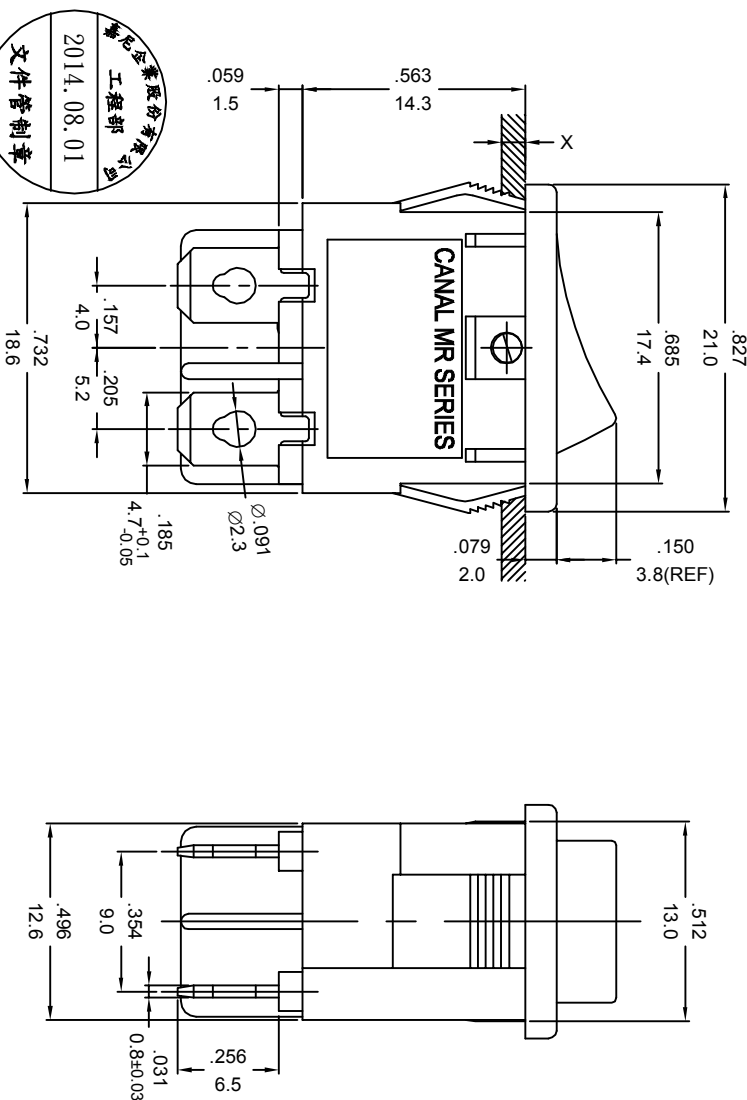

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	ANGLE 1/2°	SCALE	UNIT	PART NAME	MR SPEC DRAWING	DWG NO
4			DRAWN BY 趙俊鵬	DESIGNED BY 蔡劍	2/1	mm			
3			CHECKED BY 蔡劍	APPROVED BY 蔡劍					
2	修正品名，重新出圖	向家							
1	2013.06.03	趙俊鵬			2013.06.03		MR-211C**-N**B-13NC		S5298B