




嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.

RATING:(1) 16A 125/250VAC (UL/CUL) $\triangle 3$

(3) 16(4)A 250V~T125/55 (VDE/ENEC10/CQC)

INSULATION RESISTANCE: 500VDC 100M Ω (MIN)

CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)

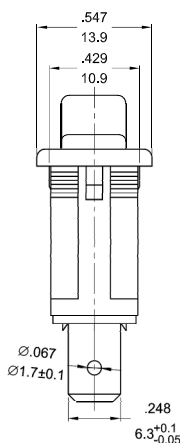

X=panel thickness	Dim.Y	Dim.Z
0.75 ~ 1.25 mm	30.0 $^{+0.1}_{-0}$	11.0 $^{+0.1}_{-0}$
1.25 ~ 2 mm	30.2 $^{+0.1}_{-0}$	11.0 $^{+0.1}_{-0}$
2 ~ 3 mm	30.5 $^{+0.1}_{-0}$	11.0 $^{+0.1}_{-0}$

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

[illegible]