





APPROVALS:       (submitted)



PART NO.:15EGTK-3.5

- Pluggable Terminal Block,
- Nominal Current(UL): 8A
- Rated Voltage(UL): 300V
- Number of Positions: 2P-24P
- Standard Color: Green
- Contact Surface: Phosphor Bronze
- Connection Method: Screw Connection

DRAWINGS:

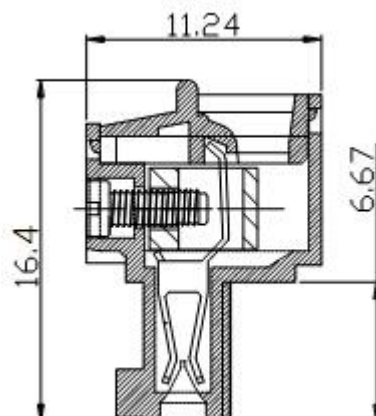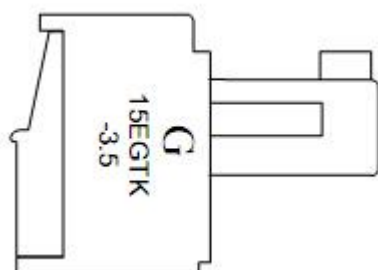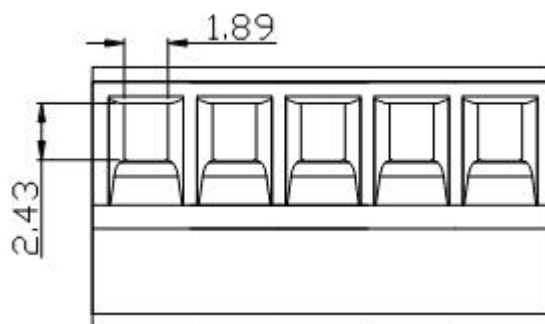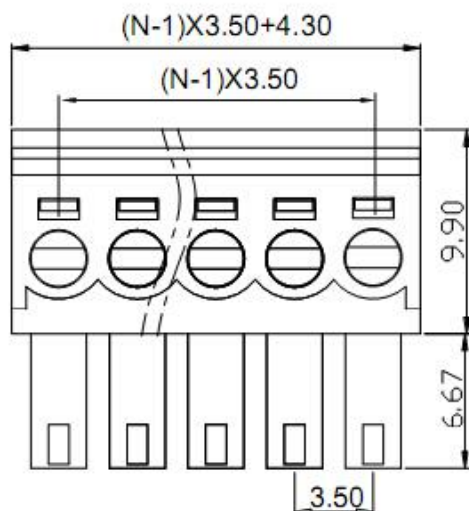

TECHINICAL DATA:

Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated Current	8A	7A
Wire Range	28-16AWG	1.5mm ²
Withstanding voltage	AC2000V/1Min	
Mechanical		
Torque	2.04kgf.cm	
Operation temperature	-40℃~+105℃	
Strip length	7mm	
Dimensions		
Pitch	3.5mm	
Poles	2P-24P	
Material		
Housing	PA66,UL94V-0	
Screws	M2,steel,Cr ³⁺ Zn plated	
Cage	Brass,Ni plated	
Pin header	—	

APPLICATION:

Elevator, Industry, Security, Instrument, Machinery, Communication, Lighting, Construction, Electrical

MATCHING PARTS:

Female \ Male	15EGTVC-3.5	15EGTRC-3.5
	√	√