
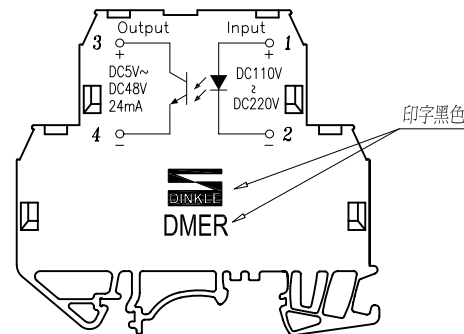





印字面 (SCALE 1:1)

Normal Geometric Tolerancing			
— //		≡	⊥
0 to 100	0.2	0.3	0 to 10 0.2
over 100 to 150	0.3		over 10 0.3
over 150	0.5		
Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0~30	±0.25
30<U<=53	±0.25	over 30~53	±0.30
53<U<=70	±0.30	over 53~70	±0.35
70<U<=90	±0.35	over 70~90	±0.44
90<U<=115	±0.44	over 90~115	±0.55
115<U<=150	±0.55	over 115~150	±0.70
150<U<=200	±0.70	over 150~200	±0.85
200<U<=250	±0.85	over 200~250	±1.00
250<U<=320	±1.00	over 250~320	±1.20

NOTES:

- Rating: UL 300V 20A
- Insulation Withstands Voltage: AC 2000V at 1 minute
- Insulation Resistance: 500MΩ or more at DC1000V
- Using Temperature Range: -40°C~+105°C
- Screw Torque Value: 0.4N•m
- Suitable Electric Wire: AWG 24~12 (2.5mm²)
- RoHS compliance
- 本体为黑色时印字白色, 本体为其它颜色时印字黑色

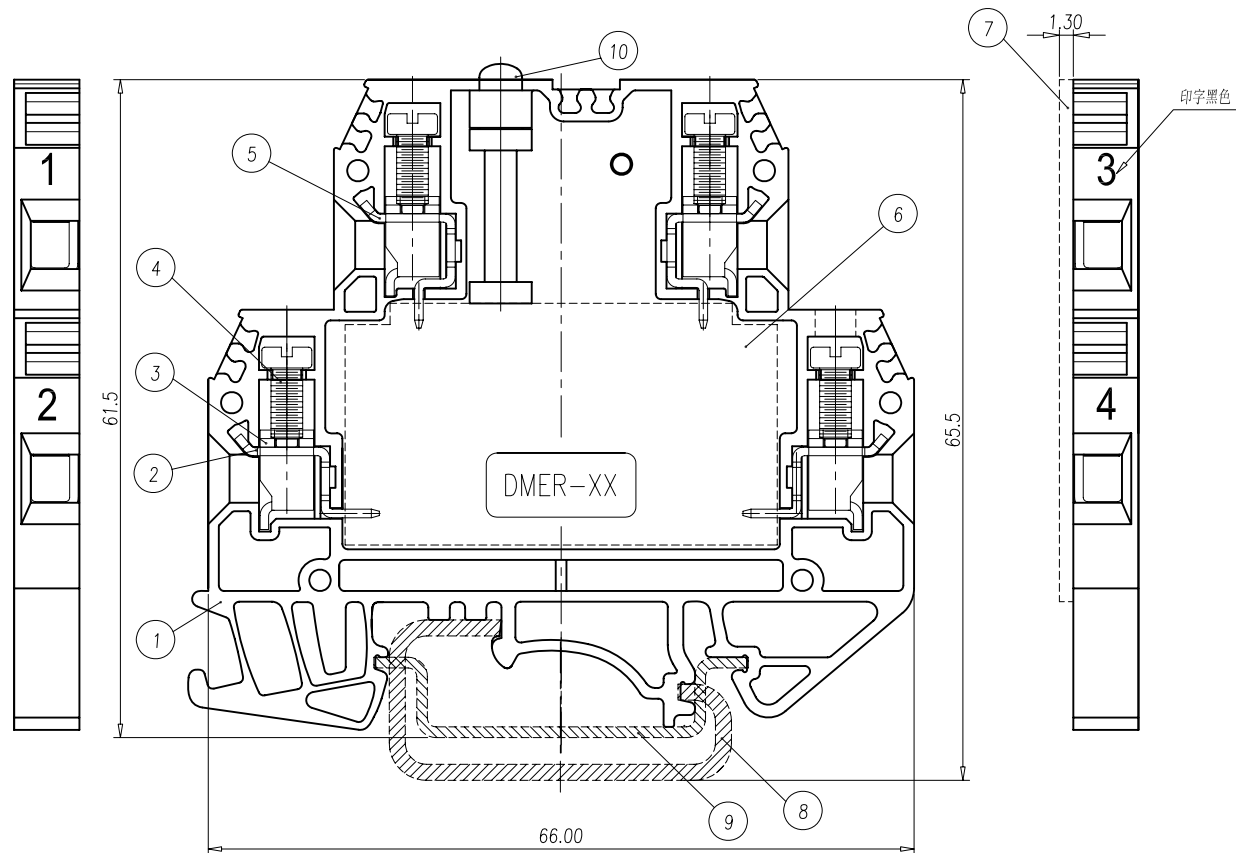

10	LIGHT GUIDANCE	PC 920A	Transparent
9	MOUNTING RAIL	STEEL	此為模擬件, 實際產品不裝
8	MOUNTING RAIL	STEEL	
7	END COVER2	PA66	
6	PCB		
5	SOLDER PIN2	COPPER-ALLOY	Tin Plated
4	SCREW	STEEL	M3/Zn Plated
3	WIRE CAGE	STEEL	
2	SOLDER PIN1	COPPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	HQY	DATE	12.09.10	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	2:1 (:)		
APP.		DATE		NAME	DMER-03		
 DINKLE				DWG NO.	SP-03-DMER0300		
DINKLE ENTERPRISE CO.,LTD							



REV.

CONTENT

CHK.

DATE

DINKLE
ENTERPRISE CO., LTDNAME
DWG NO.