



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

NBC Series

• 105°C 5,000~12,000Hrs assured.

- Non-solvent proof
- High Ripple, Long Life, Low Temp.
- For SMPS, IP-Board, Adaptor, LED Lighting
- RoHS compliant.
- Halogen-free capacitors are also available.
- AEC-Q200 compliant : Please contact us for more details, test data, information.

NFR

NBC

High Ripple, Low Temp.




SPECIFICATIONS

Item	Characteristics		
Rated Voltage Range	160~500 V _{DC}		
Operating Temperature Range	-40~ +105°C		
Capacitance Tolerance	$\pm 20\% (M)$ (at 20°C, 120Hz)		
Leakage Current	C · V	Time	After 1 minute After 5 minutes
	≤ 1000		$I = 0.1CV + 40$ $I = 0.03CV + 15$
	> 1000		$I = 0.04CV + 100$ $I = 0.02CV + 25$
Where, I:Max. Leakage current(μA) C:Nominal capacitance(μF) V:Rated voltage(V _{DC}) (at 20°C)			
Dissipation Factor(Tanδ)	Rated Voltage(V _{DC})	160~250	350~500
	Tanδ(Max.)	0.20	0.24
Temperature Characteristics (Max. Impedance ratio)	Rated Voltage(V _{DC})	160~500	
	$Z(-25^\circ\text{C})/Z(20^\circ\text{C})$	3	
	$Z(-40^\circ\text{C})/Z(20^\circ\text{C})$	6	(at 120Hz)
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 12,000 hours at 105°C. (where 5,000 hours for Ø6.3, 8,000 hours for Ø8, 10,000 hours for Ø10)		
	Capacitance change	$\leq \pm 20\%$ of the initial value	
	Tanδ	$\leq 200\%$ of the initial specified value	
Shelf Life	Leakage current	\leq The initial specified value	
	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.		
	Capacitance change	$\leq \pm 20\%$ of the initial value	
Others	Tanδ	$\leq 200\%$ of the initial specified value	
	Leakage current	$\leq 500\%$ of the initial specified value	
	Satisfied characteristics KS C IEC 60384-4		

DIMENSIONS OF NBC Series

Unit(mm)

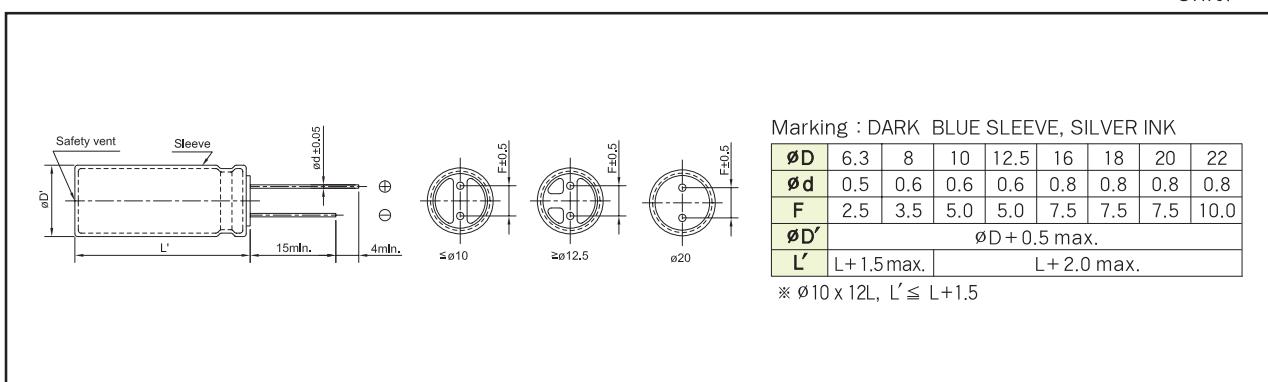

RATINGS OF NBC Series

V _{dc}	160		200		250		350	
μF	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)
4.7			8 × 11.5	77	8 × 15	80	8 × 11.5	93
6.8	8 × 11.5	90	8 × 15	103	8 × 20	106	8 × 15	101
10	8 × 15	121	8 × 11.5	113	10 × 12	160	10 × 12	153
			8 × 20	140	10 × 12.5	160	10 × 12.5	153
15	8 × 15	148	8 × 15	148	10 × 12	174	10 × 20	197
			10 × 12.5	221	10 × 12.5	221	10 × 16	158
22	10 × 12.5	221	10 × 16	243	10 × 16	230	12.5 × 20	297
	10 × 12	240						
27	10 × 12.5	240	10 × 16	264	10 × 20	270	12.5 × 20	314
	10 × 16	264						
33	10 × 16	270	10 × 20	308	12.5 × 20	323	12.5 × 20	319
39	10 × 16	292	10 × 20	336	12.5 × 20	354	12.5 × 25	352
47	10 × 20	369	10 × 20	369	12.5 × 20	440	12.5 × 30	451
			12.5 × 20	440				
68	10 × 20	400	12.5 × 20	492	12.5 × 25	594	16 × 25	605
			12.5 × 25	594				
82	10 × 25	455	12.5 × 25	616	12.5 × 30	660	18 × 25	688
	12.5 × 20	495	16 × 20	616				
100	12.5 × 20	561	12.5 × 30	700	16 × 25	717	18 × 31.5	817
			16 × 25	717				
120	10 × 33	638	12.5 × 35	815	16 × 25	785	18 × 35.5	924
	12.5 × 25	638	16 × 25	785				
150	16 × 25	825	16 × 25	836	18 × 25	902	18 × 35.5	1,036
180	16 × 25	891	16 × 31.5	935	18 × 31.5	1,012	18 × 40	1,155
220	16 × 31.5	968	18 × 31.5	1,100	18 × 31.5	1,100		
270	16 × 35.5	1,100	18 × 35.5	1,265				
330	16 × 40	1,256	18 × 40	1,375				
470	18 × 40	1,541						

V _{dc}	400		420		450		500	
μF	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)	Ø D × L (mm)	Rated Ripple Current (mArms/105°C, 120Hz)
1	6.3 × 11	22	6.3 × 11	17	6.3 × 11	17		
1.5	6.3 × 15	32	6.3 × 15	24	6.3 × 15	24		
	8 × 11.5	34	8 × 11.5	26	8 × 11.5	26		
2.2	8 × 11.5	41	8 × 11.5	30	8 × 15	33		
3.3	8 × 11.5	50	8 × 11.5	37	8 × 11.5	37	10 × 12	63
							10 × 12.5	63
4.7	8 × 11.5	60	8 × 11.5	44	10 × 12	76	10 × 12	75
					10 × 12.5	76	10 × 12.5	75
6.8	8 × 15	94	8 × 20	105	8 × 20	105	10 × 16	110
	8 × 20	119						
8.2	10 × 12	132	10 × 16	113	10 × 16	113	10 × 20	141
	10 × 12.5	132						
10	10 × 16	145	10 × 20	135	10 × 20	135	12.5 × 20	165
22	12.5 × 20	297	12.5 × 20	225	12.5 × 25	250	12.5 × 30	260
27	12.5 × 20	314	12.5 × 20	254	12.5 × 25	265	12.5 × 40	329
33	12.5 × 25	343	12.5 × 30	340	12.5 × 30	340	12.5 × 45	370
			16 × 20	345	16 × 20	345	16 × 25	350
39	12.5 × 25	352	12.5 × 35	380	12.5 × 35	380	12.5 × 50	420
	12.5 × 30	378	16 × 25	400	16 × 25	400	16 × 31.5	413
47	12.5 × 35	462	12.5 × 40	450	12.5 × 40	450	16 × 35.5	462
	16 × 25	480	16 × 25	450	16 × 25	450	18 × 31.5	468
68	12.5 × 40	550	18 × 25	520	18 × 25	560	16 × 45	630
	18 × 25	627	18 × 31.5	580	18 × 31.5	590	18 × 35.5	600
82	18 × 25	700	18 × 25	600	16 × 40	650	16 × 50	685
	18 × 31.5	770	18 × 31.5	650	18 × 31.5	650	18 × 40	670
100	18 × 31.5	817	16 × 45	770	16 × 45	770	18 × 45	800
	18 × 35.5	875	18 × 35.5	770	18 × 35.5	770	20 × 40	800
120	18 × 35.5	924	16 × 50	850	16 × 50	850	22 × 35	800
	18 × 40	1,003	18 × 40	850	18 × 40	850		
150	18 × 40	1,122	18 × 45	1,000				
			20 × 40	1,000				
180	18 × 45	1,188						
	20 × 40	1,188						

RATED RIPPLE CURRENT MULTIPLIERS

Frequency Multipliers

Cap. (μF)	Freq. (Hz)	120	1k	10k	50k	100k
1 ~ 82		1.00	1.75	2.25	2.35	2.50
100 ~ 470		1.00	1.67	2.05	2.15	2.25