

FEATURES

for general purpose, high volt

As complementary types the PNP transistors 2N5401 are recommended.

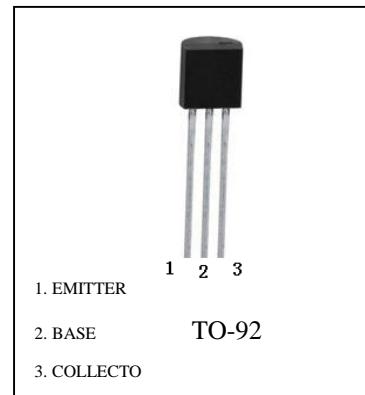
Low current(max. 600mA),High voltage(max.180V)

MARKING:2N5551

MAXIMUM RATINGS (TA=25 °C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	180	V
Collector-Emitter Voltage	V _{CEO}	160	V
Emitter-Base Voltage	V _{EBO}	6	V
Collector Current -Continuous	I _C	600	mA
Collector Power Dissipation	P _C	625	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{Stg}	-55-150	°C

2N5551 (NPN)



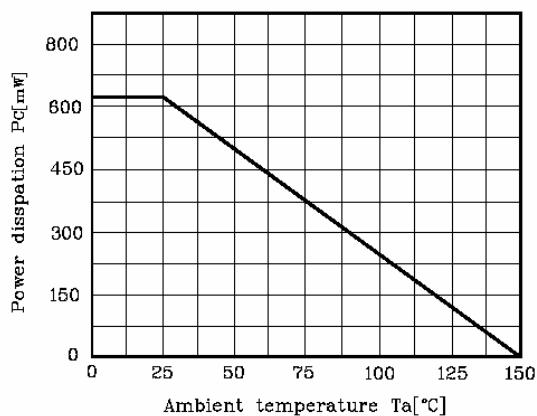
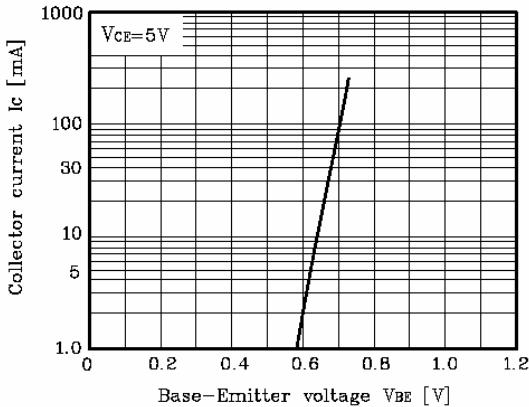
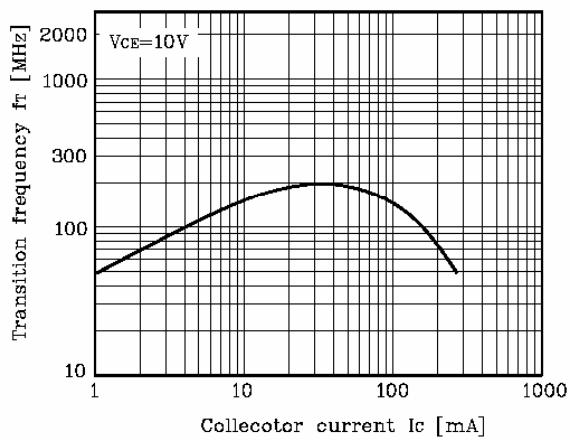
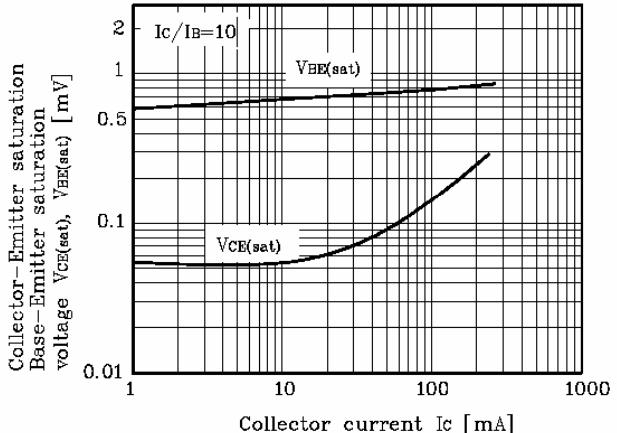
ELECTRICAL CHARACTERISTICS (Tamb=25 °C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{CBO}	I _C =100μA,I _E =0	180			V
Collector-emitter breakdown voltage	V _{CEO}	I _C = 1mA, I _B =0	160			V
Emitter-base breakdown voltage	V _{EBO}	I _E = 10μA, I _C =0	6			V
Collector cut-off current	I _{CBO}	V _{CB} = 120V, I _E =0			50	nA
Emitter cut-off current	I _{EBO}	V _{EB} = 4V, I _C =0			50	nA
DC current gain	h _{FE1}	V _{CE} =5V, I _C =1mA	80			
	h _{FE2}	V _{CE} =5V, I _C =10mA	100		300	
Collector-emitter saturation voltage	V _{CE (sat)}	I _C =10mA, I _B =1mA			0.15	V
		I _C =50mA, I _B =5mA			0.2	
Base-emitter saturation voltage	V _{BE (sat)}	I _C =10mA, I _B = 1mA			1	V
		I _C =50mA, I _B = 5mA			1	
Transition frequency	f _T	V _{CE} =10V,I _C =10mA,f=100MHz	100		300	MHz
Collector output capacitance	C _{obo}	V _{CB} =10V,I _E =0,f=1MHz			6	pF
Input capacitance	C _{ib}	V _{BE} =0.5V,I _C =0,f=1MHz			20	pF
Noise figure	N _F	V _{CE} =5V,I _C =0.25mA, f=10Hz to 15.7KHz,R _s =1k			8	dB

CLASSIFICATION OF HFE

Rank	A	B	C
Range	100-150	150-200	200-300

2N5551 Typical Characteristics

Fig. 1 P_C - T_a

Fig. 2 I_C - V_{BE}

Fig. 3 f_T - I_C

Fig. 4 $V_{CE(sat)}$, $V_{BE(sat)}$ - I_C

Fig. 5 C_{ob} - V_{CB}
