



IP 65

WAC3



● WAC3 Series

WAC3MPA-1




WAC3FCA

WAC3MPB-1




WAC3FCB

● Receptacle

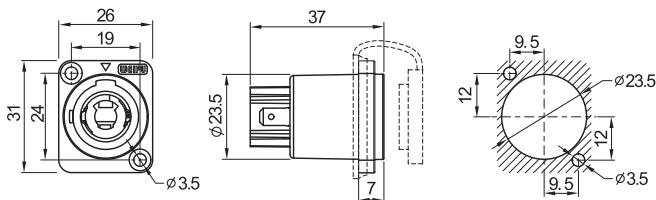

● Plug

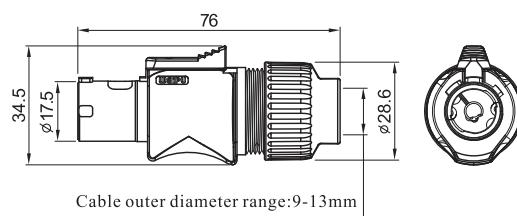

Material and spec

| | |
|----------------------------|---------------------------------------------------|
| Coupling | Bayonet |
| Shell | Plug: Nylon66 Socket: PC |
| Contact material | Brass with silver plating |
| Rated current (A) | 20 |
| Rated voltage (AC.V) | 250 |
| Test voltage (AC.V) 1 min | 2500 |
| Insulation resistance (MΩ) | 2000 |
| Mating cycle | 1000 |
| Temperature range | -40°C ~ +85°C |
| IP range | IP65 |
| Termination | Plug: screw, Receptacle: 3/16" flat tab terminals |