

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED			
A	NEW RELEASE	LL 10/29/06'					

NOTES:

1. SPECIFICATIONS

- . Contact Resistance: 50mΩ max
- . Insulator Resistance: 100MΩ min.
- . Current Rating: 1.5 A.
- . Rated Voltage: 30V DC
- . Dielectric withstanding voltage: AC 100V For 1 minute
- . Contact: Copper Alloy
- . Housing: Thermoplastic(UL 94V-0)




2. PRODUCT NUMBER CODE:

DS1101 - X X X

Contact plating
C: Selective 3u" gold

Shell plating
N: Nickel
6: Tin

Color of housing
B: Black

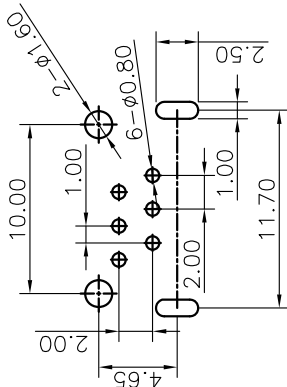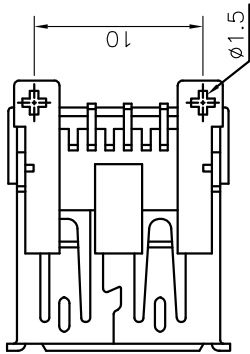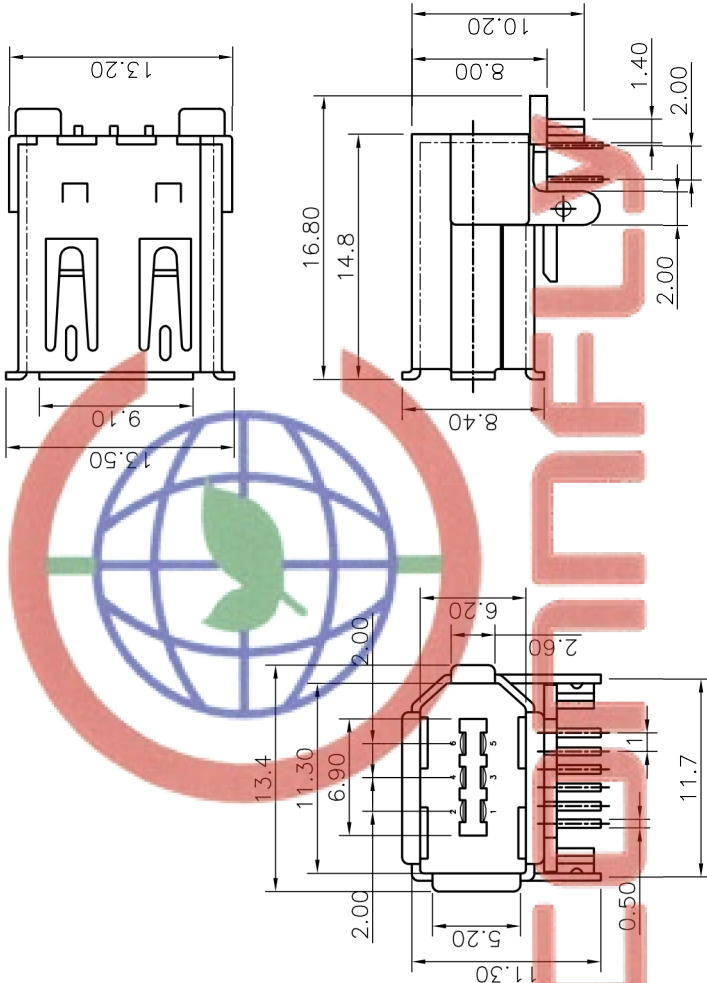

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE	UNIT	SHEET SIZE	SERIES	DS1101	SERIES
X: ±0.60 .X: ±0.38 .XX: ±0.25	X: ±5° .X: ±3° .XX: ±2°	mm	IEEE 1394 Female 6PIN R/A TYPE	A4	DS1101	DS1101	DS1101	DS1101
DRAWING TYPE	CUSTOMER	DRAWING NO.	SCALE	1:1	SHEET 1 OF 1	C-DS1101-XXX		

RECOMMEND P.C.B LAYOUT(TOLERANCE±0.05)