


## Terminals Series

### KLS8-01103 Circular pre-insulation Terminals Series


Maximum Electrical Rating: 105°C 600 Volts Max.  
Insulation Material: Vinyl  
Terminal Material: Copper

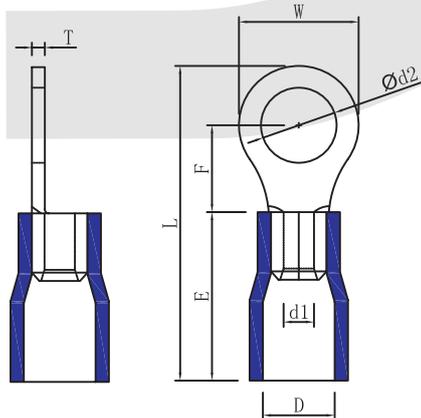

Item No.	Conductor cross-section	Dimension							Color
		USA Bolt No.	d2	W	L	F	E	D	
				mm	mm	mm	mm	mm	
RV1. 25-3	0.5~1.5mm <sup>2</sup> (22~16A. W. G.) I Max=19A T Size:0.75mm	#4	3.2mm	5.7	17.8	4.95	10.0	4.3	Red
RVS1. 25-3.5		#6	3.7mm	5.7	17.8	4.95			
RVM1. 25-3.5		#6	3.7mm	6.6	20.1	6.3			
RVL1. 25-3.5		#6	3.7mm	8	21.5	7			
RVS1. 25-4		#8	4.3mm	6.6	20.1	6.3			
RVL1. 25-4		#8	4.3mm	8	21.5	7			
RV1. 25-5		#10	5.3mm	8	21.5	7			
RV1. 25-6		1/4	6.5mm	11.6	27.5	11.1			
RV1. 25-8		5/16	8.4mm	11.6	27.5	11.1			
RV1. 25-10		3/8	10.5mm	13.6	31.6	13.9			
RV2-3	1.5~2.5mm <sup>2</sup> (16~14A. W. G.) I Max=27A T Size:0.80mm	#4	3.2mm	6.6	17.8	4.3	10.0	4.9	Blue
RVS2-3.5		#6	3.7mm	6.6	17.8	4.3			
RVM2-3.5		#6	3.7mm	6.6	21	7			
RVL2-3.5		#6	3.7mm	8.5	22.5	7.75			
RVS2-4		#8	4.3mm	6.6	21.0	7.0			
RVL2-4		#8	4.3mm	8.5	22.5	7.75			
RVS2-5		#10	5.3mm	8.5	22.5	7.75			
RVL2-5		#10	5.3mm	9.5	22.5	7.25			
RV2-6		1/4	6.5mm	12.0	27.6	11.0			
RV2-8		5/16	8.4mm	12.0	27.6	11.0			
RV2-10	3/8	10.5mm	13.6	30.2	13.9				

## ORDER INFORMATION

KLS8-01103 - RV1. 25 - 3



## Terminals Series

### KLS8-01103 Circular pre-insulation Terminals Series

VIII

Item No.	Conductor cross-section	Dimension							Color
		USA Bolt No.	d2	W	L	F	E	D	
				mm	mm	mm	mm	mm	
RV3.5-4	2.5~4mm <sup>2</sup> (14~12A. W. G.) I Max=37A T Size:1.0mm	#8	4.3mm	8.0	24.8	7.7	12.5	6.2	Black 
RVS3.5-5		#10	5.3mm	8.0	24.8	7.7			
RVL3.5-5		#10	5.3mm	12.0	27.9	7.7			
RV3.5-6		1/4	6.5mm	12.0	27.9	7.7			
RV5.5-3.5	4~6mm <sup>2</sup> (12~10A. W. G.) I Max=48A T Size:1.0mm	#6	3.7mm	7.2	21.4	5.9	12.5	6.7	Yellow 
RVS5.5-4		#8	4.3mm	7.2	21.5	5.9			
RVL5.5-4		#8	4.3mm	9.5	25.5	8.3			
RV5.5-5		#10	5.3mm	9.5	25.5	8.3			
RV5.5-6		1/4	6.5mm	12.0	31.5	13.0			
RV5.5-8		5/16	8.4mm	15.0	33.7	13.7			
RV5.5-10		3/8	10.5mm	15.0	33.7	13.7			
RV5.5-12		1/2	13.0mm	19.2	38.1	16.0			

## ORDER INFORMATION

KLS8-01103 - RV1.25 - 3

