


PTF78FH232A-G14

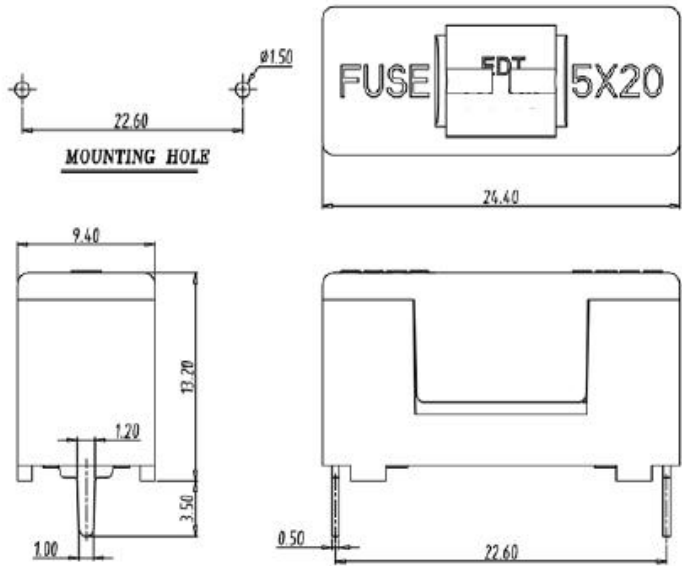

图示(Pic. shown) : PTF78FH232A-G14

General.	Fuse Type	Rated : 250V,6.3A 1.6W
	Pin pitch :	22.60mm
	Orientation:	90°(Fuse holder insertion direction to board)
	Screw clamp unit:	--

认证 (Approval) :   

◆ 技术参数Technical Data		UL standard			IEC standard		
◆ Fuse Type							
RATING		250V, 10A			250V, 6.3A 1.6W		
◆ TERMINAL BLOCK							
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)		--	--	--	--	--	--
额定电流(Rated current)		--	--	--	--	--	--
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				2000V			
额定冲击电压(Rated surge voltage)				--			
保险丝规格(Fuse Type)				Ø5.0*20			
接地螺丝(Grounding Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40°C up to +105°C (UL) / -40°C up to +85°C (IEC)			