




DEGSON ELECTRONICS CO., LTD.

Product Specification

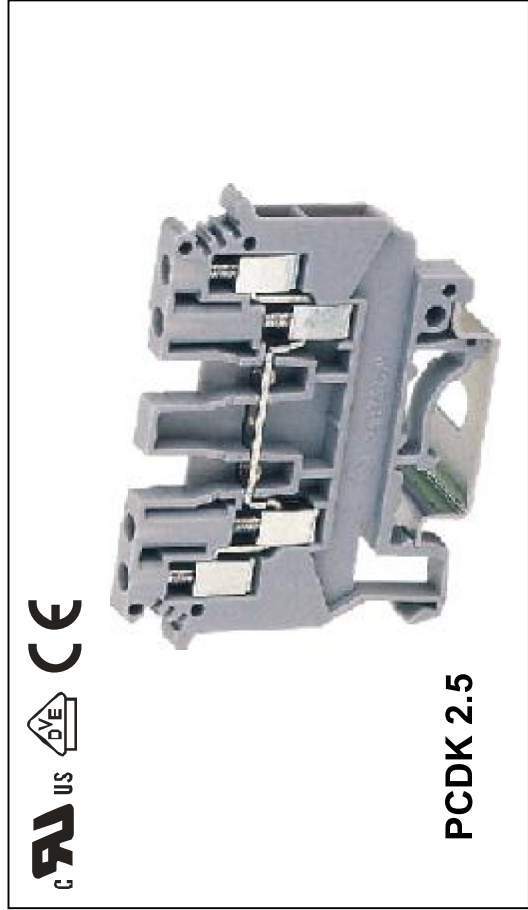

PCDK 2.5

Approval	UL US	UL US
Electrical Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	24A
Wire size	24-12AWG	0.2-2.5mm ²
TW/End plate		5.2/63.5/1.5mm
Height(NS35.7.5/NS32)		47/54.5/52.5mm
Rated surge voltage/Contamination class		6KV/3
Stripping length		8mm
Screw thread/Tightening torque		M3/0.5N.m/4.5Lb-in
Internal cylindrical gage		A3
Insulating material/Inflammability class		PAV-0
Specification	Model	Pieces
(1) Terminal block	PCDK 2.5	50
(2) Cover	D-PCDK 2.5	100
(3) Fixed bridge 10P		
(4) Fixed bridge 2P	FBRI 2-5	10
(4) Fixed bridge 3P	FBRI 3-5	10
(4) Fixed bridge 4P	FBRI 4-5	10
(4) Fixed bridge 10P	FBRI 10-5	10
(5) Insertion bridge 2P	EB 2-5	100
(5) Insertion bridge 3P	EB 3-5	100
(5) Insertion bridge 10P	EB 10-5	10
(6) Isolator bridge bar, 10P		
(7) Bridge bar isolator		
(8) Switching bridge		
(9) Separating plate	TS-KK3	50
(10) Zack strip	ZB5	

HOW TO ORDER :


Series No. - P 1 —

No. of pole

Color

1	Gray	4	Green	7	Transparent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

Customer Request

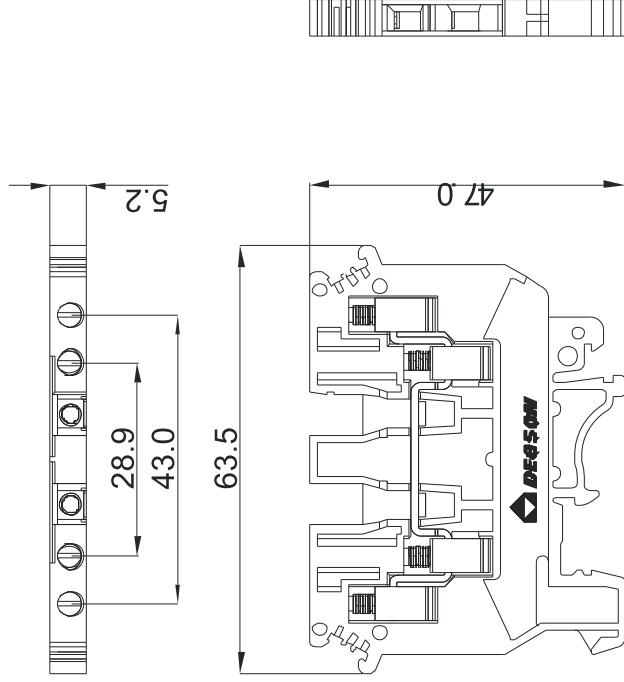

	DEGSON ELECTRONICS CO., LTD.
mm (INCH)	NAME
THROUANG F PROJECTION	PCDK 2.5