


## Lift Principle

AK(Z) 1550

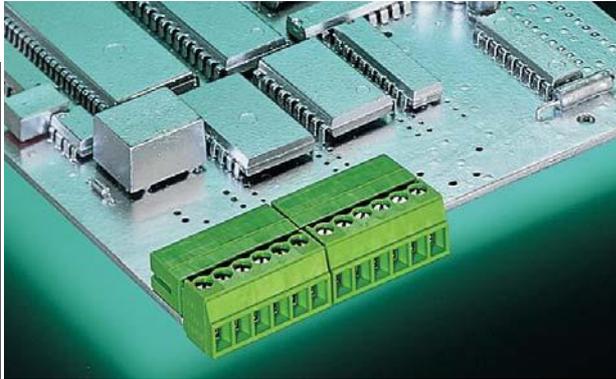

### AK(Z) 1550/.. - 3.5 (3.81) - GREEN


also available: ..L

2-20 poles, Spacing 3,5 mm and 3,81 mm

insert required no. of poles ..

How to order see page 11

AK(Z) 1550

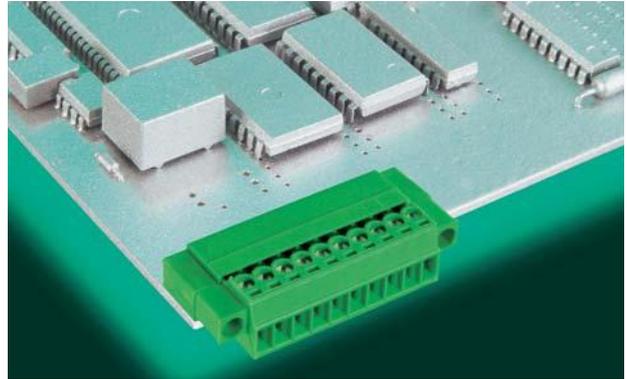

### AK(Z) 1550/.. F - 3.5 (3.81) - GREEN

also available: ..FL

2-20 poles, Spacing 3,5 mm and 3,81 mm

insert required no. of poles ..

How to order see page 11

#### Ratings:

|                                   |  |  |
|-----------------------------------|---|---|
| Rated Voltage                     | 300 V   | 160 V   |
| Rated Current                     | 8 A   | 9 A (T60)   |
| Overvoltage Category              |   | III   |
| Wire Size                         | AWG 28-16   | 1,5 mm <sup>2</sup>   |
| Rating Impulse Voltage/Dirt Level |   | 2,5 kV/3  |
| Rated Torque / Screw Size         |   | 0,4 Nm/M2   |

#### Max. Rated Cross Section

|                             |                     |
|-----------------------------|---------------------|
| Single Wire (solid)         | 1,5 mm <sup>2</sup> |
| Stranded Wire (flexible)    | 1,0 mm <sup>2</sup> |
| Stranded wire with Ferrules | 1,0 mm <sup>2</sup> |

#### Dimensions

|                 |                  |
|-----------------|------------------|
| Spacing         | 3,5 mm (3,81 mm) |
| Stripped Length | 7,0 mm           |

#### Materials

|                     |              |
|---------------------|--------------|
| Insulating Material | PA           |
| Flammability Class  | UL94 V-0     |
| Temperature Range   | -30°C/+105°C |
| Terminal Block      | CuZn         |
| Contact             | CuSn         |
| Colour              | green        |
|                     | RAL 6018     |

#### Ratings:

|                                   |  |  |
|-----------------------------------|---|---|
| Rated Voltage                     | 300 V   | 160 V   |
| Rated Current                     | 8 A   | 9 A (T60)   |
| Overvoltage Category              |   | III   |
| Wire Size                         | AWG 28-16   | 1,5 mm <sup>2</sup>   |
| Rating Impulse Voltage/Dirt Level |   | 2,5 kV/3  |
| Rated Torque / Screw Size         |   | 0,4 Nm/M2   |

#### Max. Rated Cross Section

|                             |                     |
|-----------------------------|---------------------|
| Single Wire (solid)         | 1,5 mm <sup>2</sup> |
| Stranded Wire (flexible)    | 1,0 mm <sup>2</sup> |
| Stranded wire with Ferrules | 1,0 mm <sup>2</sup> |


#### Dimensions

|                 |                  |
|-----------------|------------------|
| Spacing         | 3,5 mm (3,81 mm) |
| Stripped Length | 7,0 mm           |

#### Materials

|                     |              |
|---------------------|--------------|
| Insulating Material | PA           |
| Flammability Class  | UL94 V-0     |
| Temperature Range   | -30°C/+105°C |
| Terminal Block      | CuZn         |
| Contact             | CuSn         |
| Colour              | green        |
|                     | RAL 6018     |

### AK(Z) 1550

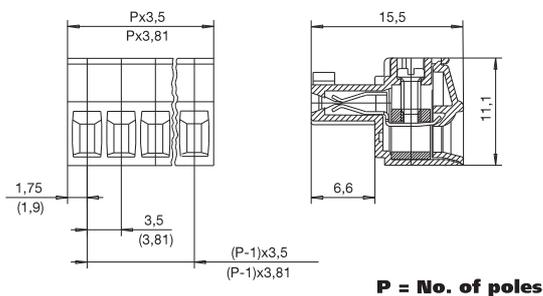

### AK(Z) 1550 Flange

