



PORTAFUSIBILI  
FUSE - HOLDERS  
PORTE-FUSIBLES  
SICHERUNGSHALTER

TIPO  
TYPE  
TYPE  
TYP


PTF / 80  
PTF / 80A

PER FUSIBILI  
FOR FUSES  
POUR FUSIBLES  
FÜR SICHERUNGEN


5 X 20  
6,3 X 32



PTF / 80

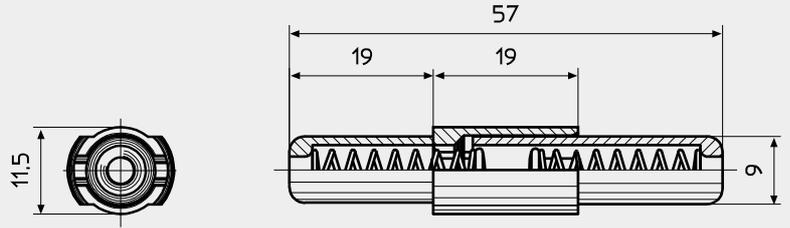

PTF / 80 A

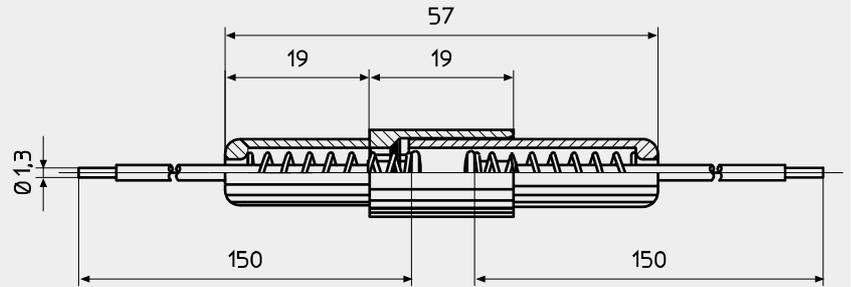

VOLANTE

IN-LINE

EN LIGNE

DRANTANSCHLUB

CE

Corpo isolante Nero	Insulating body Black	Corps Isolant Noir	Isolierkörper Schwarz	PA 6
Contatti	Contacts	Contacts	Kontakte	CuZn 37 + Ni
Cavo	Cable	Câble	Kabel	L= 150 mm-0,75 mm <sup>2</sup>
Categoria	Class	Catégorie	Baureihe	PC1
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	6,3 A
Tensione	Voltage	Tension	Betriebsspannung	250 V
Potenza dissipabile	Operating power	Puissance dissipable	Ausgangsleistung	1,6 W
Resistenza di contatto	Contact resistance	Résistance de contact	Übergangswiderstand	< 5 m Ω
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	>10 <sup>2</sup> M Ω
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	> 3000 Vac / 60 "