


## Technical Data Sheet

### Photocoupler

#### EL817 Series

##### Features :

- Current transfer ratio  
(CTR:MIN.50% at IF =5mA ,VCE =5V)
- High isolation voltage between input and output (Viso=5000 V rms )
- Compact dual-in-line package  
EL817\*:1-channel type
- Pb free
- UL approved (No. E214129)
- VDE approved (No. 132249)
- SEMKO approved (No. 0143133/01-03)
- NEMKO approved (No. P00102385)
- DEMKO approved (No. 310352-04)
- FIMKO approved (No. FI 16763A2)
- CSA approved (No. 1143601)
- BSI approved (No. 8592 / 8593)
- Options available:
  - Leads with 0.4"(10.16mm) spacing (M Type)
  - Leads bends for surface mounting (S Type)
  - Tape and Reel of Type I for SMD(Add"-TA" Suffix)
  - Tape and Reel of Type II for SMD(Add"-TB" Suffix)
  - The tape is 16mm and is wound on a 33cm reel

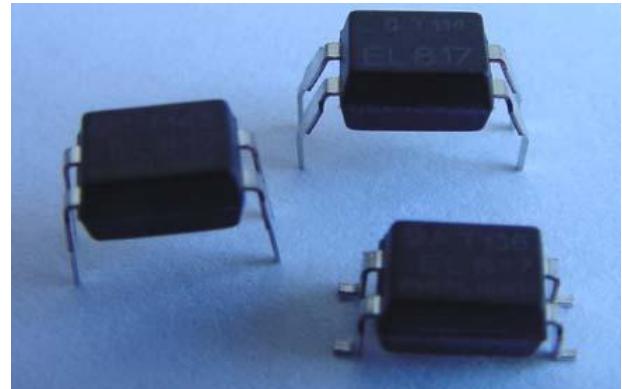

#### Description

The EL817 series contains a infrared emitting diode optically coupled to a phototransistor. It is packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

#### Applications

- Computer terminals
- System appliances, measuring instruments
- Registers, copiers, automatic vending machines
- Cassette type recorder
- Electric home appliances, such as fan heaters, etc.
- Signal transmission between circuits of different potentials and impedances

# Technical Data Sheet


## Photocoupler

### EL817 Series

#### Device Selection Guide

| Part. No. | Chip Material |         |
|-----------|---------------|---------|
|           | IR            | PT      |
| EL817*    | GaAs          | Silicon |

#### Package Dimensions

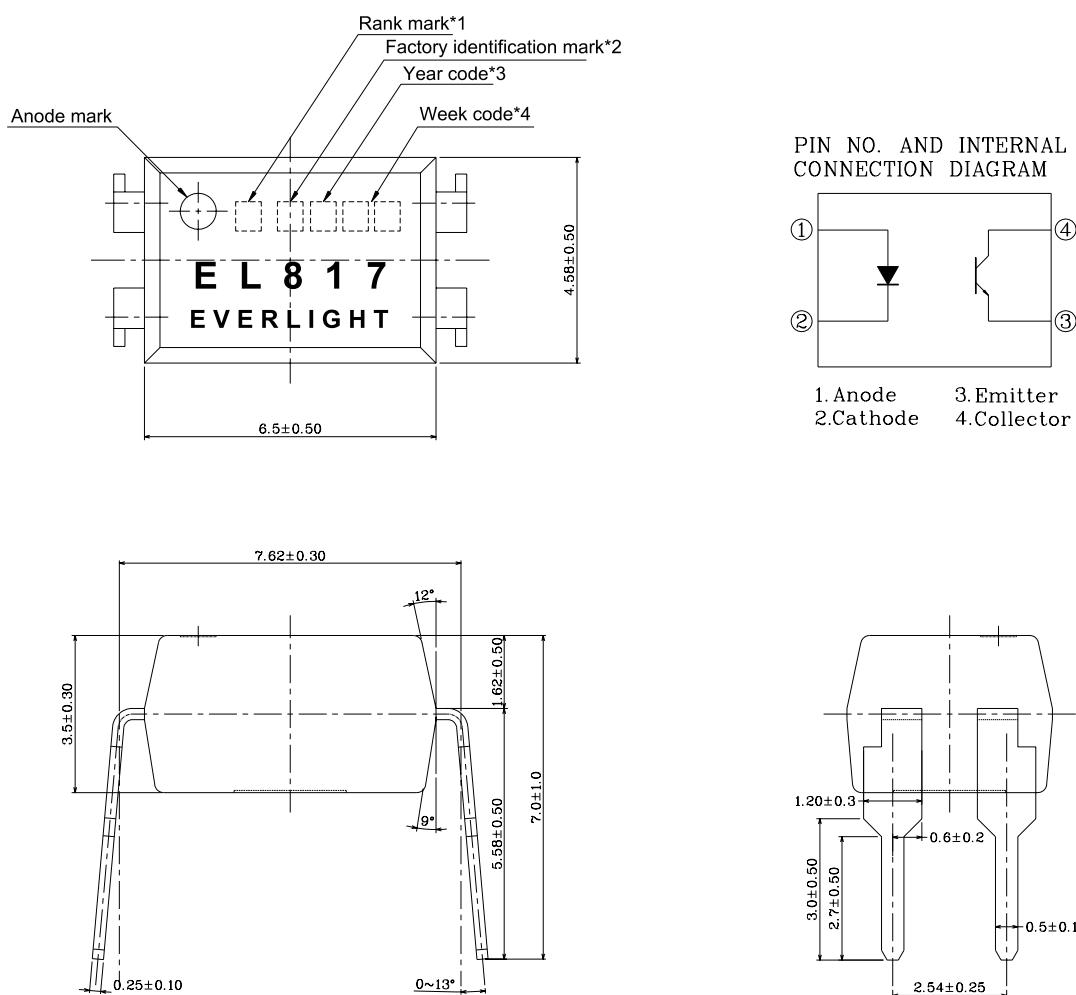


# Technical Data Sheet

## Photocoupler


### EL817 Series

#### Package Dimensions

##### M Type

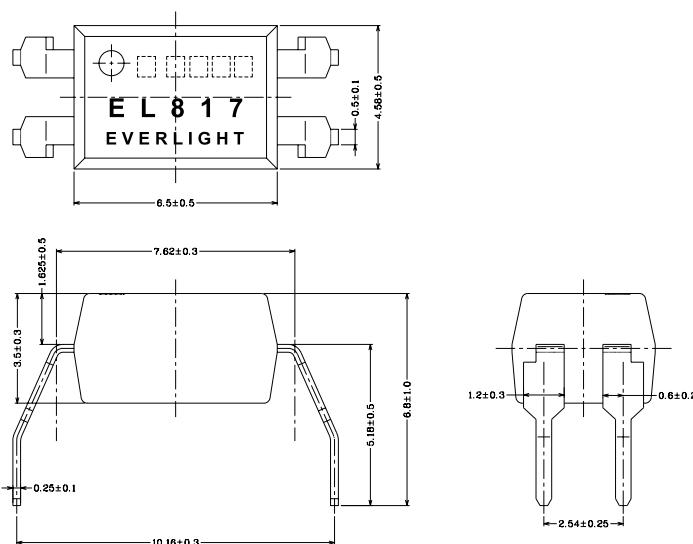

##### S Type

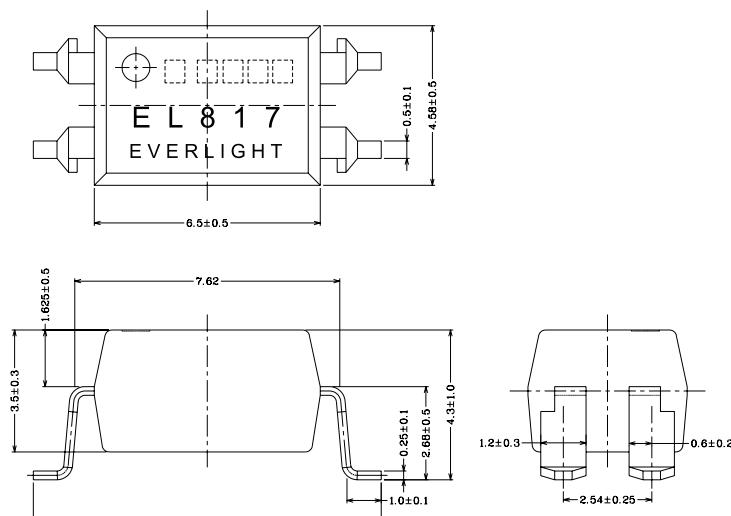

#### Notes:

1. Rank shall be or shall not be marked
2. Factory code shall be marked (T: Taiwan / C: China)
3. Year date code
4. 2-digit work week
5. All dimensions are in millimeters
6. Specifications are subject to change without notice

# Technical Data Sheet

## Photocoupler

### EL817 Series

#### Absolute Maximum Ratings

( Ta=25°C )

| Parameter                            |                             | Symbol            | Rating   | Unit  |
|--------------------------------------|-----------------------------|-------------------|----------|-------|
| Input                                | Forward Current             | I <sub>F</sub>    | 50       | mA    |
|                                      | Reverse Voltage             | V <sub>R</sub>    | 6        | V     |
|                                      | Power Dissipation           | P                 | 70       | mW    |
| Output                               | Collector Power Dissipation | P <sub>C</sub>    | 150      | mW    |
|                                      | Collector Current           | I <sub>C</sub>    | 50       | mA    |
|                                      | Collector-Emitter Voltage   | V <sub>C EO</sub> | 35       | V     |
|                                      | Emitter-Collector Voltage   | V <sub>E CO</sub> | 6        | V     |
| Total Power Dissipation              |                             | P <sub>tot</sub>  | 200      | mW    |
| * <sup>1</sup> Isolation Voltage     |                             | V <sub>iso</sub>  | 5000     | V rms |
| Operating Temperature                |                             | T <sub>opr</sub>  | -55~+110 | °C    |
| Storage Temperature                  |                             | T <sub>stg</sub>  | -55~+125 | °C    |
| * <sup>2</sup> Soldering Temperature |                             | T <sub>sol</sub>  | 260      | °C    |

\*<sup>1</sup> AC for 1 minute, R.H= 40~ 60%RH

-Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector, emitter and base on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave

\*<sup>2</sup> For 10 seconds

# Technical Data Sheet

## Photocoupler

### EL817 Series

#### Electro-Optical Characteristics

(Ta=25°C)

| Parameter                |                                      | Symbol               | Min.               | Typ.             | Max. | Unit | Condition   |
|--------------------------|--------------------------------------|----------------------|--------------------|------------------|------|------|---|
| Input                    | Forward                              | V <sub>F</sub>       | -                  | 1.2              | 1.4  | V    | I <sub>F</sub> =20mA  |
|                          | Reverse Current                      | I <sub>R</sub>       | -                  | -                | 10   | uA   | V <sub>R</sub> =4V  |
|                          | Terminal                             | C <sub>t</sub>       | -                  | 30               | 250  | pF   | V=0,f=1kHz  |
| Output                   | Collector<br>Dark current            | I <sub>CEO</sub>     | -                  | -                | 100  | nA   | V <sub>CE</sub> =20V  |
|                          | Collector-Emitter breakdown voltage  | BV <sub>CEO</sub>    | 35                 | -                | -    | V    | I <sub>c</sub> =0.1mA   |
| Transfer Characteristics | Current Transfer ratio               | CTR                  | 50                 | -                | 600  | %    | I <sub>F</sub> =5mA ,V <sub>CE</sub> =5V                                |
|                          | Collector-Emitter saturation voltage | V <sub>CE(sat)</sub> | -                  | 0.1              | 0.2  | V    | I <sub>F</sub> =20mA ,I <sub>c</sub> =1 mA                              |
|                          | Isolation resistance                 | R <sub>ISO</sub>     | 5x10 <sup>10</sup> | 10 <sup>11</sup> | -    | Ω    | DC500V,40~60%R.H  |
|                          | Floating capacitance                 | C <sub>f</sub>       | -                  | 0.6              | 1.0  | pF   | V=0, f=1MHz   |
|                          | Cut-off frequency                    | f <sub>c</sub>       | -                  | 80               | -    | kHz  | V <sub>CE</sub> =5V, I <sub>c</sub> =2 mA<br>R <sub>L</sub> =100Ω, -3dB |
|                          | Rise time                            | t <sub>r</sub>       | -                  | 4                | 18   | us   | V <sub>CE</sub> =2V<br>I <sub>c</sub> =2mA,R <sub>L</sub> =100Ω         |
|                          | Fall time                            | t <sub>f</sub>       | -                  | 3                | 18   | us   |   |

# Technical Data Sheet

## Photocoupler

### EL817 Series

#### Supplement

##### Current Transfer Ratio CTR

| Sub-Model No.    | Rank mark | CTR (%)    | Condition  |
|------------------|-----------|------------|--|
| EL817* note 1    |           | 50 to 600  | $I_F = 5 \text{ mA}$<br>$V_{CE} = 5 \text{ V}$<br>$T_a = 25^\circ\text{C}$ |
| EL817* (L) note2 | L         | 50 to 100  |  |
| EL817* (A)       | A         | 80 to 160  |  |
| EL817* (B)       | B         | 130 to 260 |  |
| EL817* (C)       | C         | 200 to 400 |  |
| EL817* (D)       | D         | 300 to 600 |  |
| EL817* (AB)      | A or B    | 80 to 260  |  |
| EL817* (BC)      | B or C    | 130 to 400 |  |
| EL817* (CD)      | C or D    | 200 to 600 |  |

Note1. The symbol “ \* ” can be none or S or M by different leads form request

Note2. The symbol “ ( ) ” can be CTR rank

Fig. 1 Forward Current vs.  
Ambient Temperature


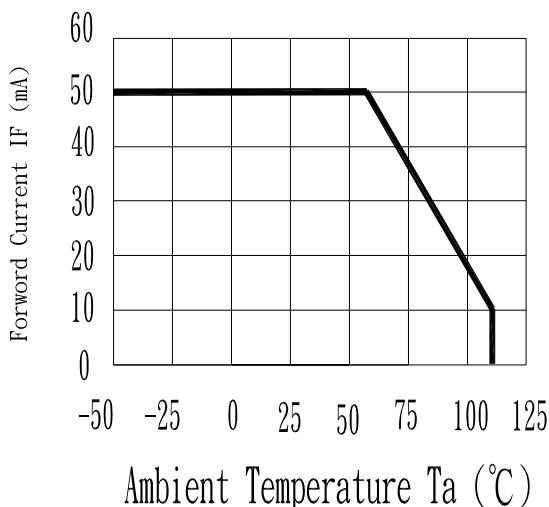


Fig. 2 Collector Power Dissipation vs.  
Ambient Temperature

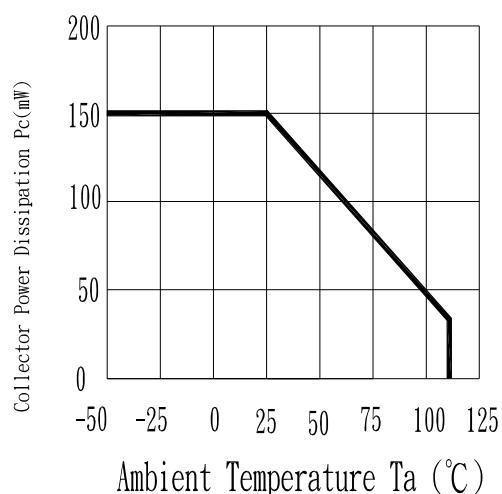

# Technical Data Sheet

## Photocoupler

### EL817 Series

Fig.12



Fig. 3

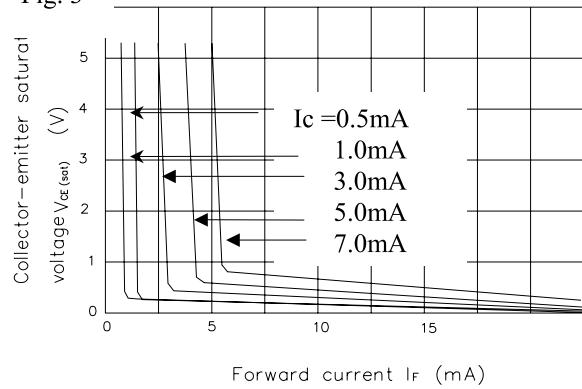


Fig.5 Forward Current vs. Forward Voltage

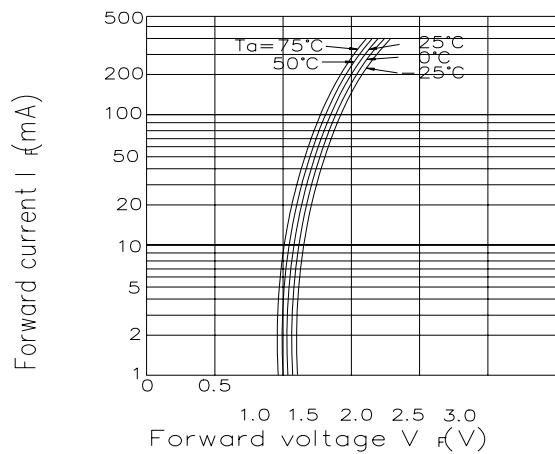


Fig. 7

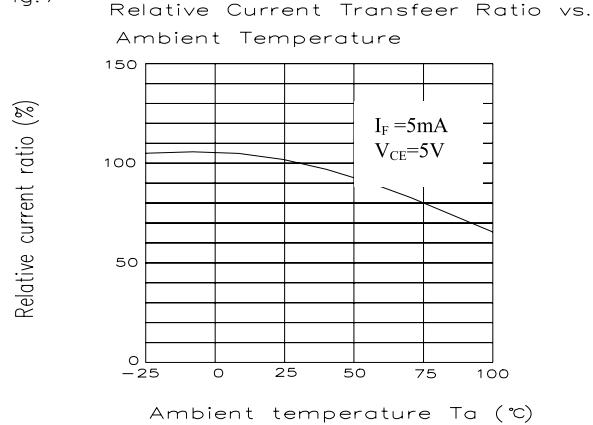


Fig.4

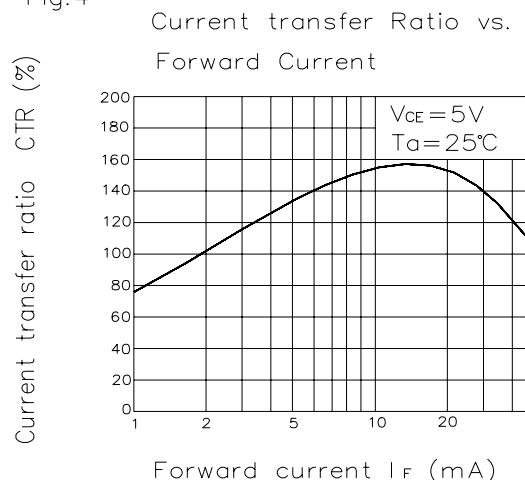


Fig.6


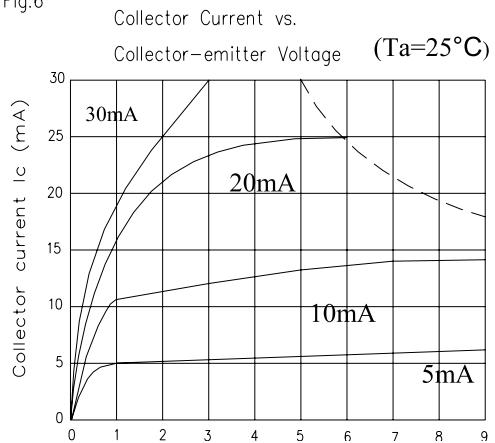


Fig.8

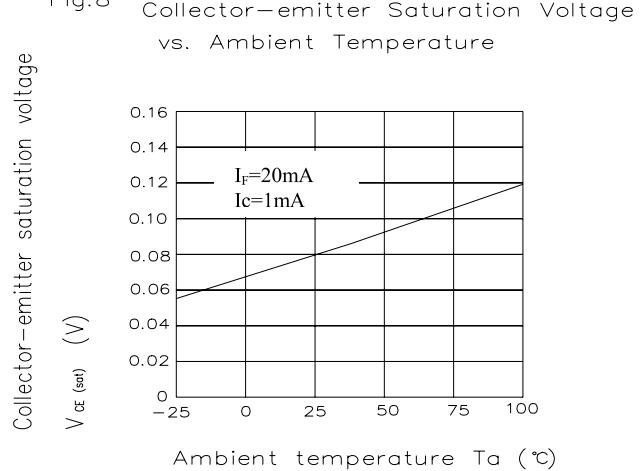

# Technical Data Sheet

## Photocoupler

### EL817 Series

Fig.9

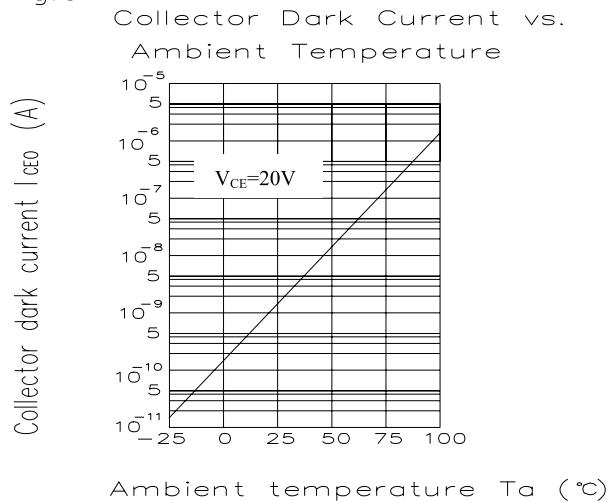


Fig.10



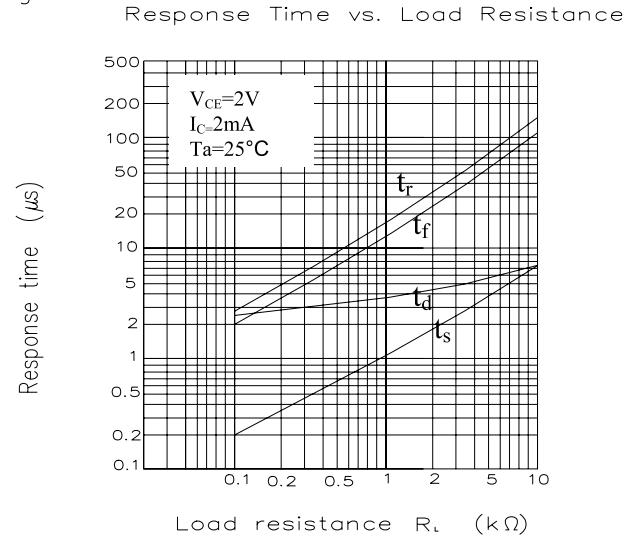


Fig.11

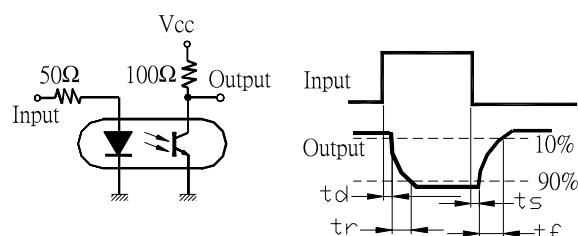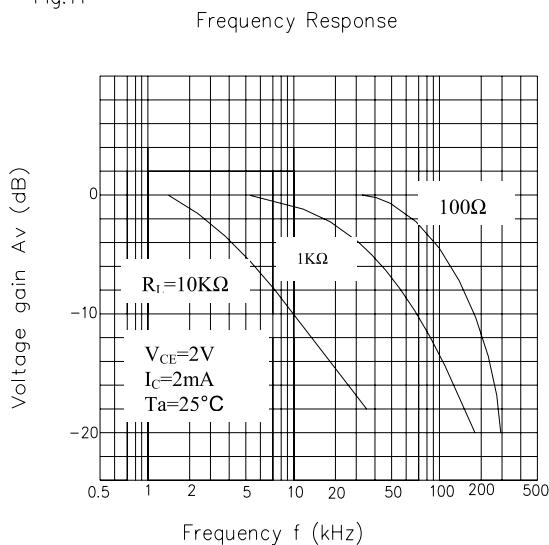

# Technical Data Sheet

## Photocoupler

### EL817 Series

#### RELIABILITY PLAN

- The reliability of products shall be satisfied with items listed below.

Confidence level : 90 % , LTPD : 10 %


| Classification            | Test Item   | Description & Condition  | (Acc.) Sample | Failure Criteria  | Reference Standard                                       |
|---------------------------|---|--|---------------|---|--|
| <b>Endurance test</b>     | Operation Life *                                      | Ta = 25 ± 3°C<br>IR: If = 50 mA<br>Pt: Pc = 130 mW ( Vf=1.4v) , 1000 hrs | 0 / 22        | CTR shift > 1.2<br>Vf > U* 1.0<br>Ir > U * 1.0<br>Vce(sat) >U*1.0<br>Bvceo < L*1.0<br>Bveco < L*1.0 | MIL-S-750 : 1026<br>MIL-S-883 : 1005<br>JIS C 7021 : B-1 |
|                           | High Temperature / High Humidity Reverse Bias (H3TRB) | Ta = 85 ± 3°C , Humi. = 85 % rh<br>Pt: 80% * Vce (max rating) , 1000 hrs | 0 / 22        |   | JIS C 7021 : B-11  |
|                           | High Temperature Reverse Bias (HTRB)                  | Ta = 105 ± 3°C<br>Pt: 100% * Vce (Max rating) , 1000 hrs                 | 0 / 22        |   | JIS C 7021 : B-8   |
|                           | Low Temperature Storage                               | Ta = -50 ± 3°C , 1000 hrs  | 0 / 22        |   | JIS C 7021 : B-12  |
|                           | High Temperature Storage                              | Ta = 125 ± 3°C , 1000 hrs  | 0 / 22        |   | JIS C 7021 : B-10<br>MIL-S-883 : 1008                    |
|                           | Auto clave  | P = 15 PSIG , Ta = 121 °C ,<br>Humi. = 100 % rh , 48 hrs                 | 0 / 22        |   | JESD 22-A102-B   |
| <b>Environmental Test</b> | Temperature Cycling (Air to Air)                      | 125°C ~ -55°C<br>30 ~ 30 min , 100 cycles                                | 0 / 22        | L : Low Spec.Limit<br>U : Up Spec. Limit  | MIL-S-883 :1010<br>JIS C 7021 : A-4                      |
|                           | Thermal Shock (Liquid to Liquid)                      | 125 ~ -55°C<br>t (dwell) = 5 min<br>t (trans.) = 10 sec , 100 cycles     | 0 / 22        |   | MIL-S-202 : 107D<br>MIL-S-750 : 1051<br>MIL-S-883 :1011  |
|                           | Solder Resistance                                     | Ta = 260 ± 3°C<br>t (dwell) = 10 ± 1 sec                                 | 0 / 22        |   | MIL-S-750 : 2031<br>JIS C 7021 : A-1                     |
|                           | Solder Ability  | Ta = 230 ± 3 °C<br>t (dwell) = 5 ± 1 sec                                 | 0 / 22        |   | MIL-S-883 : 2003<br>JIS C 7021 : A-2                     |

## Technical Data Sheet Photocoupler


### EL817 Series

#### 1. Tube Packing Specifications ( For Dip & M Type)


##### 1. Tube

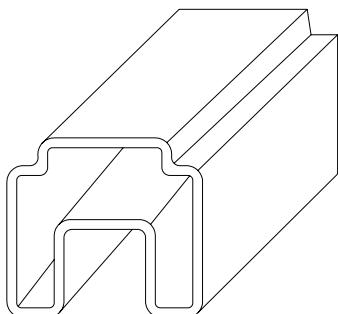

##### 2. Inner Carton

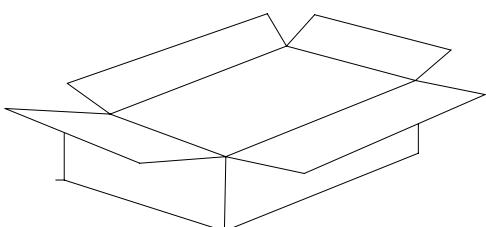

##### 3. Outside Carton

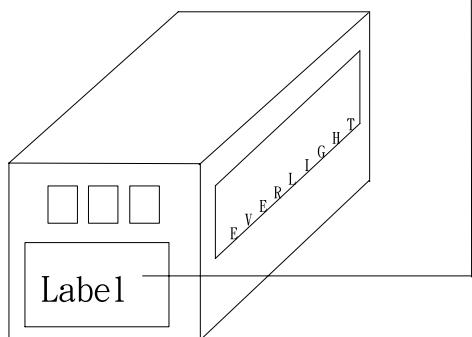

EVERLIGHT

CPN:

P/N:



EL817

QTY:



CAT: -

HUE: -

REF: -

LOT NO:

MADE IN TAIWAN



#### ● Packing Quantity

1. 100 Pcs/ Per Tube
2. 25 Tubes / Inner Carton
3. 12 Inner Cartons / Outside Carton



## Technical Data Sheet

### Photocoupler


#### EL817 Series

##### 1. Tape & Reel Packing Specifications

###### 1. Tape & Reel (For S Type only)

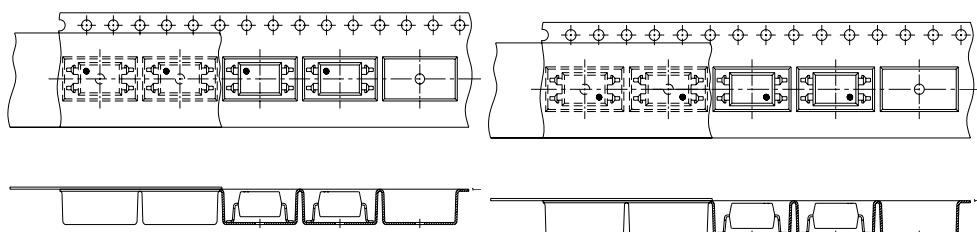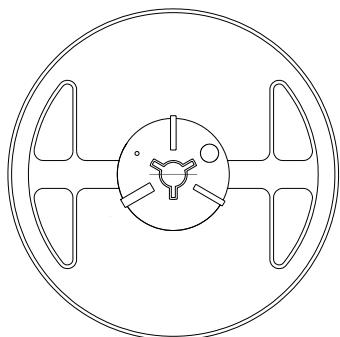**TA****TB**

##### 2. Inner Carton

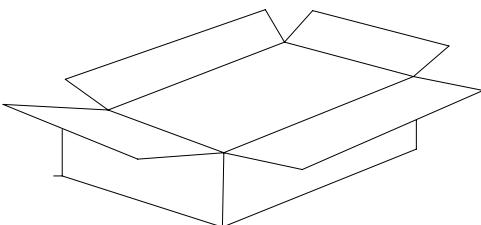

EVERLIGHT

CPN:

P/N:



EL817

QTY:




CAT:

HUE:

REF:

LOT NO:

##### 3. Outside Carton

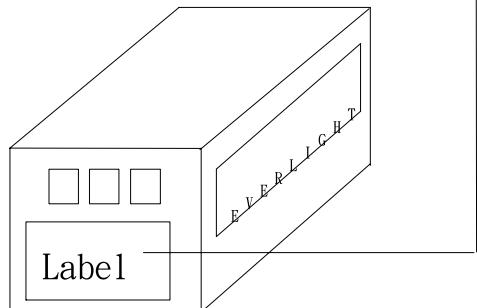

MADE IN TAIWAN



##### ● Packing Quantity

1. 1,000 Pcs / Per Reel
2. 3 Reels / Inner Carton
3. 10 Inner Cartons / Outside Carton