


# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

**6N138 6N139**

## Features:

- High current transfer ratio – 2000% typical
- High isolation voltage between input and output ( $V_{iso}=5000$  Vrms )
- Guaranteed performance from 0°C to 70°C
- Pb free and RoHS compliant.
- UL approved (No. 214129)
- VDE approved (No. 132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CSA approved (No. 2037145)

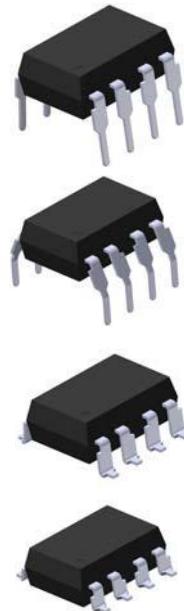

## Description


The 6N138 and 6N139 devices each consists of an infrared emitting diode, optically coupled to a high gain split Darlington photo detector. They provide extremely high current transfer ratio between input and output, with access to a base terminal to adjust the gain bandwidth.

These devices are packaged in an 8-pin DIP package and available in wide-lead spacing and SMD options.

## Applications

- Digital logic ground isolation
- RS-232C line receiver
- Low input current line receiver
- Microprocessor bus isolation
- Current loop receiver

## Schematic

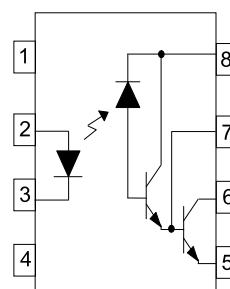

## Pin Configuration

1. No Connection
2. Anode
3. Cathode
4. No Connection
5. Gnd
6. Vout
7.  $V_B$
8.  $V_{cc}$

# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

**6N138 6N139**

## Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ unless otherwise specified)

Parameter		Symbol	Rating	Unit	
Input	Forward current	$I_F$	20	mA	
	Peak forward current (50% duty, 1ms P.W)	$I_{FP}$	40	mA	
	Peak transient current ( $\leq 1 \mu\text{s}$ P.W, 300pps)	$I_{F\text{trans}}$	1	A	
	Reverse voltage	$V_R$	5	V	
	Power dissipation	$P_{IN}$	45	mW	
Output	Power dissipation	$P_O$	100	mW	
	Output current	$I_O$	60	mA	
	Emitter-Base Reverse Voltage	$V_{ER}$	0.5	V	
	Output voltage	$V_O$	-0.5 to 7	V	
			-0.5 to 18	V	
	Supply voltage	$V_{CC}$	-0.5 to 7	V	
			-0.5 to 18	V	
Isolation voltage <sup>*1</sup>		$V_{ISO}$	5000	V rms	
Operating temperature		$T_{OPR}$	-40 ~ +85	°C	
Storage temperature		$T_{STG}$	-55 ~ +125	°C	
Soldering temperature <sup>*2</sup>		$T_{SOL}$	260	°C	

### Notes

<sup>\*1</sup> AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2, 3, 4 are shorted together, and pins 5, 6, 7, 8 are shorted together.

<sup>\*2</sup> For 10 seconds.

# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

**6N138 6N139**

## Electrical Characteristics ( $T_a=0$ to $70^\circ\text{C}$ unless specified otherwise)

### Input

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Forward voltage	$V_F$	-	1.3	1.7	V	$I_F = 1.6\text{mA}$
Reverse Voltage	$V_R$	5.0	-	-	V	$I_R = 10\mu\text{A}$ , $TA=25^\circ\text{C}$
Temperature coefficient of forward voltage	$\Delta V_F/\Delta T_A$	-	-1.8	-	mV/ $^\circ\text{C}$	$I_F = 1.6\text{mA}$

### Output

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Logic High Output Current	$I_{OH}$	-	0.01	100	$\mu\text{A}$	$I_F=0\text{mA}$ , $V_O=V_{CC}=18\text{V}$
6N138	6N139	-	-	250		
Logic Low Supply Current	$I_{CCL}$	-	0.6	1.5	mA	$I_F=1.6\text{mA}$ , $V_O=\text{Open}$ , $V_{CC}=18\text{V}$
Logic High Supply Current	$I_{CCH}$	-	0.05	10	$\mu\text{A}$	$I_F=0\text{mA}$ , $V_O=\text{Open}$ , $V_{CC}=18\text{V}$

### Transfer Characteristics ( $T_a=0$ to $70^\circ\text{C}$ unless specified otherwise, $V_{CC}=4.5\text{V}$ )

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Current Transfer Ratio	6N139	CTR	400	2500	-	$I_F = 0.5\text{mA}$ , $V_O = 0.4\text{V}$ , $V_{CC}=4.5\text{V}$
			500	2000	-	
	6N138	6N139	300	2000	-	
Logic Low Output Voltage	6N139	$V_{OL}$	-	0.05	0.4	$I_F = 0.5\text{mA}$ , $I_O = 2\text{mA}$ , $V_{CC}=4.5\text{V}$
			-	0.09	0.4	
			-	0.12	0.4	
			-	0.17	0.4	
	6N138	6N139	-	0.06	0.4	$I_F = 1.6\text{mA}$ , $I_O = 4.8\text{mA}$ , $V_{CC}=4.5\text{V}$

\* Typical values at  $T_a = 25^\circ\text{C}$

# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

**6N138 6N139**

## Switching Characteristics ( $T_a=0$ to $70^\circ\text{C}$ unless specified otherwise, $V_{cc}=5\text{V}$ )

Parameter	Symbol	Min.	Typ.*	Max.	Unit	Condition
Propagation Delay Time to Logic Low (Fig. 13)	6N139	TPHL	-	5	25	$I_F = 0.5\text{mA}, R_L = 4.7\text{k}\Omega, T_A = 25^\circ\text{C}$
			-	-	30	
			-	0.2	1	
			-	-	2	
			-	1.4	10	
			-	-	15	
Propagation Delay Time to Logic High (Fig. 13)	6N139	TPLH	-	16	60	$I_F = 0.5\text{mA}, R_L = 4.7\text{k}\Omega, T_A = 25^\circ\text{C}$
			-	-	90	
			-	1.7	7	
			-	-	10	
			-	8	35	
			-	-	50	
Common Mode Transient Immunity at Logic High (Fig. 14) <sup>*3</sup>	CM <sub>H</sub>	1,000	-	-	V/μs	$I_F = 0\text{mA}, V_{CM} = 10\text{Vp-p}, R_L = 2.2\text{K}\Omega, T_A = 25^\circ\text{C}$
Common Mode Transient Immunity at Logic Low (Fig. 14) <sup>*3</sup>	CM <sub>L</sub>	1,000	-	-	V/μs	$I_F = 1.6\text{mA}, V_{CM} = 10\text{Vp-p}, R_L = 2.2\text{K}\Omega, T_A = 25^\circ\text{C}$

\* Typical values at  $T_a = 25^\circ\text{C}$

# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139

## Typical Performance Curves

Fig.1 LED Forward Current vs. Forward Voltage

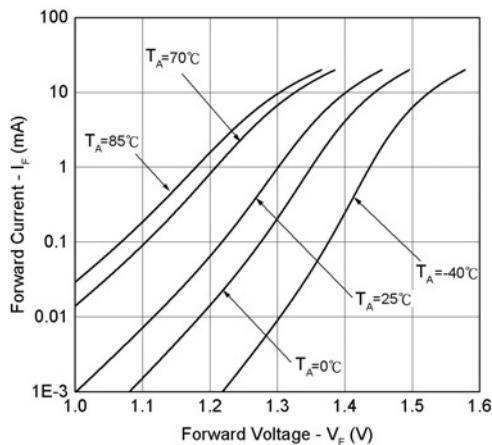


Fig.2 LED Forward Voltage vs. Temperature

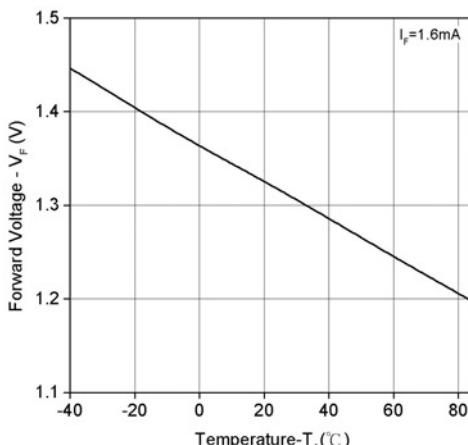


Fig.3 Output Current vs. Output Voltage

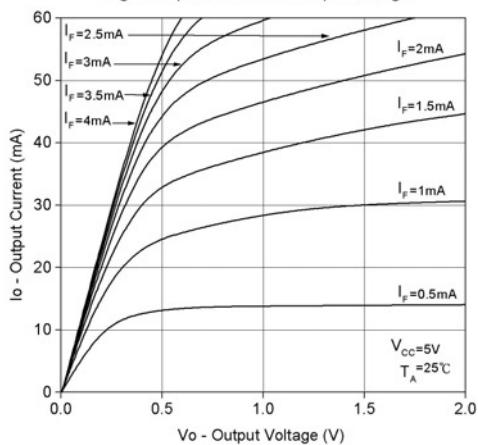


Fig.4 Output Current vs. Input Diode Forward Current

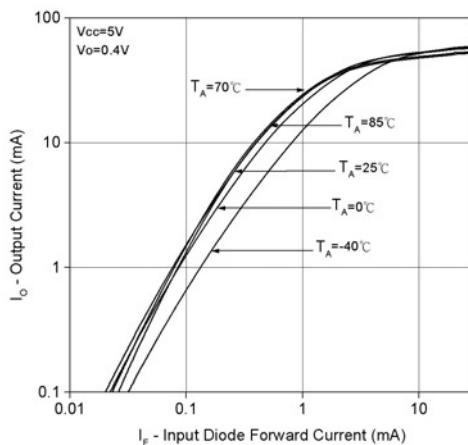


Fig.5 Current Transfer Ratio vs. Forward Current


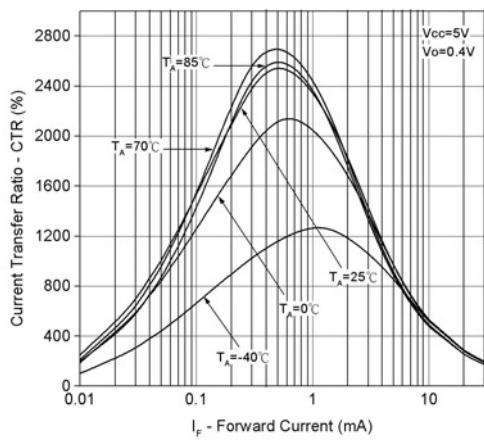


Fig.6 Current Transfer Ratio vs. Base-Emitter Resistance

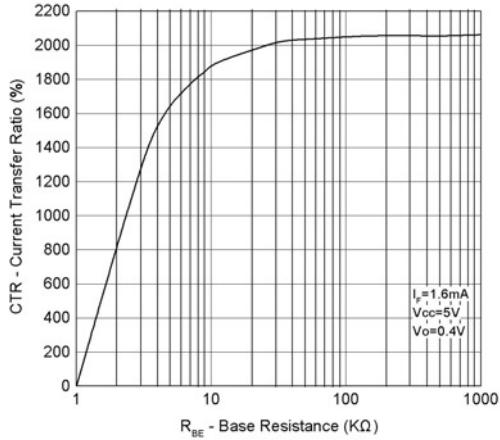

## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

**6N138 6N139**

Fig.7 Non-saturated Rise and Fall Times  
vs. Load Resistance

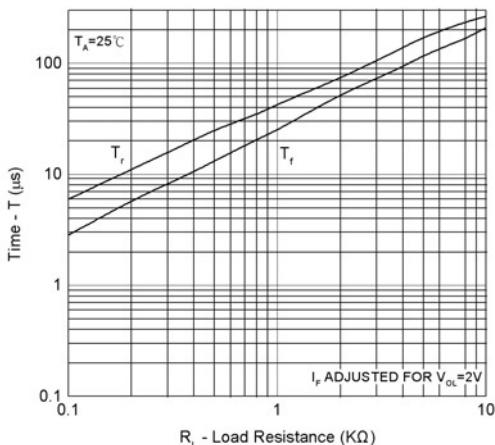


Fig.8 Propagation Delay To Logic Low  
vs. Base-Emitter Resistance

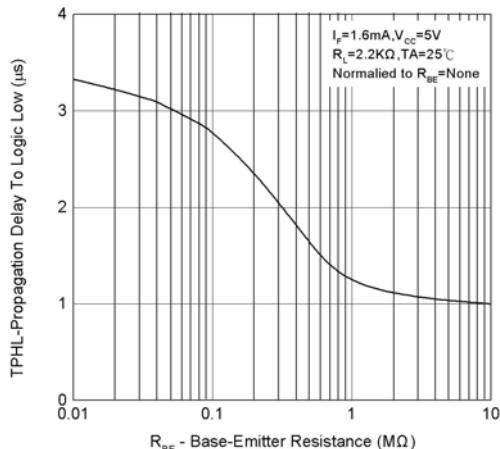


Fig.9 Propagation Delay vs. Input Diode Forward Current

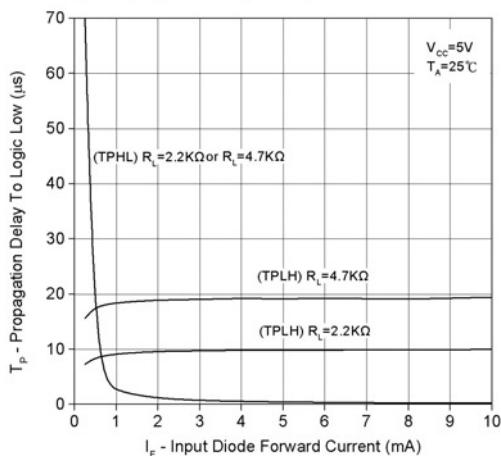


Fig.10 Propagation Delay to Logic Low vs. Pulse Period

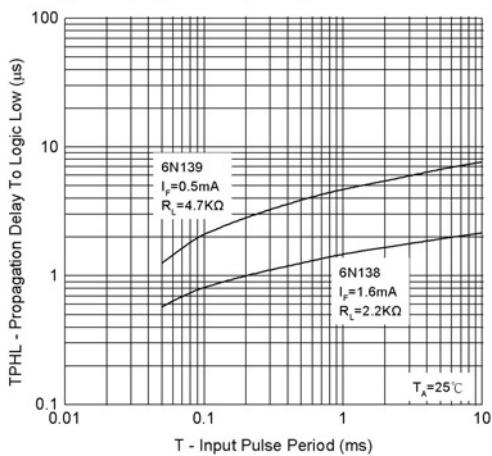


Fig.11 Propagation Delay vs. Temperature


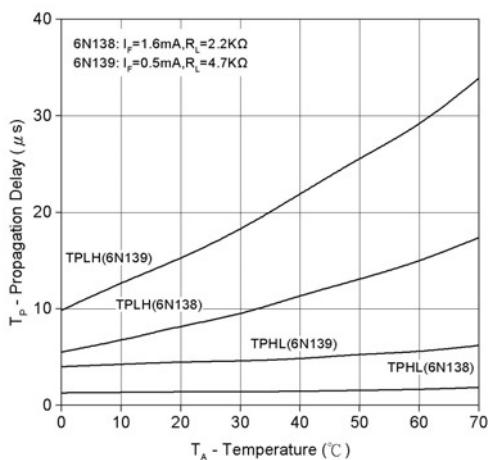


Fig.12 Logic Low Supply Current vs. Input Diode Forward Current

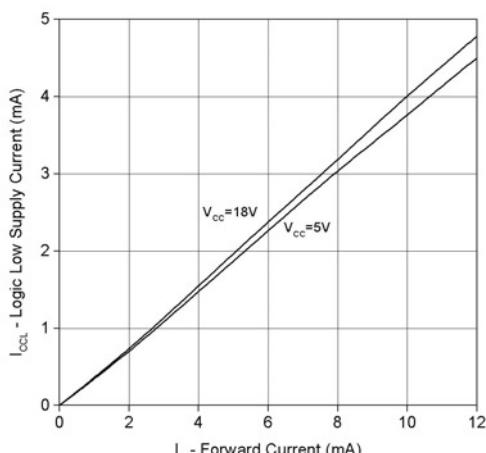

## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139

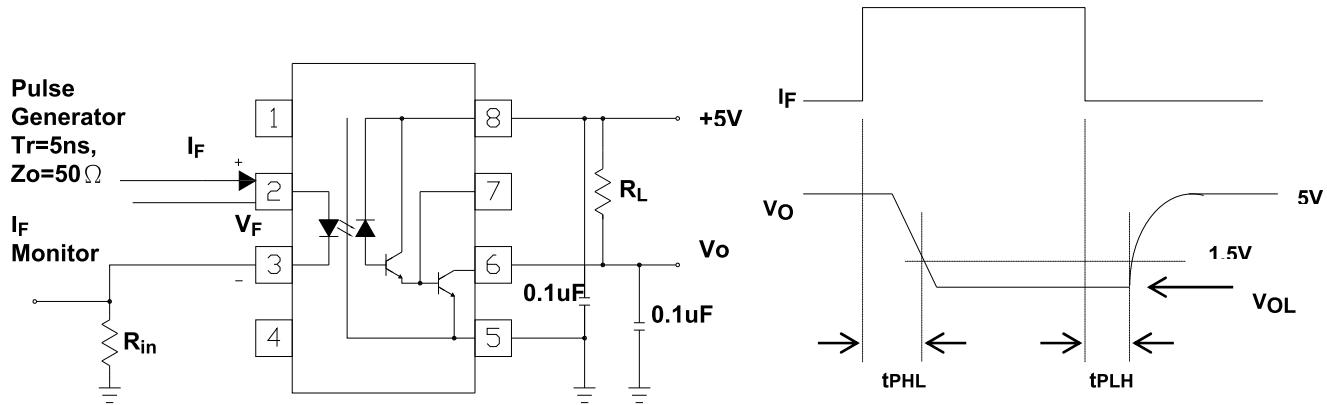


Fig. 13 Switching Time Test Circuit and Waveform

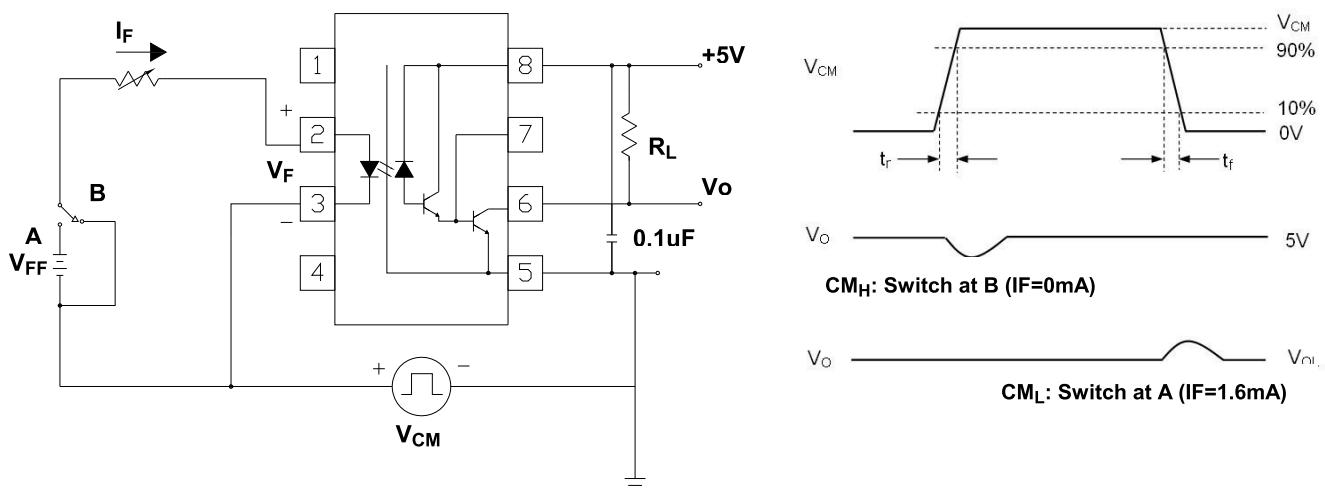


Fig. 14 Common Mode Transient Immunity Test Circuit and Waveform

**Note:**

\*3 Common mode transient immunity in logic high level is the maximum tolerable (positive)  $dV_{cm}/dt$  on the leading edge of the common mode pulse signal  $V_{CM}$ , to assure that the output will remain in a logic high state (i.e.,  $V_O > 2.0\text{V}$ ).

Common mode transient immunity in logic low level is the maximum tolerable (negative)  $dV_{cm}/dt$  on the trailing edge of the common mode pulse signal  $V_{CM}$ , to assure that the output will remain in a logic low state (i.e.,  $V_O < 0.8\text{V}$ ).



# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139

## Order Information

### Part Number

**6N13XY(Z)-V**

### Note

- X = Part No. (X = 8 or 9)
- Y = Lead form option (S, S1, M or none)
- Z = Tape and reel option (TA, TB or none).
- V = VDE (optional)


Option	Description	Packing quantity
None	Standard DIP-8	45 units per tube
M	Wide lead bend (0.4 inch spacing)	45 units per tube
S (TA)	Surface mount lead form + TA tape & reel option	1000 units per reel
S (TB)	Surface mount lead form + TB tape & reel option	1000 units per reel
S1 (TA)	Surface mount lead form (low profile) + TA tape & reel option	1000 units per reel
S1 (TB)	Surface mount lead form (low profile) + TB tape & reel option	1000 units per reel

# 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED


6N138 6N139

## Package Drawing (Dimensions in mm)

### Standard DIP Type

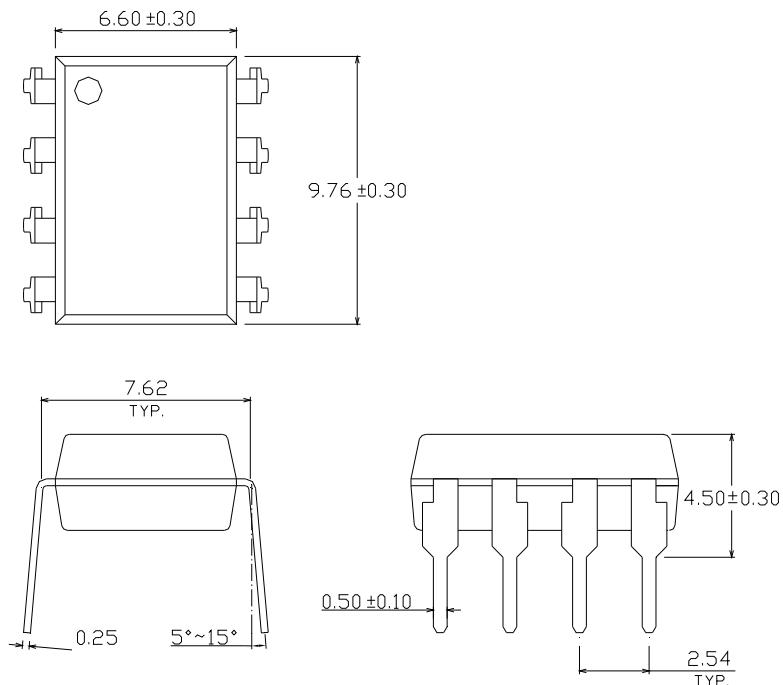


### Option M Type

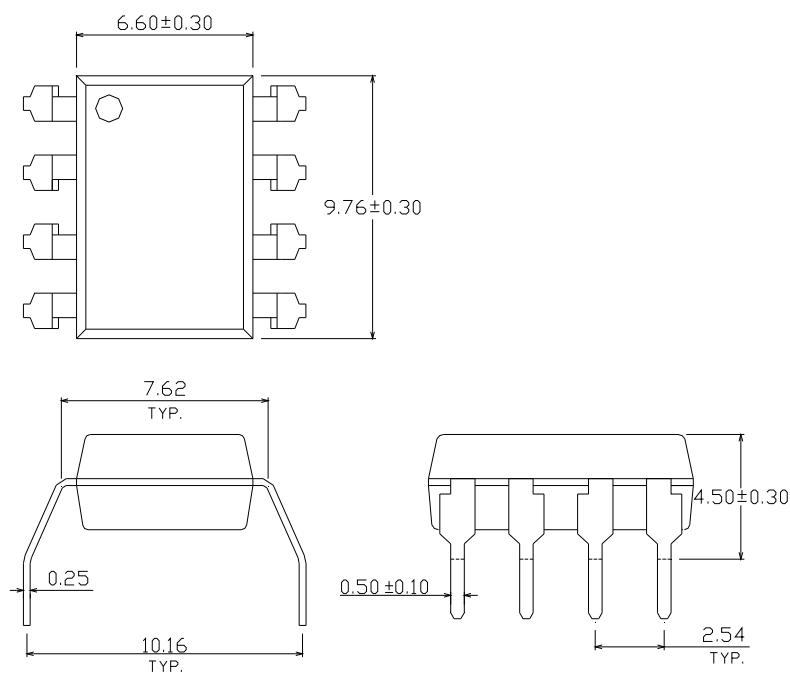


## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139

### Option S Type

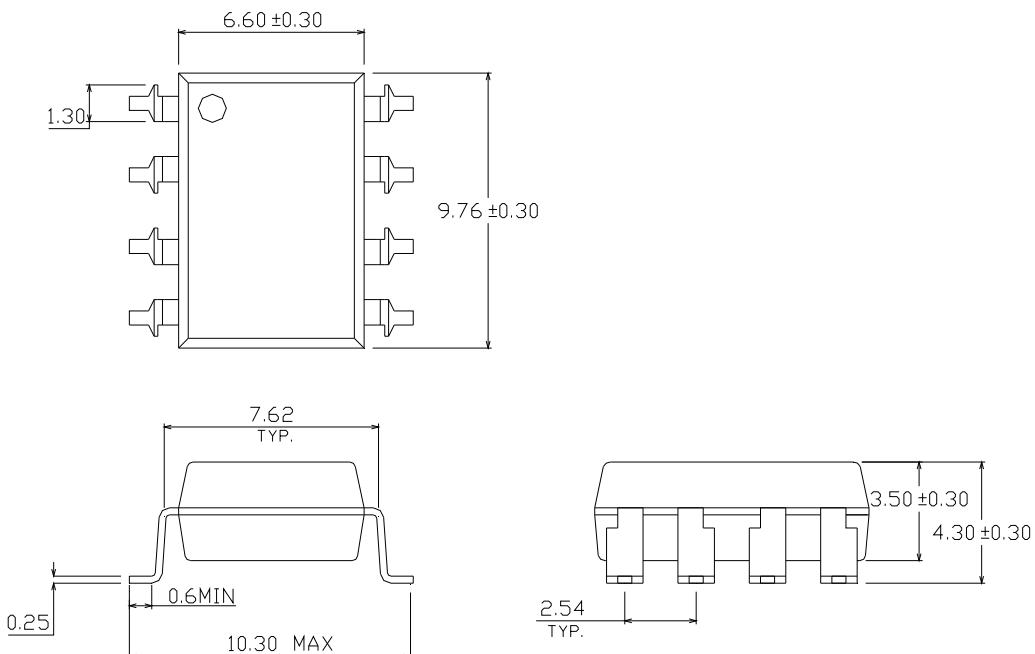


### Option S1 Type

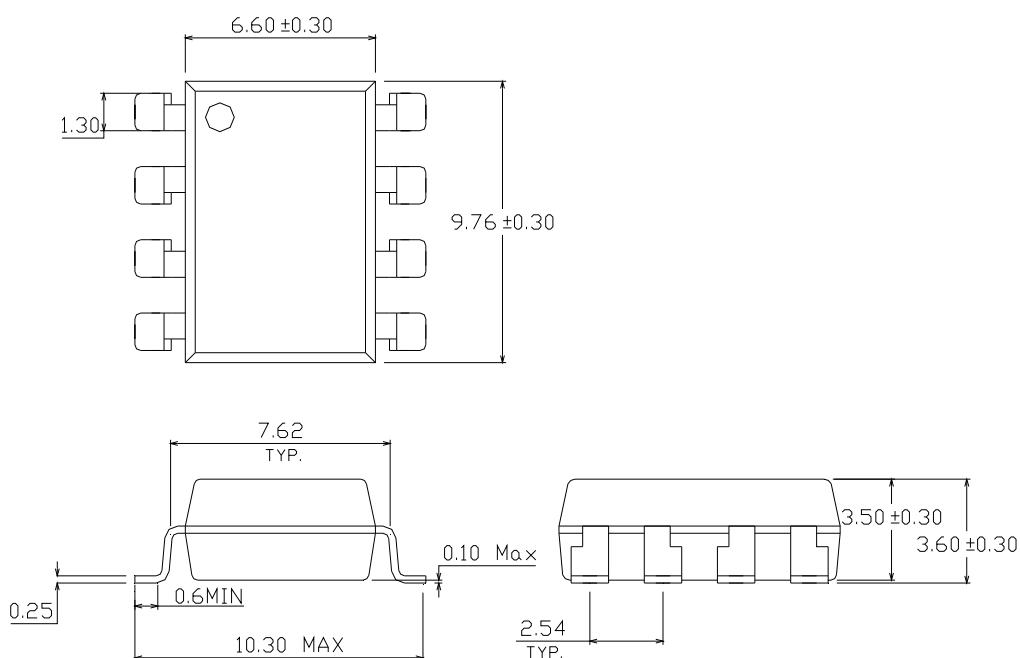


## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139

Recommended pad layout for surface mount leadform

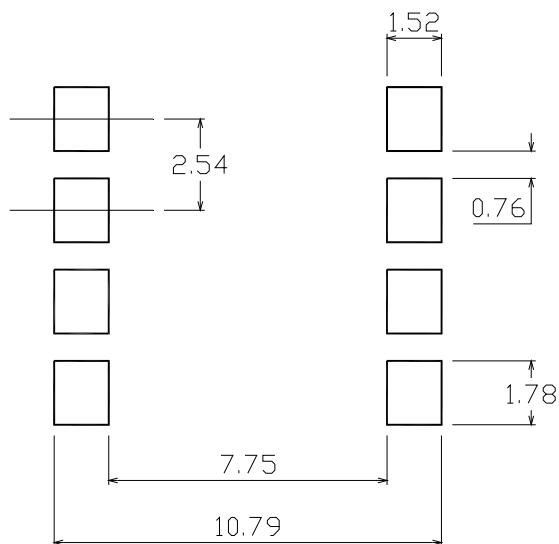

### Device Marking

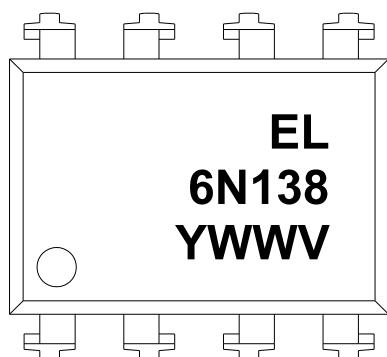

### Notes



6N138 denotes Device Number  
Y denotes 1 digit Year code  
WW denotes 2 digit Week code  
V denotes VDE (Optional)

## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLED

6N138 6N139



### Tape & Reel Packing Specifications

Option TA

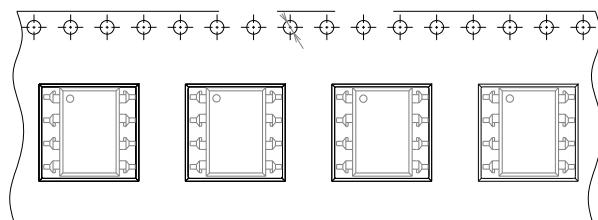


Direction of feed from reel

Option TB

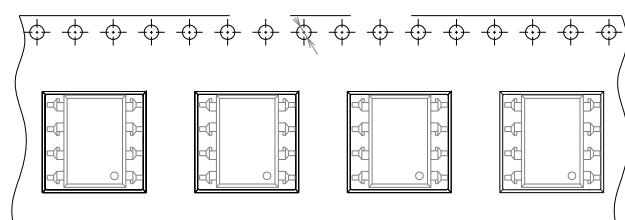

Direction of feed from reel

### Tape dimensions

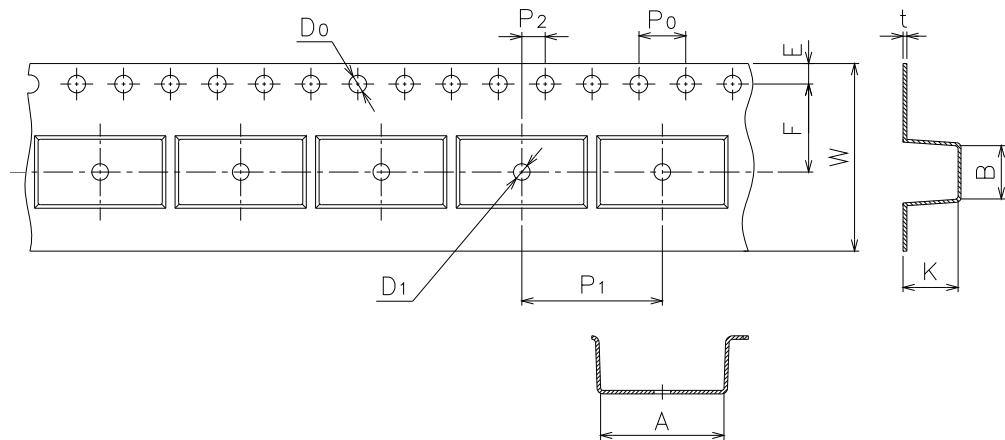


Dimension No.	A	B	D <sub>0</sub>	D <sub>1</sub>	E	F
Dimension(mm)	10.4±0.1	10.0±0.1	1.5±0.1	1.5±0.1	1.75±0.1	7.5±0.1
Dimension No.	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	t	W	K
Dimension(mm)	4.0±0.1	12.0±0.1	2.0±0.1	0.4±0.1	16.0+0.3/-0.1	4.5±0.1

## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLER

6N138 6N139

### Solder Reflow Temperature Profile

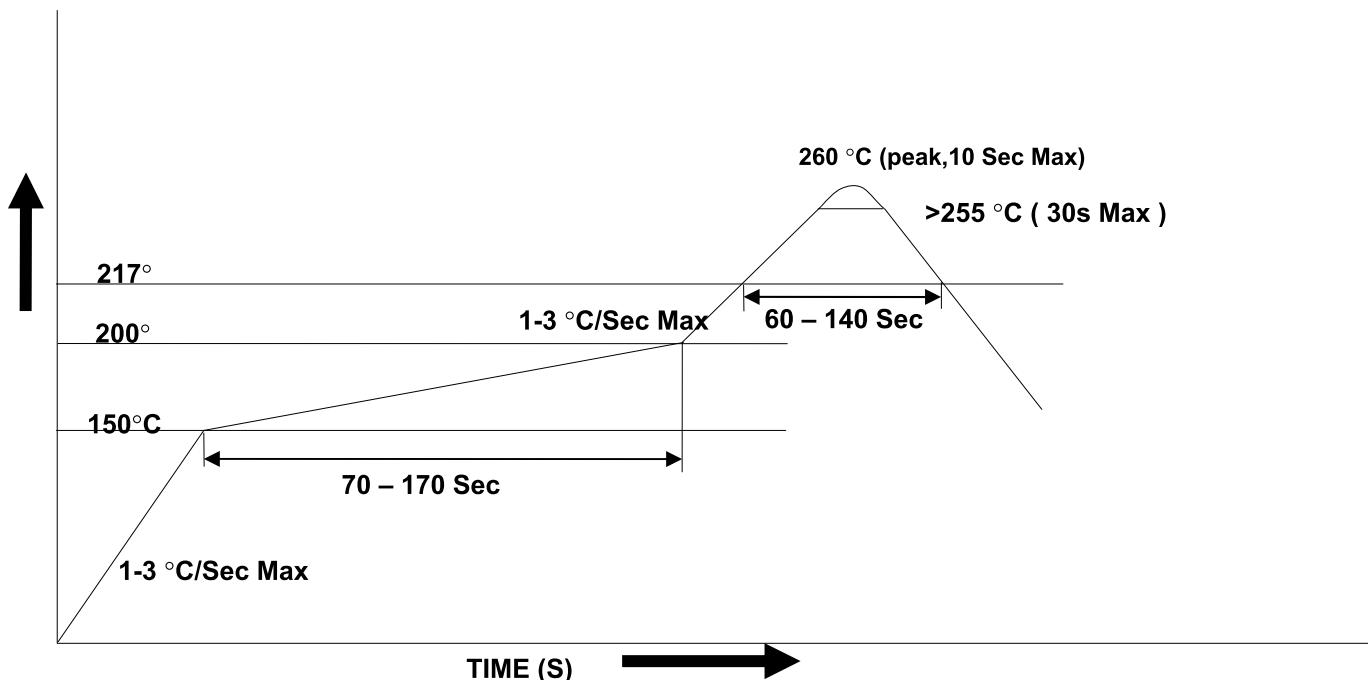



## 8 PIN DIP LOW INPUT CURRENT HIGH GAIN SPLIT DARLINGTON PHOTOCOUPLER

6N138 6N139

### DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.