
SHxx-5,08-K



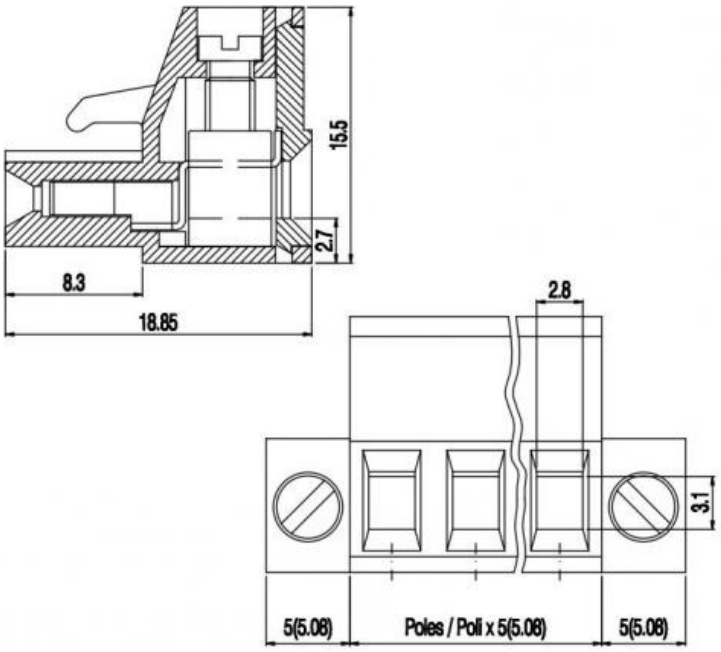

GENERAL INFORMATIONS

pitch:	5,08 mm
housing height:	15,50 mm
housing depth:	18.85 mm
dimensional class:	medium
wire section:	2.5 mm² / 14 AWG
clamp opening size:	2.8 × 3.1 mm
wire stripping:	max 8 mm
operating temperature:	-30°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.5 Nm / 4.5 in.lbs

APPROVALS DATA

	EN 61984	EN 61984	UL 1059
current:	12A	12A	12A factory / 12A field
voltage:	250V	250V	300V
wire section:	2.5mm ^{2}	2.5mm ^{2}	14÷30AWG
torque:	0.5Nm	0.5Nm	4.5Lb-in
FILE:	CA02.04178	40005779	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickeled copper alloy
terminal:	Copper alloy

AVAILABLE COLOURS

GN GY BK BL RD YL OR

other colours: upon request

Copyright ©2012 - euroclamp - http://www.euroclamp.it

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	SH02-5,08-K	N/A	N/A	N/A
03	SH03-5,08-K	N/A	N/A	N/A
04	SH04-5,08-K	N/A	N/A	N/A
05	SH05-5,08-K	N/A	N/A	N/A
06	SH06-5,08-K	N/A	N/A	N/A
07	SH07-5,08-K	N/A	N/A	N/A
08	SH08-5,08-K	N/A	N/A	N/A
09	SH09-5,08-K	N/A	N/A	N/A
10	SH10-5,08-K	N/A	N/A	N/A
11	SH11-5,08-K	N/A	N/A	N/A
12	SH12-5,08-K	N/A	N/A	N/A
13	SH13-5,08-K	N/A	N/A	N/A
14	SH14-5,08-K	N/A	N/A	N/A
15	SH15-5,08-K	N/A	N/A	N/A
16	SH16-5,08-K	N/A	N/A	N/A
17	SH17-5,08-K	N/A	N/A	N/A
18	SH18-5,08-K	N/A	N/A	N/A
19	SH19-5,08-K	N/A	N/A	N/A
20	SH20-5,08-K	N/A	N/A	N/A
21	SH21-5,08-K	N/A	N/A	N/A
22	SH22-5,08-K	N/A	N/A	N/A

Copyright ©2012 - euroclamp - http://www.euroclamp.it