

Series 385


Terminal Blocks for PC-Boards Screwless, Push Button Type

385系列

印刷線路板用接線端子座 - 按鈕式免螺絲

Front Wire Inlet Type - Spacing 5.0mm, 10.0mm, 5.08mm, 10.16mm. Height Over PC-Board 15.45mm

前方入線型 - 間距5.0mm, 10.0mm, 5.08mm, 10.16mm, 殼體高度15.45mm

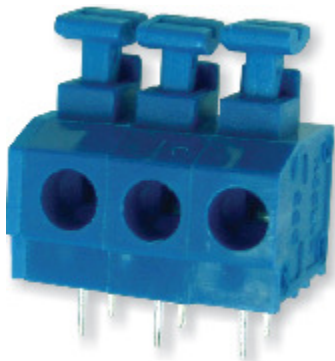

385-031-12-00




** Notice:

To avoid accumulating tolerance-variations of Terminal Blocks, limit the number of contacts to no more than 24 contacts per row

Recommended PC-Board-Holes
diameter : Ø1.2mm to Ø1.4mm
n = number of contacts



** 為防止累積公差過大，接線端子座建議每排不超過24位

建議底孔直徑：Ø1.2mm 至 Ø1.4mm
n = 觸點的數量



12.5/.492"

PITCH	Dimension A	Dimension B	Dimension C
5mm	n x 5	(n - 1) x 5	5
10mm	n x 10	(n - 1) x 10	10
5.08mm	n x 5.08	(n - 1) x 5.08	5.08
10.16mm	n x 10.16	(n - 1) x 10.16	10.16

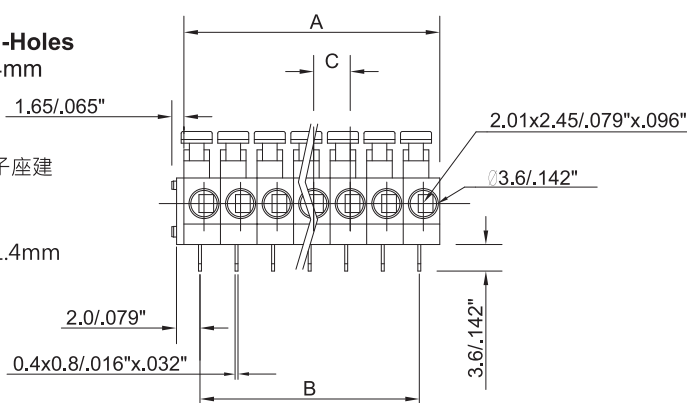

3 8 5 - X X X - 1 X - 0 0

Series No.
系列編號

No. of Pole
針腳數目

Pitch 間距

1	5.0mm
2	10.0mm
3	5.08mm
4	10.16mm

Color 顏色

1	Grey	灰
2	Blue	藍
3	Black	黑

MATERIAL 材料

- **Contact 觸點(metal housing 金屬殼體):**
Brass, Tin plated / 黃銅 · 銅錫電鍍
- **Contact Spring 觸點彈簧:**
Stainless strip steel / 不鏽鋼片
- **Surface of Solder Tail 針腳電鍍:**
Tin plated / 鍍錫
- **Insulator Body 絕緣體(housing 殼體)**
Polyamide PA66 (UL 94 V-0) / 尼龍PA66 (UL 94 V-0)

ELECTRICAL 電機方面

- **Current Rating 工作電流:** 10 Amp
- **Dielectric Strength 電介質:** 2500V
- **Rated Voltage 額定電壓:** 250V
- **AWG 適用線號:** 20 - 16
- **Resistance to Tracking 絕緣阻值:** 5MΩ
- **Insulation Withstands Voltage 耐電壓:** AC1500V/Min
- **Stripping Length 剝線長度:** 9.0 - 10.0mm

MECHANICAL 機械方面

- **Operating Temperature 工作溫度:** -30°C to +120°C
- **Short Time Peak Temperature 短暫能容溫度:** +200°C max