



■ Features :


- Universal AC input / Full range
- Protections: Short circuit / Over current / Over voltage
- · Cooling by free air convection
- Built-in constant current limiting circuit with adjustable OCP level
- Optional dimming function : 1.1~10VDC (D type) or PWM (P type) controlled
- Fully isolated plastic case with IP64 level
- Class 2 power unit
- Pass LPS
- Suitable for LED lighting and moving sign applications (Note.8)
- 100% full load burn-in test
- Low cost
- 2 years warranty

SPECIFICATION

□ LPS IP64 **%** (for 48V only) c **%** US (except for 48V) C €

MODEL		ELN-30-5	ELN-30-9	ELN-30-12	ELN-30-15	ELN-30-24	ELN-30-27	ELN-30-48
ОИТРИТ	DC VOLTAGE	5V	9V	12V	15V	24V	27V	48V
	LED OPERATION VOLTAGE Note.7	3 ~ 5V	3 ~ 9V	3 ~ 12V	3~15V	3 ~ 24V	3 ~ 27V	3 ~ 48V
	RATED CURRENT	5A	3.4A	2.5A	2A	1.25A	1.12A	0.63A
	CURRENT RANGE	0 ~ 5A	0 ~ 3.4A	0 ~ 2.5A	0~2A	0 ~ 1.25A	0 ~ 1.12A	0 ~ 0.63A
	RATED POWER	25W	30.6W	30W	30W	30W	30.24W	30.24W
	RIPPLE & NOISE (max.) Note 2	80mVp-p	100mVp-p	120mVp-p	120mVp-p	150mVp-p	150mVp-p	250 mVp-p
	VOLTAGE ADJ. RANGE	4.5 ~ 5.5V	8.7 ~ 10.5V	10.8 ~ 13.2V	13.5 ~ 16.5 V	21.6 ~ 26.4V	24.3 ~ 29.7V	43.2 ~ 52.8V
		Can be adjusted by internal potentiometer SVR1						
	CURRENT ADJ. RANGE	-25% ~ 3%. Can be adjusted by internal potentiometer SVR2						
	VOLTAGE TOLERANCE Note.3	, , ,						
	LINE REGULATION	±1.0%						
	LOAD REGULATION	±2.0%						
		500 ms, 80 ms / 230 VAC 1000 ms, 80 ms / 115 VAC at full load						
	HOLD UP TIME (Typ.)	50ms/230VAC 16ms/115VAC at full load						
		90 ~ 264VAC 127 ~ 370VDC						
INPUT	FREQUENCY RANGE	47 ~ 63Hz	127 070400					
	EFFICIENCY (Typ.)	75%	80%	82%	82%	85%	85%	87%
	AC CURRENT (Typ.)		0.48A/230VAC	10270	0270	100 //	10070	0.70
	INRUSH CURRENT (max.)	COLD START 55A(twidth=465 μ s measured at 50% I _{peak}) at 230VAC						
	LEAKAGE CURRENT	0.25mA/240VAC						
	LEARAGE CONNENT	95 ~ 110%						
PROTECTION	OVER CURRENT	95 ~ 110% Protection type: Constant current limiting, recovers automatically after fault condition is removed						
	OVER VOLTAGE	5.75 ~ 6.75V	11 ~ 13.5V	13.8 ~ 16V	17.5 ~ 21V	28 ~ 32V	31 ~ 36.4 V	54 ~ 60V
						20 02 0	01 00.41	04 000
FUNCTION	DIMMING CONTROL (OPTIONAL)	Protection type: Shut down o/p voltage, re-power on to recover 1.1 ~ 10VDC or PWM signal: 100Hz ~ 3KHz						
1011011011	WORKING TEMP.	-20 ~ +60°C (Refer to "Derating Curve")						
SAFETY & EMC	WORKING HUMIDITY	20 ~ 90% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT							
	VIBRATION	±0.03% (°C (0~50°C)						
		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes						
	SAFETY STANDARDS WITHSTAND VOLTAGE	UL1310, CAN/CSA C22.2 No. 223-M91(except for 48V), IP64 approved; design refer to TUV EN60950-1						
	ISOLATION RESISTANCE	I/P-0/P:3KVAC						
		I/P-O/P:>100M Ohms / 500VDC / 25°C / 70% RH						
	EMC EMISSION	Compliance to EN55022 (CISPR22) Class B, EN61000-3-2 Class A, EN61000-3-3 Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, light industry level, criteria A						
	EMC IMMUNITY				grit iridustry level, t	ліена А		
OTHERS	MTBF		MIL-HDBK-217F	(25 ()				
	DIMENSION	145*47*30mm (L*						
	PACKING	0.26Kg; 60pcs/16	-	/AO:		-1-1		
NOTE	Ripple & noise are measure Tolerance : includes set up Derating may be needed ur The power supply is consid complete installation, the fir Length of set up time is me Constant current operation	Ily mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. ed at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. tolerance, line regulation and load regulation. nder low input voltage. Please check the static characteristics for more details. ered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the nal equipment manufacturers must re-qualify EMC Directive on the complete installation again. asured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. region is within the specified output voltage range above. This is the suitable operation region for LED related applications. ole for lighting applications in EU countries. Please check with your local authorities for the possible use of the unit.						
	File Name:ELN-30-SPEC 20							



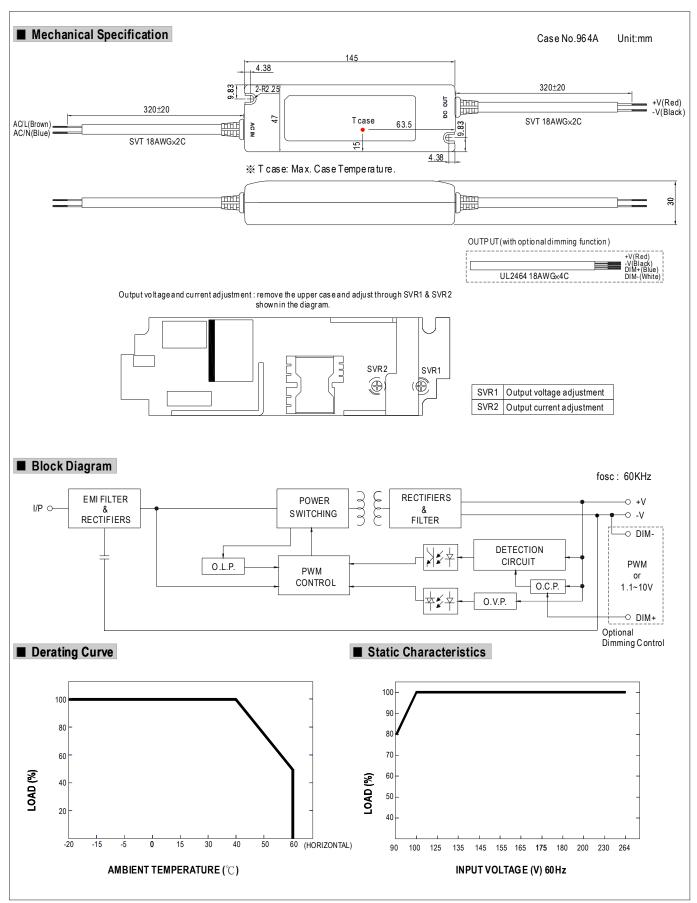






■ Dimming Control (Optional)


Level of output current can be adjusted through the dimming control function.

When there is no signal sending to the control wires (open circuit between the two control wires), the power supply unit will operate as 0V (D-type) or 0% duty (P-type) of input signal and hence the output current will be zero.



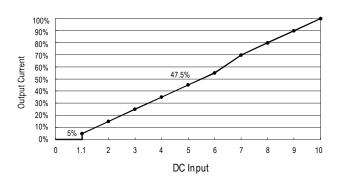





Lo:0V Hi:10V

