


Primary Alkaline Manganese Cylindrical

Data Sheet

Type number	4106
Designation IEC System	LR6 Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	7 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	2.600 (discharge with high-resistance)
Permissible Temperature Range	-20°C...50°C
Weight, approx. [g]	23
Volume [ccm]	7.69
Dimensions [mm]	

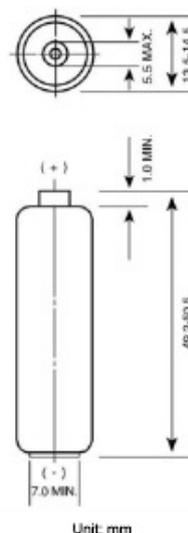

Typical Capacities (at 20°C)

<u>Discharge Type</u>	<u>Load</u>	<u>End Voltage [V]</u>	<u>0.8</u>
1H/D,7D/W	3.9Ω	Time [min]	430
Motor / Toy			
<u>Discharge Type</u>	<u>Load</u>	<u>End Voltage [V]</u>	<u>0.9</u>
1H/D,7D/W	10Ω	Time [h]	19.3
Personal Cassette Players/			
<u>Discharge Type</u>	<u>Load</u>	<u>End Voltage [V]</u>	<u>0.9</u>
4H/D,7D/W	43Ω	Time [h]	92.5
Transistor Radios			

* In consideration of typical loss of capacity at storage and application.