
SEALED POLYCARBONATE AND ABS ENCLOSURES

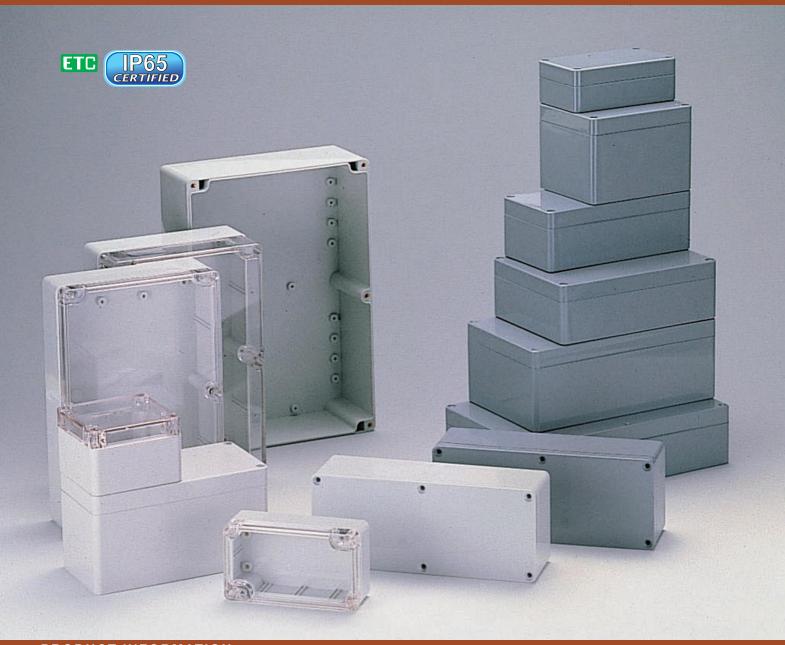

PRODUCT INFORMATION

- The lid and base incorporate a tongue and groove sealing system with a EPDM gasket.
- Wall mounting holes and lid fixing screws are outside the sealing area thus preventing the ingress
 of moisture and dust.
- Designed to IP65 of IEC 529 (Dust and Hoseproof).
- Available with clear or light grey lids.
- Internal guide slots for mounting PCB assemblies vertically.
- Bosses on internal base allow fixing of PCB's horizontally or connection of terminals with M3X4mm self-tapping screws.

PC

- Material: Polycarbonate (UL94-HB)
- Moulded in: Light Grey.
- Operating temperature: -40°C to 120°C.
- Clear lid is available on request.



- Material: High Impact ABS (UL94-HB)
- Moulded in: Dark Grey.
- Operating temperature: -20°C to 80°C

Example







G258 G258C G362

| MATERIAL: POLYCARBONATE | | | | |
|-------------------------|------------|----------|-------|------------|
| ITEM No. | COLOR | ITEM No. | COLOR | |
| II LIVI IVO. | LID BASE | | LID | BASE |
| G201 | Light Grey | G201C | Clear | Light Grey |
| G202 | Light Grey | 1 | Clear | Light Grey |
| G203 | Light Grey | G203C | Clear | Light Grey |
| G205 | Light Grey | G205C | Clear | Light Grey |
| G212 | Light Grey | G212C | Clear | Light Grey |
| G214 | Light Grey | G214C | Clear | Light Grey |
| G218 | Light Grey | G218C | Clear | Light Grey |
| G221 | Light Grey | G221C | Clear | Light Grey |
| G223 | Light Grey | G223C | Clear | Light Grey |
| G229 | Light Grey | G229C | Clear | Light Grey |
| G232 | Light Grey | G232C | Clear | Light Grey |
| G238 | Light Grey | G238C | Clear | Light Grey |
| G250 | Light Grey | G250C | Clear | Light Grey |
| G256 | Light Grey | G256C | Clear | Light Grey |
| G258 | Light Grey | G258C | Clear | Light Grey |
| G265 | Light Grey | G265C | Clear | Light Grey |
| G269 | Light Grey | G269C | Clear | Light Grey |
| G278 | Light Grey | G278C | Clear | Light Grey |
| G279 | Light Grey | G279C | Clear | Light Grey |
| G287 | Light Grey | G287C | Clear | Light Grey |
| G288 | Light Grey | G288C | Clear | Light Grey |
| G2018 | Light Grey | G2018C | Clear | Light Grey |
| G2025 | Light Grey | G2025C | Clear | Light Grey |
| G2029 | Light Grey | G2029C | Clear | Light Grey |
| G2038 | Light Grey | G2038C | Clear | Light Grey |
| G2058 | Light Grey | G2058C | Clear | Light Grey |

| MATERIAL: ABS | | | | |
|---------------|-----------|-----------------|--|--|
| ITEM No. | COLOR | EXTERNAL | | |
| | LID BASE | DIMENSION(mm) | | |
| G302 | Dark Grey | 64 x 58 x 35 | | |
| G303 | Dark Grey | 184 x 36 x 35 | | |
| G304 | Dark Grey | 115 x 65 x 40 | | |
| G308 | Dark Grey | 115 x 65 x 55 | | |
| G311 | Dark Grey | 115 x 90 x 55 | | |
| G313 | Dark Grey | 171 x 121 x 55 | | |
| G317 | Dark Grey | 222 x 146 x 55 | | |
| G331 | Dark Grey | 115 x 90 x 80 | | |
| G340 | Dark Grey | 171 x 121 x 80 | | |
| G346 | Dark Grey | 195 x 80 x 55 | | |
| G353 | Dark Grey | 222 x 146 x 75 | | |
| G378 | Dark Grey | 265 x 185 x 95 | | |
| G362 | Dark Grey | 52 x 50 x 35 | | |
| G366 | Dark Grey | 82 x 80 x 55 | | |
| G368 | Dark Grey | 160 x 80 x 55 | | |
| G369 | Dark Grey | 160 x 80 x 85 | | |
| G373 | Dark Grey | 200 x 120 x 75 | | |
| G386 | Dark Grey | 120 x 120 x 60 | | |
| G387 | Dark Grey | 120 x 120 x 90 | | |
| G396 | Dark Grey | 160 x 160 x 60 | | |
| G399 | Dark Grey | 160 x 160 x 90 | | |
| G3008 | Dark Grey | 240 x 160 x 90 | | |
| G3019 | Dark Grey | 240 x 160 x 120 | | |
| G3028 | Dark Grey | 300 x 230 x 86 | | |
| G3031 | Dark Grey | 300 x 230 x 111 | | |
| G3039 | Dark Grey | 360 x 200 x 150 | | |

Lid fixing screw are M4 stainless steel (non-magnetic) into threaded brass inserts.