


# UT203



[Enlarge](#)

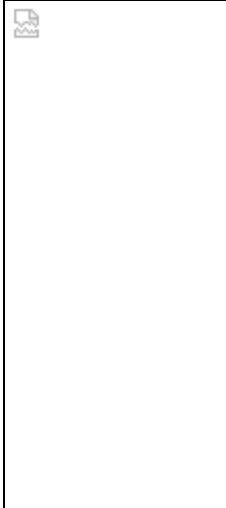

[Download Manual](#)

## Digital Clamp Multimeters

### SPECIFICATIONS

| Basic Functions                            | Range                        | Best Accuracy   |
|--------------------------------------------|------------------------------|-----------------|
| DC Voltage                                 | 400mV/4V/40V/400V/600V       | $\pm (0.8\%+1)$ |
| AC Voltage                                 | 4V/40V/400V/600V             | $\pm (1\%+5)$   |
| DC Current                                 | 40A/400A                     | $\pm (2\%+3)$   |
| AC Current                                 | 40A/400A                     | $\pm (2.5\%+5)$ |
| Resistance                                 | 400W/4kW/40kW/400kW/4MW/40MW | $\pm (1\%+2)$   |
| Frequency                                  | 10Hz~1MHz                    | $\pm (0.1\%+3)$ |
| Duty Cycle                                 | 0.1%~99.9%                   | ✓               |
| Special Functions                          |                              |                 |
| Auto Ranging                               |                              | ✓               |
| Diode                                      |                              | ✓               |
| Continuity Buzzer                          |                              | ✓               |
| Data Hold                                  |                              | ✓               |
| Full Icon Display                          |                              | ✓               |
| Sleep Mode                                 |                              | ✓               |
| Low Battery Display                        |                              | ✓               |
| Input Impedance for DC Voltage Measurement | Around 10MW                  | ✓               |
| Max. Display                               | 3999                         | ✓               |

### GENERAL CHARACTERISTICS

|                              |                                                      |
|------------------------------|------------------------------------------------------|
| Power                        | 9V Battery (6F22)                                    |
| LCD Size                     | 35.6 x 18 mm                                         |
| Product Colour               | Red and Grey                                         |
| Product Net Weight           | 200g                                                 |
| Product Size                 | 210 x 75.6 x 30mm                                    |
| Standard Accessories         | Test Lead, English Manual, Carrying Bag              |
| Standard Individual Packing  | Gift Box                                             |
| Standard Quantity Per Carton | 40 pcs                                               |
| Standard Carton Measurement  | 510 x 490 x 330mm<br>(0.082 CBM Per Standard Carton) |
| Standard Carton Gross Weight | 15kg                                                 |

\*Available at Extra Cost

Specifications and other information are subject to change without further notice.

[Back to main menu](#)